

## Nominal data

|                               |                   |      |      |
|-------------------------------|-------------------|------|------|
| Type                          | A2S130-AA03-30    |      |      |
| Motor                         | M2S052-CA         |      |      |
| Phase                         |                   | 1~   | 1~   |
| Nominal voltage               | VAC               | 230  | 230  |
| Frequency                     | Hz                | 50   | 60   |
| Type of data definition       |                   | fa   | fa   |
| Valid for approval / standard |                   | CE   | CE   |
| Speed                         | min <sup>-1</sup> | 2800 | 3250 |
| Power input                   | W                 | 45   | 39   |
| Current draw                  | A                 | 0.31 | 0.25 |
| Max. back pressure            | Pa                | 80   | 120  |
| Min. ambient temperature      | °C                | -25  | -25  |
| Max. ambient temperature      | °C                | 50   | 70   |
| Starting current              | A                 | 0.45 | 0.40 |

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit  
Subject to alterations


## Technical features

|                                                                    |                                                   |
|--------------------------------------------------------------------|---------------------------------------------------|
| Mass                                                               | 0.9 kg                                            |
| Size                                                               | 130 mm                                            |
| Surface of rotor                                                   | Rotor open, coated in black                       |
| Material of blades                                                 | Sheet steel, coated in black                      |
| Number of blades                                                   | 7                                                 |
| Direction of air flow                                              | "V"                                               |
| Direction of rotation                                              | Counter-clockwise, seen on rotor                  |
| Type of protection                                                 | IP 20                                             |
| Insulation class                                                   | "B"                                               |
| Max. permissible ambient motor temp. (transp./ storage)            | + 80 °C                                           |
| Min. permissible ambient motor temp. (transp./storage)             | - 40 °C                                           |
| Mounting position                                                  | Any                                               |
| Condensate discharge holes                                         | None, open rotor                                  |
| Operation mode                                                     | S1                                                |
| Motor bearing                                                      | Ball bearing                                      |
| Touch current acc. IEC 60990 (measuring network Fig. 4, TN system) | < 0.75 mA                                         |
| Motor protection                                                   | Thermal overload protector (TOP) wired internally |
| Cable exit                                                         | Lateral                                           |
| Protection class                                                   | I (if protective earth is connected by customer)  |
| Product conforming to standard                                     | EN 60335-1; CE                                    |
| Approval                                                           | UL 507; VDE; CSA C22.2 Nr.113                     |

# AC axial fan


straight blades (A series)

Product drawing

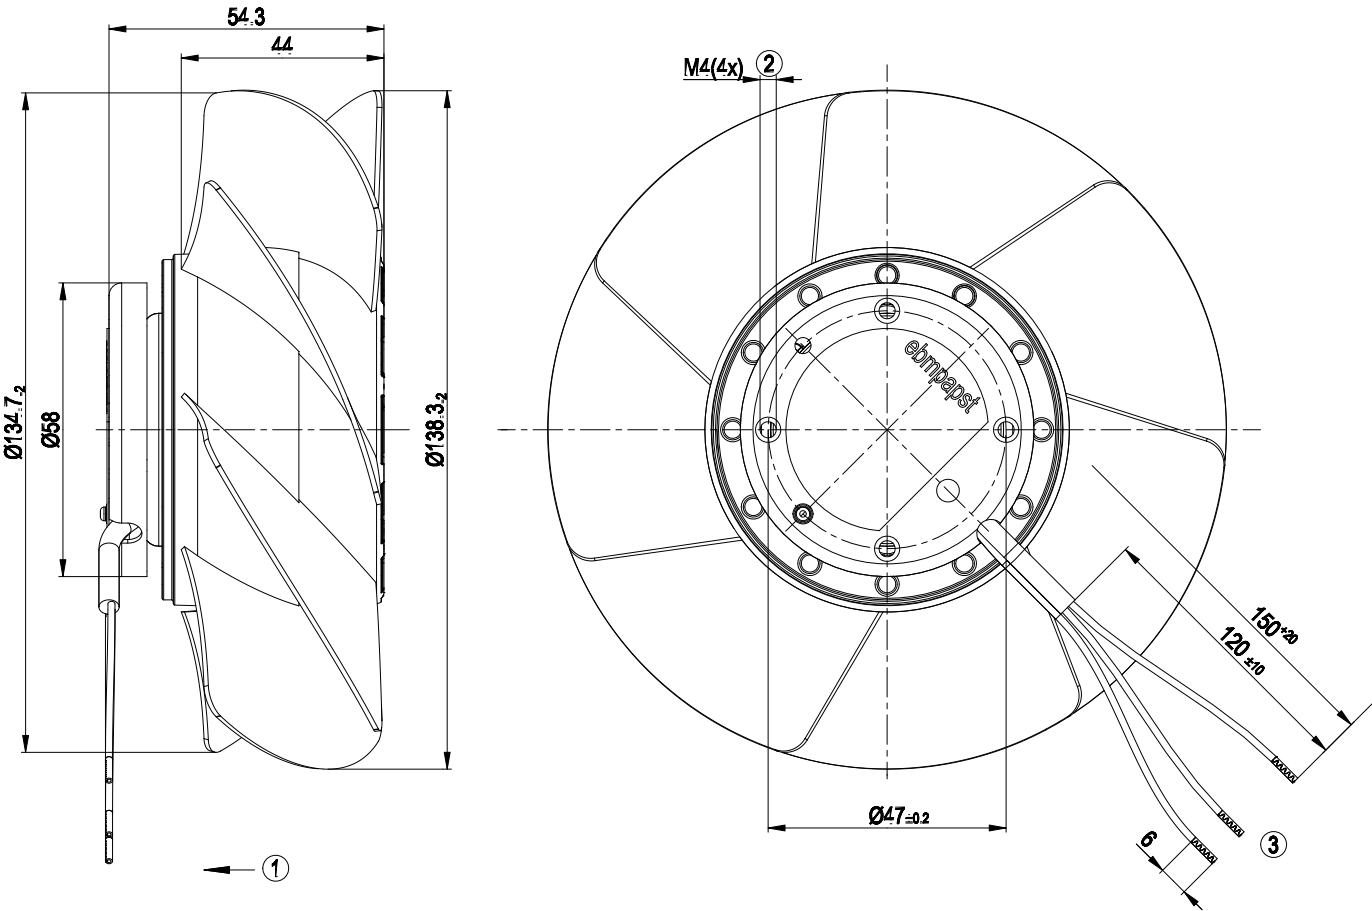


|   |                                                      |
|---|------------------------------------------------------|
| 1 | Direction of air flow "V"                            |
| 2 | Depth of screw max. 4 mm                             |
| 3 | Connection line 3G AWG20, 3x brass lead tips crimped |

Connection screen

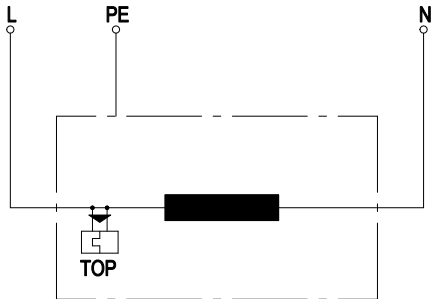

|     |                            |
|-----|----------------------------|
| L   | black                      |
| N   | black                      |
| PE  | green/yellow               |
| TOP | Thermal overload protector |

**Charts: Air flow 50 Hz**

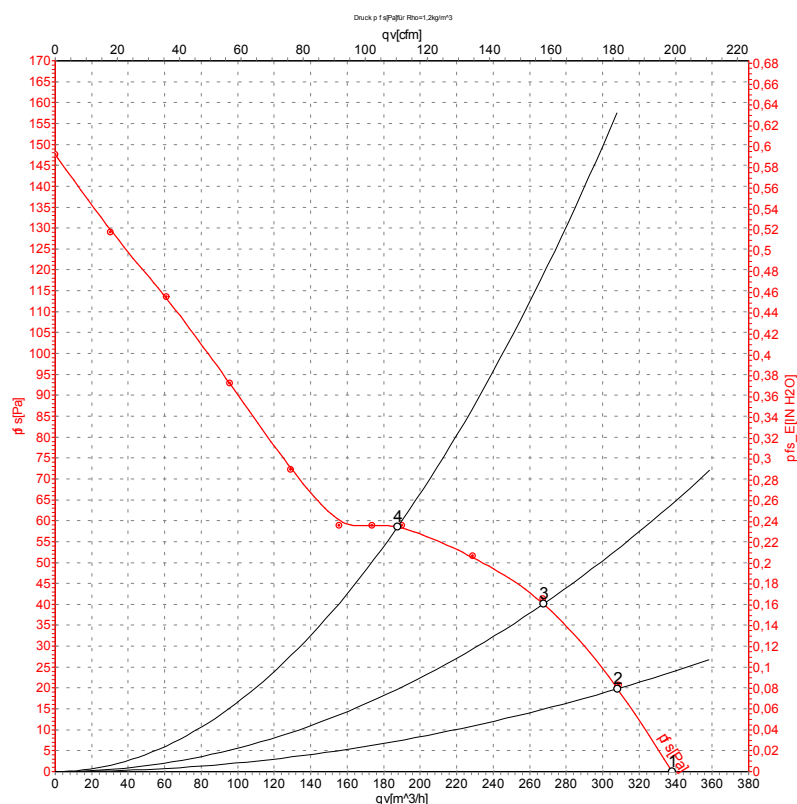

Measurement: LU-58475


Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: L<sub>WA</sub> measured as per ISO 13347 / L<sub>pA</sub> measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

## Measured values

|   | U   | f  | n                 | P <sub>e</sub> | I    | qv                | p <sub>fs</sub> |
|---|-----|----|-------------------|----------------|------|-------------------|-----------------|
|   | V   | Hz | min <sup>-1</sup> | W              | A    | m <sup>3</sup> /h | Pa              |
| 1 | 230 | 50 | 2800              | 45             | 0.31 | 340               | 0               |
| 2 | 230 | 50 | 2795              | 45             | 0.31 | 310               | 20              |
| 3 | 230 | 50 | 2780              | 46             | 0.31 | 270               | 40              |
| 4 | 230 | 50 | 2780              | 46             | 0.31 | 190               | 59              |

U = Supply voltage · f = Frequency · n = Speed ·  $P_{\text{e}}$  = Power input · I = Current draw · qv = Air flow ·  $p_{\text{is}}$  = Pressure increase

**Charts: Air flow 60 Hz**

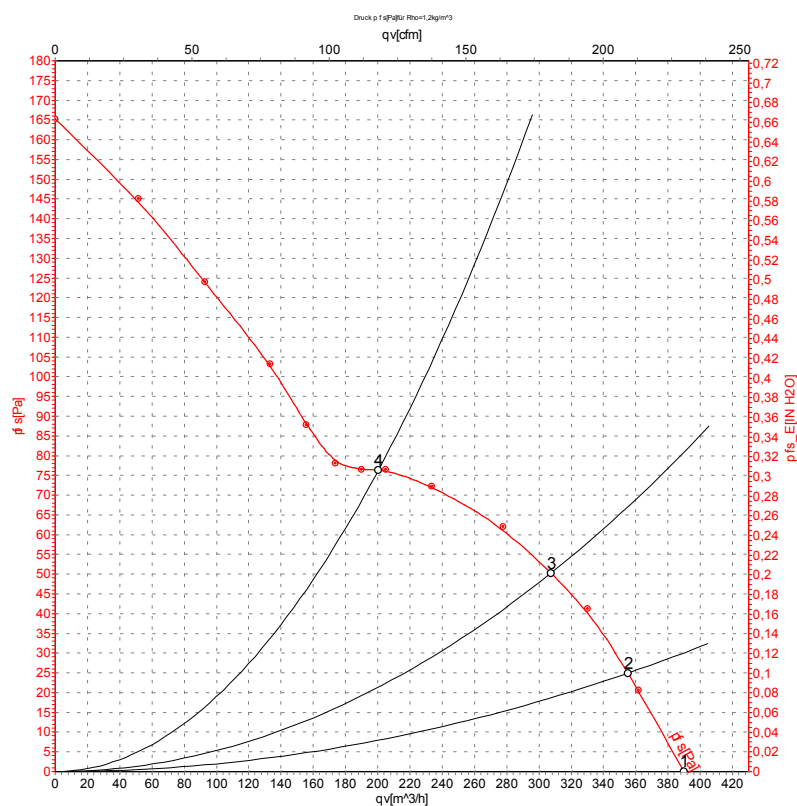

Measurement: LU-58476

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: L<sub>WA</sub> measured as per ISO 13347 / L<sub>pA</sub> measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

## Measured values

|   | U   | f  | n                 | P <sub>e</sub> | I    | qv                | p <sub>fs</sub> |
|---|-----|----|-------------------|----------------|------|-------------------|-----------------|
|   | V   | Hz | min <sup>-1</sup> | W              | A    | m <sup>3</sup> /h | Pa              |
| 1 | 230 | 60 | 3250              | 39             | 0.25 | 390               | 0               |
| 2 | 230 | 60 | 3200              | 42             | 0.25 | 355               | 25              |
| 3 | 230 | 60 | 3165              | 43             | 0.26 | 305               | 50              |
| 4 | 230 | 60 | 3170              | 43             | 0.26 | 200               | 75              |

U = Supply voltage · f = Frequency · n = Speed ·  $P_{\text{e}}$  = Power input · I = Current draw · qv = Air flow ·  $p_{\text{is}}$  = Pressure increase