

Commercial range


Packages



- Applicable for commercial boilers up to 2 MW
- Configurable input/output functions
- Multiple heat demand options (on/off, OpenTherm, 0-10V)
- Internal/external spark igniter or hot-surface igniter
- Primary safeguard functions
- Extra safety- and smart control functions

	Power supply	Dimensions control	Cascade operation	Touch screen	User interface	AL-BUS	Modbus	Ethernet	Diagnostics software	Smart app
	V AC	mm								
Packages										
Commercial Plus	120/230	212×152×49	8 boilers × 8 modules	Y	900PB Display	Y	Y	Y	Y	Y
Commercial	120/230	212×152×49	max. 16 boilers	N	900PB Display	Y	Y	optional	Y	Y
Residential Plus	120/230	212×152×49	settings only	N	900LB Display	Y	N	N	Y	Y

Commercial Plus with integrated cascade control:
Up to 8 boilers × 8 modules (1 managing boiler and max. 7 dependent boilers).

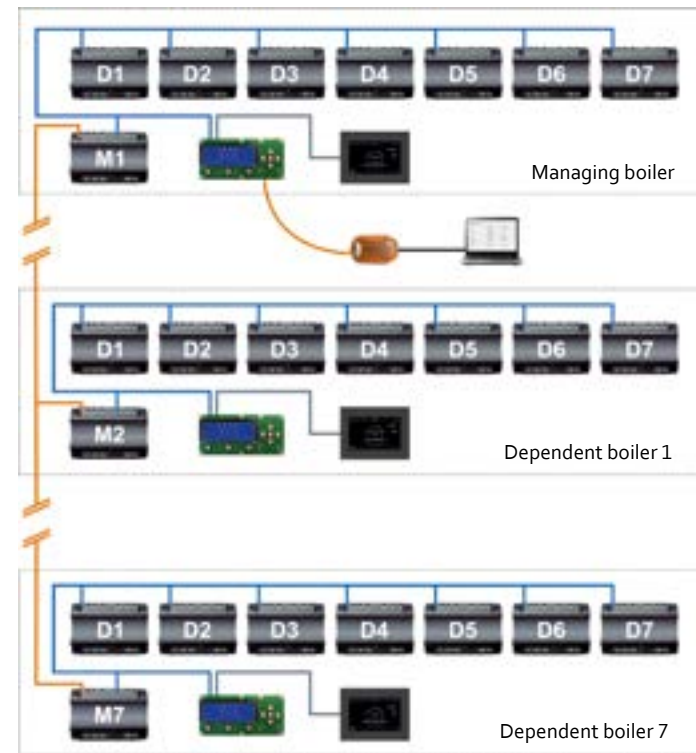

Managing boiler: M1, M2, etc.
Dependent boiler: D1, D7, etc.



900PB Display



900TS Touchscreen