

D3G160-BD05-02

EC centrifugal fan

forward curved, dual inlet
with housing (flange)

ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.ebmpapst.com

www.ebmpapst.com

Limited partnership · Headquarters Mulfingen

County court Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

County court Stuttgart · HRB 590142

Nominal data

Type	D3G160-BD05-02	
Motor	M3G074-DF	
Phase		1~
Nominal voltage	VAC	230
Frequency	Hz	50/60
Type of data definition		ml
State		prelim.
Speed (rpm)	min ⁻¹	2240
Power input	W	430
Current draw	A	2.0
Min. back pressure	Pa	250
Max. ambient temperature	°C	50

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations

Data in accordance with ecodesign regulation EU 327/2011

		Actual	Request 2015
01 Overall efficiency η_{es}	%	43.5	35.4
02 Measurement category		A	
03 Efficiency category		Static	
04 Efficiency grade N		52.1	44
05 Variable speed drive		Yes	

Data definition with optimum efficiency.
The ErP data is determined using a motor-impeller combination in a standardised measurement configuration.

09 Power input P_{ed}	kW	0.43
09 Air flow q_v	m³/h	1060
09 Pressure increase p_{fs}	Pa	582
10 Speed (rpm) n	min ⁻¹	2800
11 Specific ratio*		1.01

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

LU-170229

D3G160-BD05-02

EC centrifugal fan

forward curved, dual inlet

with housing (flange)


Technical features

Mass	6.5 kg
Size	160 mm
Motor size	74
Surface of rotor	Galvanised
Material of impeller	Sheet steel, galvanised
Housing material	Sheet steel, galvanised
Motor suspension	Motor anti-vibration mounted on one side via brackets
Direction of rotation	Counter-clockwise, seen on rotor
Type of protection	IP54
Insulation class	"F"
Humidity (F) / environmental protection class (H)	H0 - dry environment
Max. permissible ambient motor temp. (transp./ storage)	+80 °C
Min. permissible ambient motor temp. (transp./storage)	-40 °C
Mounting position	Any
Condensation drainage holes	None
Operation mode	S1
Motor bearing	Ball bearing
Technical features	- Output 10 VDC, max. 10 mA - Operation and alarm display - Fault output (open collector) - Alarm relay - Integrated PID controller - Output limit - Motor current limit - PFC, active - RS485 MODBUS RTU - Soft start - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Over-temperature protected electronics / motor - Line undervoltage / phase failure detection
Motor protection	Thermal overload protector (TOP) wired internally
Cable exit	Axial
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	CE

EC centrifugal fan

forward curved, dual inlet
with housing (flange)

Product drawing

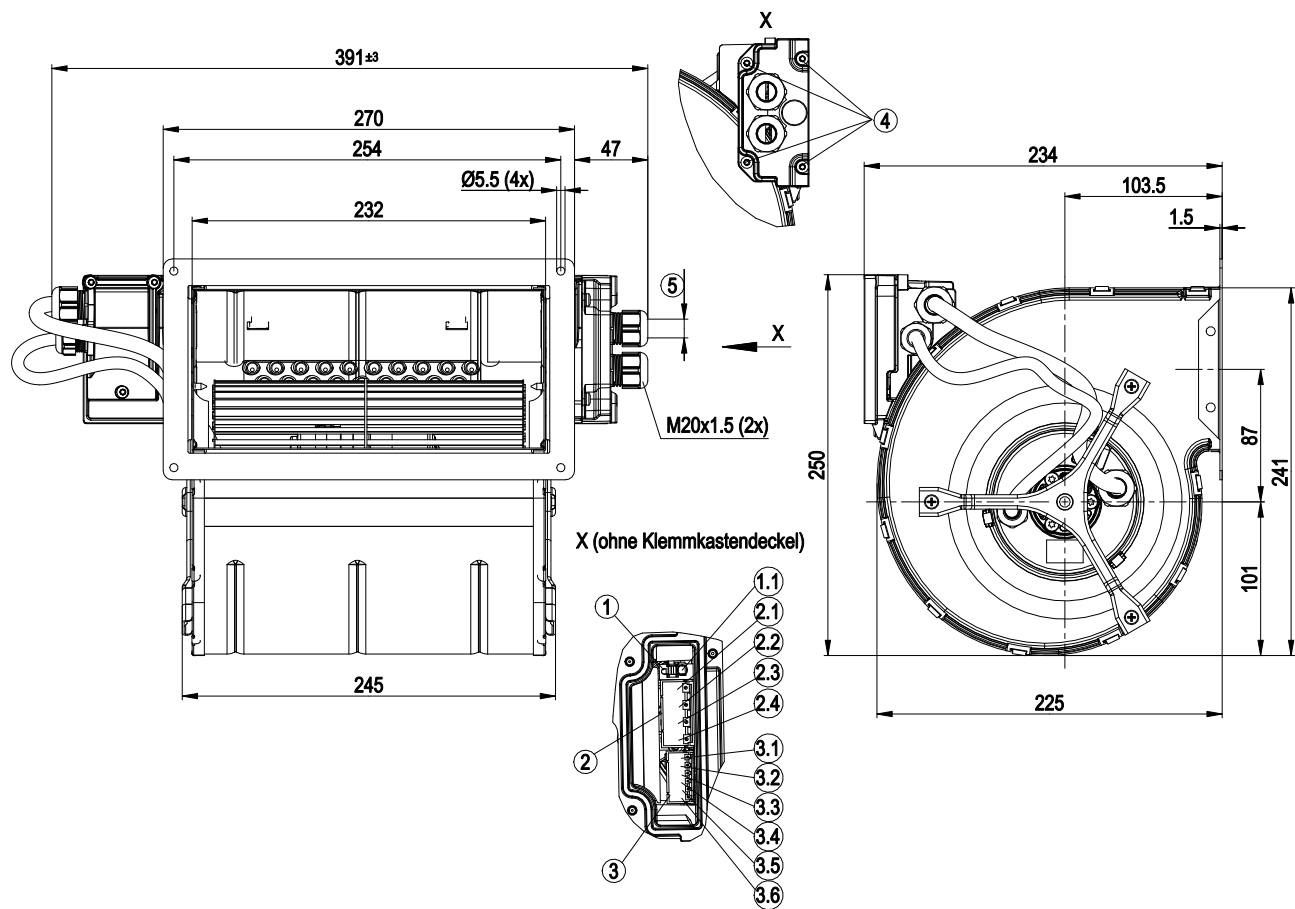


1	Terminal 1
1.1	PE
2	Terminal 2
2.1	L
2.2	N
2.3	NC
2.4	COM
3	Terminal 3
3.1	0-10 V
3.2	+10 V
3.3	GND
3.4	RSA
3.5	RSB
3.6	Tach
4	Tightening torque 3±0.5 Nm
5	Cable diameter min. 8 mm, max. 12 mm, tightening torque 1.8±0.3 Nm

EC centrifugal fan

forward curved, dual inlet

with housing (flange)

Connection screen

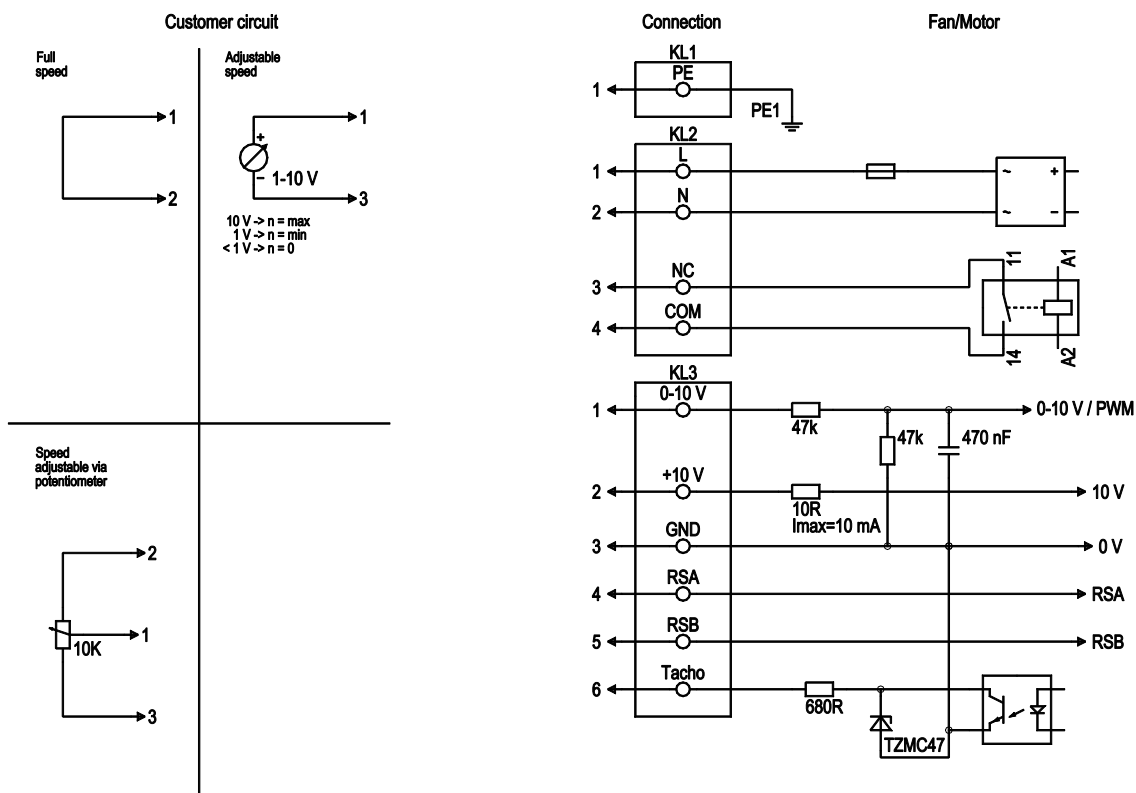


No.	Conn.	Designation	Function / assignment
KL1	1	PE	Protective earth
KL2	2	L	Power supply, phase, 50/60 Hz
KL2	3	N	Power supply, neutral conductor, 50/60 Hz
KL2	4	NC	Status relay, floating status contact, break for failure, contact rating 250 VAC / 2 A (AC1) min. 10 mA, basic insulation on mains side and reinforced insulation on control interface side
KL2	5	COM	Status relay, floating status contact, common connection, contact rating 250 VAC / 2 A (AC1) / min. 10 mA, basic insulation on mains side and reinforced insulation on control interface side
KL3	1	0-10 V	Analogue input (set value), 0-10 V, Ri=100 kΩ, parametrisable curve, SELV
KL3	2	+10 V	Fixed voltage output 10 VDC, SELV
KL3	3	GND	Signal ground for control interface, SELV
KL3	4	RSA	RS-485 interface for MODBUS, RSA; SELV
KL3	5	RSB	RS-485 interface for MODBUS, RSB; SELV
KL3	6	Tacho	Speed monitoring output, open collector, 1 pulse per revolution, Isink max = 10 mA, SELV

EC centrifugal fan

forward curved, dual inlet
with housing (flange)

Charts: Air flow 50 Hz

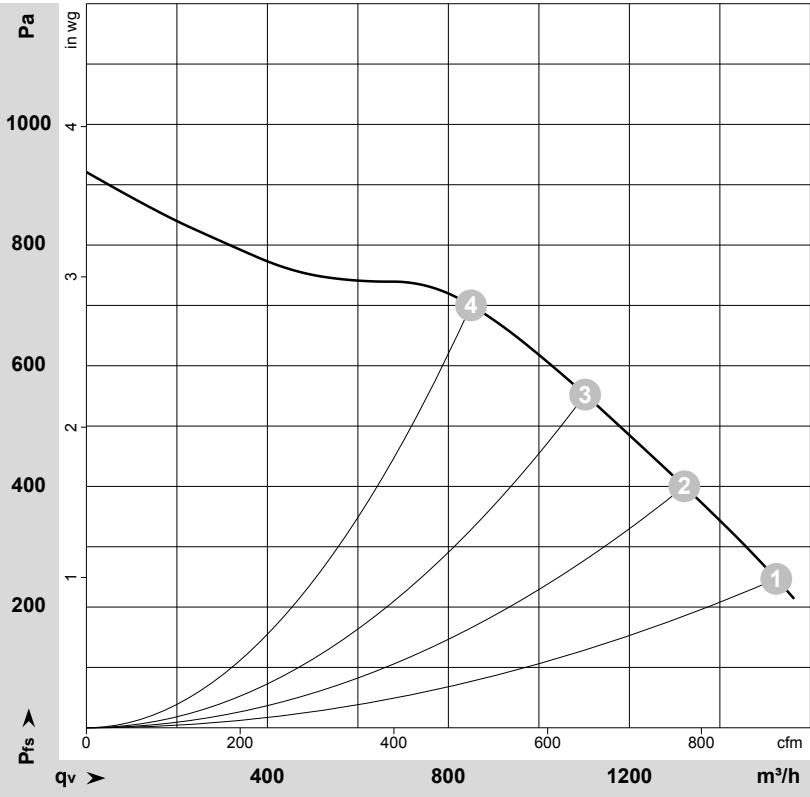

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-170229-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	U	f	n	P _{ed}	I	q _v	p _{fs}	q _v	p _{fs}
	V	Hz	min ⁻¹	W	A	m ³ /h	Pa	cfm	in. wg
1	230	50	2240	430	2.00	1525	250	900	1.00
2	230	50	2465	430	2.00	1320	400	780	1.61
3	230	50	2745	430	2.00	1100	550	650	2.21
4	230	50	3030	430	2.00	850	700	500	2.81

U = Supply voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power input · I = Current draw · q_v = Air flow · p_{fs} = Pressure increase