

G3G 250



- **Material:** Housing: Aluminum
Impeller: Plastic
Motor protection cap: Plastic
- **For potential mounting positions, page 15**
- **Mains connector X, interface connector W and interface see page 27 ff.**


G3G 250 MW






- **Material:** Housing: Die-cast aluminum
Impeller: Sheet aluminum
Rotor: Coated in black
Electronics enclosure: Die-cast aluminum
- **For mains connector see operating instructions**

Nominal data												Part number	Nominal data											
Type	Curve	Rated voltage	Frequency	Max. air flow	Max. air flow	Max. pressure increase	Max. pressure increase	Max. input power	Max. speed	Perm. amb. motor temp.	Perm. temp. of medium		Type	Rated voltage	Frequency	Max. air flow	Max. air flow	Max. pressure increase	Max. pressure increase	Max. input power	Max. speed	Perm. amb. motor temp.	Perm. temp. of medium	Part number
G3G 250 -GN17-01	①	230	50/60	1,735	1,022	3,300	13.2	1,150	5,200	60	60	55600.05021	G3G 250 -MW50-01	380-480	50/60	2,200	1,296	5,400	21.6	2,500	6,400	50	50	G3G 250 -MW50-01
G3G 250 -GN39-01	②	115	50/60	1,780	1,048	3,400	13.6	1,200	5,200	60	60	55600.05051	Subject to change.											
Subject to change.										Dimensions in mm.														

Dimensions in mm. Drawing valid for part number 55600.05021.

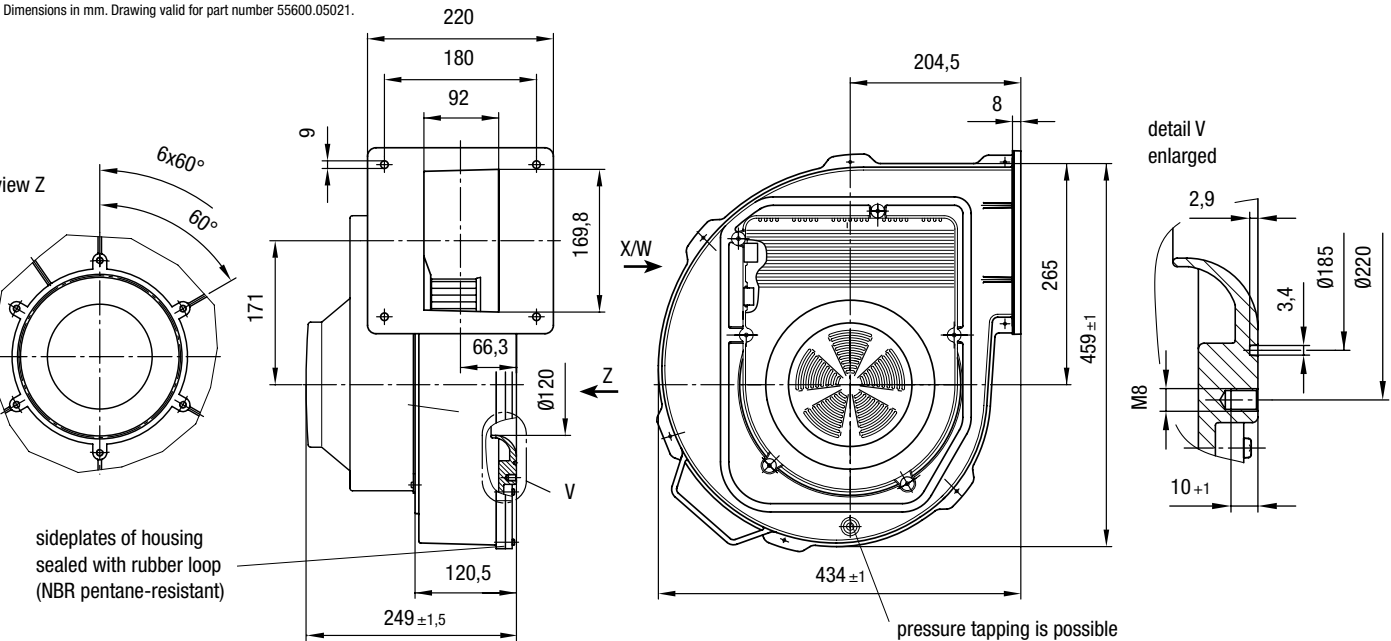

Curves

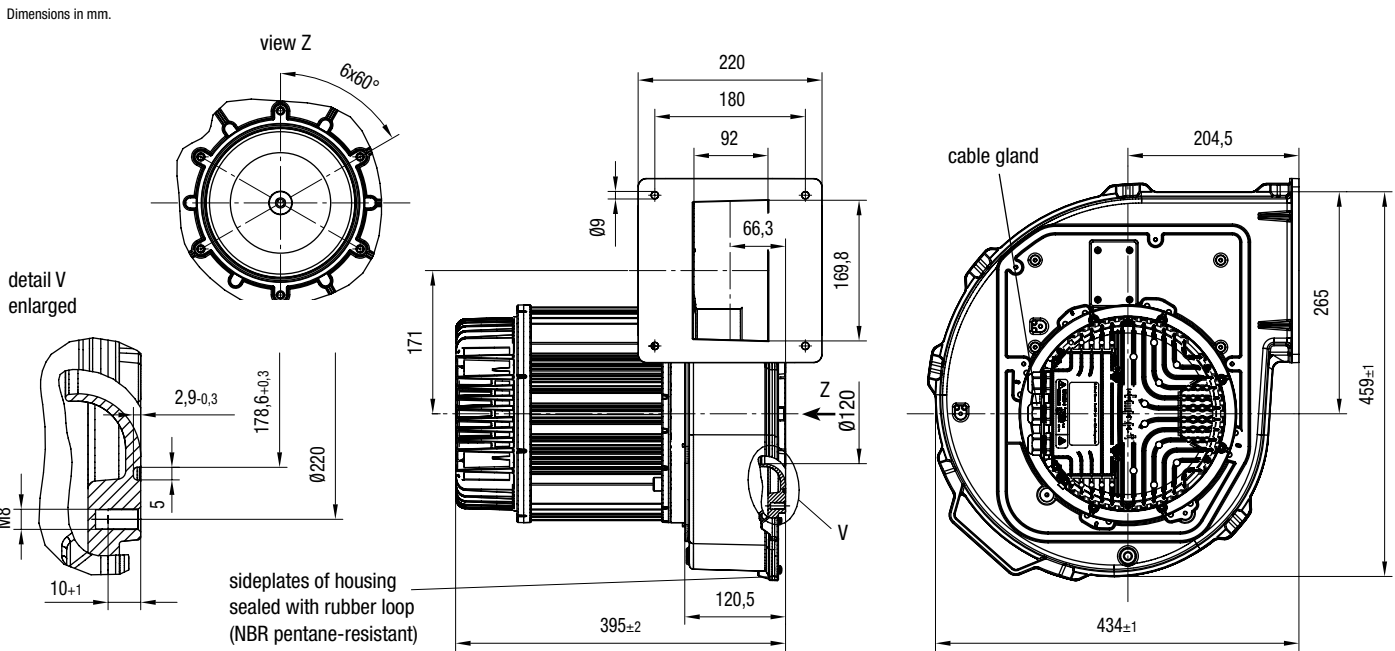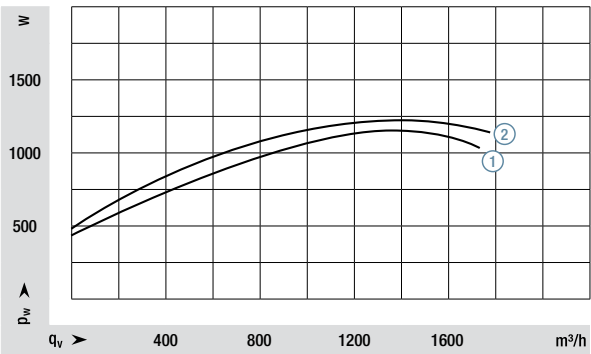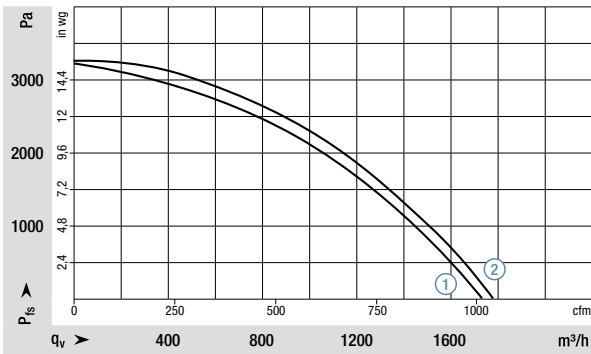

Curves

