

**K3G097-AP46-01**

## EC centrifugal fan combination

forward-curved, dual-intake

with housing, Automotive

**ebm-papst Mulfingen GmbH & Co. KG**

Bachmühle 2 · D-74673 Muldingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.ebmpapst.com

[www.ebmpapst.com](http://www.ebmpapst.com)

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

## Nominal data

|                          |                       |          |
|--------------------------|-----------------------|----------|
| <b>Type</b>              | <b>K3G097-AP46-01</b> |          |
| <b>Motor</b>             | <b>M3G084-BF</b>      |          |
| Nominal voltage          | VDC                   | 26       |
| Nominal voltage range    | VDC                   | 16 .. 32 |
| Method of obtaining data |                       | fa       |
| Status                   |                       | prelim.  |
| Speed (rpm)              | min <sup>-1</sup>     | 3500     |
| Power consumption        | W                     | 320      |
| Current draw             | A                     | 12.2     |
| Min. back pressure       | Pa                    | 0        |
| Min. back pressure       | in. wg                | 0        |
| Min. ambient temperature | °C                    | -40      |
| Max. ambient temperature | °C                    | 85       |

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment

Subject to change

### Data according to Commission Regulation (EU) 327/2011

|                                   |   |        |           |
|-----------------------------------|---|--------|-----------|
|                                   |   | Actual | Req. 2015 |
| 01 Overall efficiency $\eta_{es}$ | % | 49.4   | 33.1      |
| 02 Measurement category           |   | A      |           |
| 03 Efficiency category            |   | Static |           |
| 04 Efficiency grade N             |   | 60.3   | 44        |
| 05 Variable speed drive           |   | Yes    |           |

Data obtained at optimum efficiency level.

The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

|                               |                   |      |
|-------------------------------|-------------------|------|
| 09 Power consumption $P_e$    | kW                | 0.18 |
| 09 Air flow $q_v$             | m <sup>3</sup> /h | 500  |
| 09 Pressure increase $p_{is}$ | Pa                | 592  |
| 10 Speed (rpm) $n$            | min <sup>-1</sup> | 4600 |
| 11 Specific ratio*            |                   | 1.01 |

\* Specific ratio =  $1 + p_{fs} / 100\,000 \text{ Pa}$

LU-201080

**K3G097-AP46-01**

## EC centrifugal fan combination

forward-curved, dual-intake

with housing, Automotive


## Technical description

|                                                            |                                                                                                                                                                                                                                                                                                                                                              |
|------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Weight                                                     | 2 kg                                                                                                                                                                                                                                                                                                                                                         |
| Size                                                       | 97 mm                                                                                                                                                                                                                                                                                                                                                        |
| Motor size                                                 | 84                                                                                                                                                                                                                                                                                                                                                           |
| Impeller material                                          | PA plastic                                                                                                                                                                                                                                                                                                                                                   |
| Housing material                                           | PP plastic                                                                                                                                                                                                                                                                                                                                                   |
| Balancing grade according to DIN ISO 1940-1                | G 2.5                                                                                                                                                                                                                                                                                                                                                        |
| Direction of rotation                                      | Clockwise, viewed toward rotor                                                                                                                                                                                                                                                                                                                               |
| Degree of protection                                       | Motor IP24 KM, electronics IP6K9K (mating connector installed)                                                                                                                                                                                                                                                                                               |
| Insulation class                                           | "B"                                                                                                                                                                                                                                                                                                                                                          |
| Moisture (F) / Environmental (H) protection class          | H4                                                                                                                                                                                                                                                                                                                                                           |
| Ambient temperature note                                   | Over +75°C with power derating                                                                                                                                                                                                                                                                                                                               |
| Max. permitted ambient temp. for motor (transport/storage) | +85 °C                                                                                                                                                                                                                                                                                                                                                       |
| Min. permitted ambient temp. for motor (transport/storage) | -40 °C                                                                                                                                                                                                                                                                                                                                                       |
| Installation position                                      | Any                                                                                                                                                                                                                                                                                                                                                          |
| Condensation drainage holes                                | None, open rotor                                                                                                                                                                                                                                                                                                                                             |
| Mode                                                       | S1                                                                                                                                                                                                                                                                                                                                                           |
| Motor bearing                                              | Ball bearing; (sealed)                                                                                                                                                                                                                                                                                                                                       |
| Life expectancy                                            | 40,000 h (typical)                                                                                                                                                                                                                                                                                                                                           |
| Technical features                                         | <ul style="list-style-type: none"><li>- Fault output (open collector)</li><li>- Power limiter</li><li>- Load dump (58 V)</li><li>- Motor current limitation</li><li>- Soft start</li><li>- Control input 0-10 VDC / PWM</li><li>- Temperature derating</li><li>- Thermal overload protection for electronics</li><li>- Reverse polarity protection</li></ul> |
| Electrical hookup                                          | Plug; Standby current less than 500 µA                                                                                                                                                                                                                                                                                                                       |
| Approval                                                   | EAC                                                                                                                                                                                                                                                                                                                                                          |

# EC centrifugal fan combination


forward-curved, dual-intake  
with housing, Automotive

## Product drawing

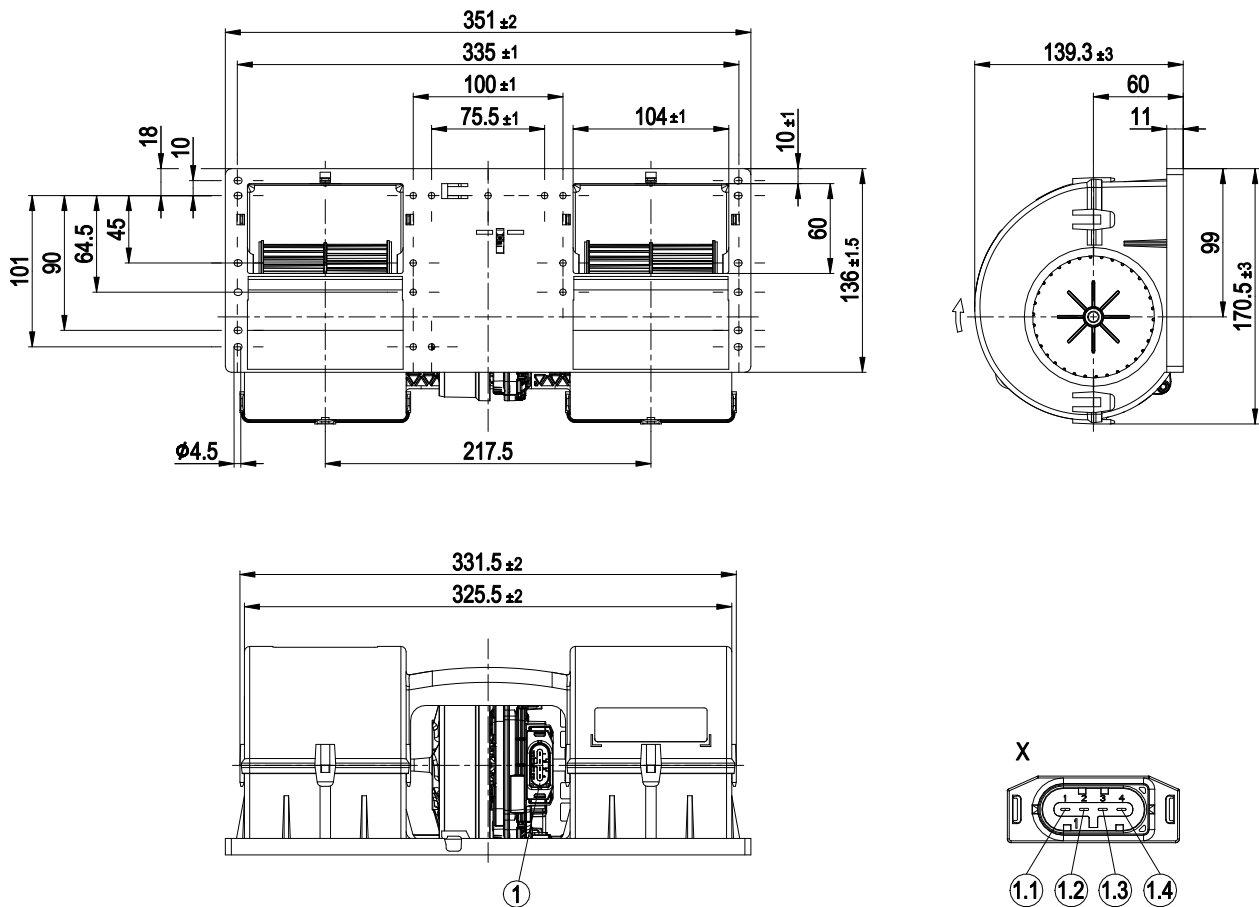

|                                                                                                                                                                                                                                                                    |                                                    |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------|
| 1                                                                                                                                                                                                                                                                  | 4-pole plug, pluggable with cable from accessories |
| 1.1                                                                                                                                                                                                                                                                | Diagnostic output                                  |
| 1.2                                                                                                                                                                                                                                                                | PWM/LIN                                            |
| 1.3                                                                                                                                                                                                                                                                | + UB                                               |
| 1.4                                                                                                                                                                                                                                                                | GND                                                |
| Accessory part: Cable (460 mm) with mating connector, part no. 02040-4-1021 not included in scope of delivery<br>4-pole mating connector TE 1-1718628-1, 2x plug contact TE 1-968857-1, 2x plug contact TE 1-968855-1,<br>2x seal TE 828905-1, 2x seal TE 828904-1 |                                                    |

## Connection diagram

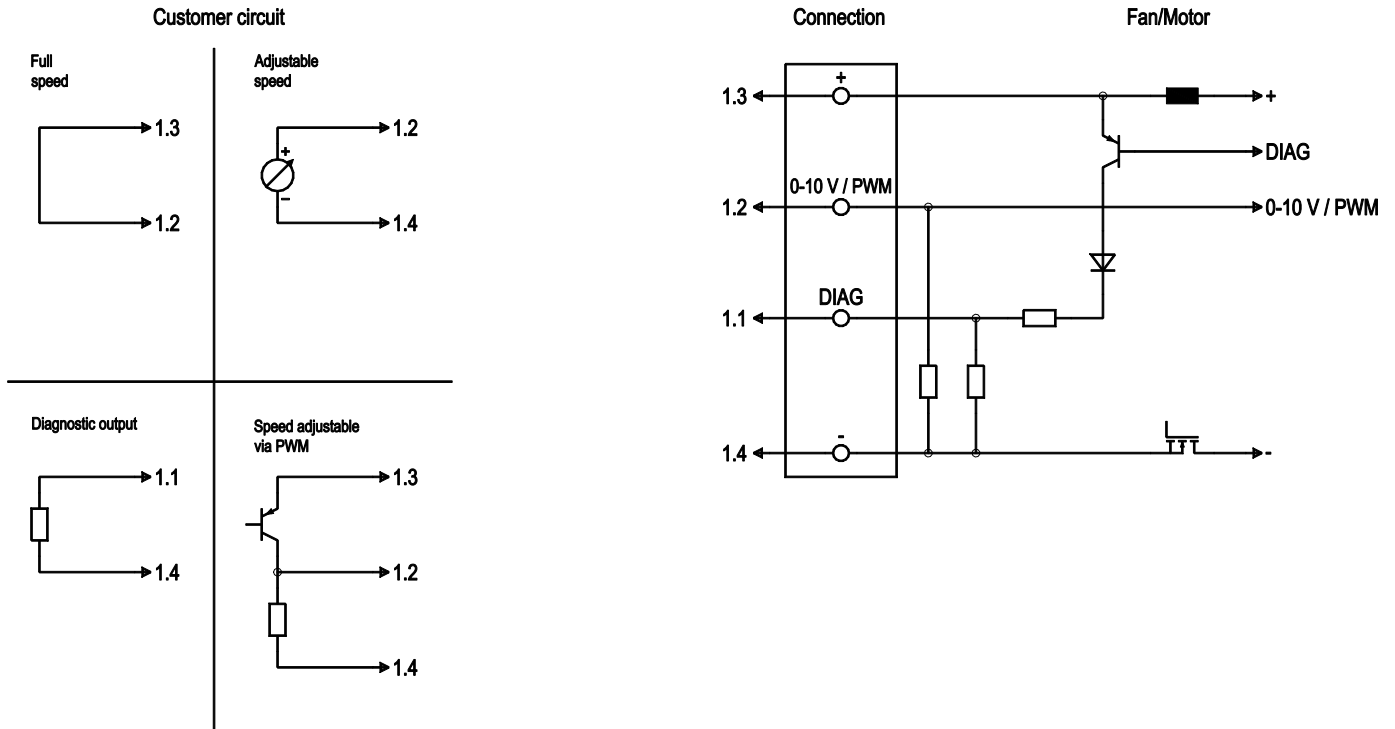


| No. | Conn. | Designation  | Function/assignment                                                                                                                                                                               |
|-----|-------|--------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|     | 1.3   | +            | Power supply +                                                                                                                                                                                    |
|     | 1.4   | -            | Power supply -                                                                                                                                                                                    |
|     | 1.2   | 0-10 V / PWM | Control input: Ri > 27 kΩ<br>0-10 V: (typ. 0.5 V -> Standby; 1.5 V -> n = min.; 9.5 V -> n = max.)<br>or PWM: (12 V - Ub; 1 kHz - 10 kHz; typ. < 1% -> standby; 10% -> n = min.; 95% -> n = max.) |
|     | 1.1   | DIAG         | Diagnostic output: Open Collector, Isource max = 10 mA, Rsource = 2 kΩ; Rsink = 100 kΩ<br>fan OK -> low; fan error -> high                                                                        |

# EC centrifugal fan combination

forward-curved, dual-intake  
with housing, Automotive

## Curves: Air performance

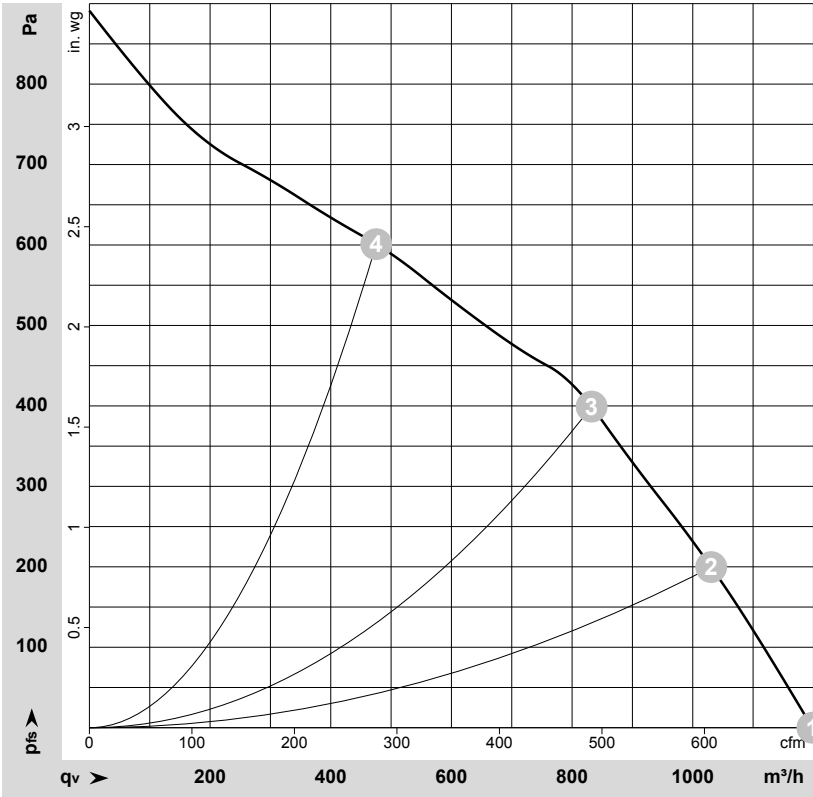

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-201080-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

|   | U  | n                 | P <sub>ed</sub> | I     | LpA <sub>in</sub> | LwA <sub>in</sub> | q <sub>v</sub>    | p <sub>fs</sub> | q <sub>v</sub> | p <sub>fs</sub> |
|---|----|-------------------|-----------------|-------|-------------------|-------------------|-------------------|-----------------|----------------|-----------------|
|   | V  | min <sup>-1</sup> | W               | A     | dB(A)             | dB(A)             | m <sup>3</sup> /h | Pa              | cfm            | in. wg          |
| 1 | 26 | 3500              | 320             | 12.20 | 70                | 81                | 1200              | 0               | 705            | 0.00            |
| 2 | 26 | 3780              | 284             | 10.90 | 68                | 78                | 1030              | 200             | 605            | 0.80            |
| 3 | 26 | 4100              | 246             | 9.43  | 66                | 77                | 830               | 400             | 490            | 1.61            |
| 4 | 26 | 4630              | 183             | 7.03  | 67                | 77                | 475               | 600             | 280            | 2.41            |

U = Voltage · n = Speed (rpm) · P<sub>ed</sub> = Power consumption · I = Current draw · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side · q<sub>v</sub> = Air flow  
p<sub>fs</sub> = Pressure increase

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ebm-papst:](#)

[K3G097-AP46-01](#)