

# Cables


- Cable with molded plug connection in varying lengths.
- Wire end with wire end ferrules, crimped ferrules, or tin-plated.
- Straight or angled plug.
- For all fan types with flat plug 2.8 / 3.0 x 0.5.




| Order number | Type            | L1 (mm) | Wires                | Plug | Wire end | Flat push-on receptacle | Application |
|--------------|-----------------|---------|----------------------|------|----------|-------------------------|-------------|
| 9920120000   | <b>LZ120</b>    | 610     | 0.5 mm <sup>2</sup>  | G    | C        | 2.8 x 0.5               | AC          |
| 9920120004   | <b>LZ120-4</b>  | 2 000   | 0.5 mm <sup>2</sup>  | G    | A        | 2.8 x 0.5               | AC          |
| 9920120005   | <b>LZ120-5</b>  | 380     | 0.5 mm <sup>2</sup>  | W    | B        | 2.8 x 0.5               | DC          |
| 9920120006   | <b>LZ120-6</b>  | 610     | 0.5 mm <sup>2</sup>  | W    | B        | 2.8 x 0.5               | DC          |
| 9920120010   | <b>LZ120-10</b> | 2 500   | 0.5 mm <sup>2</sup>  | G    | B        | 2.8 x 0.5               | AC          |
| 9920120011   | <b>LZ120-11</b> | 2 000   | 0.5 mm <sup>2</sup>  | G    | A        | 2.8 x 0.5               | DC          |
| 9920120013   | <b>LZ120-13</b> | 5 000   | 0.5 mm <sup>2</sup>  | G    | B        | 2.8 x 0.5               | AC          |
| 9920120016   | <b>LZ120-16</b> | 800     | 0.5 mm <sup>2</sup>  | G    | B        | 2.8 x 0.5               | AC          |
| 9920120017   | <b>LZ120-17</b> | 3 000   | 0.5 mm <sup>2</sup>  | G    | A        | 2.8 x 0.5               | AC          |
| 9920120018   | <b>LZ120-18</b> | 4 000   | 0.5 mm <sup>2</sup>  | G    | A        | 2.8 x 0.5               | AC          |
| 9920126000   | <b>LZ126</b>    | 1 000   | 0.5 mm <sup>2</sup>  | G    | C        | 2.8 x 0.5               | AC          |
| 9920127000   | <b>LZ127</b>    | 1 600   | 0.5 mm <sup>2</sup>  | G    | B        | 2.8 x 0.5               | AC          |
| 9920130001   | <b>LZ130-1</b>  | 610     | 0.82 mm <sup>2</sup> | G    | C        | 2.8 x 0.5               | AC *        |
| 9920140000   | <b>LZ140</b>    | 610     | 0.73 mm <sup>2</sup> | G    | B        | 2.8 x 0.8               | AC          |

All measurements are given in mm. \* UL-approved

Cable Straight plug (G)

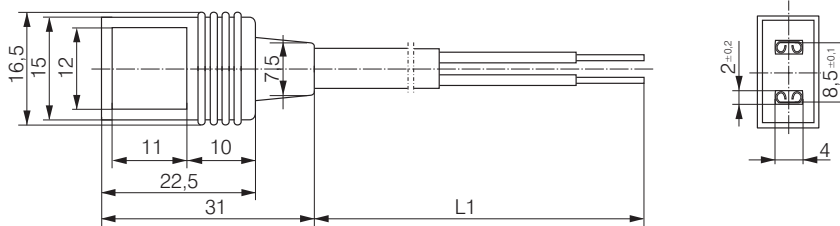


Cable Angled plug (W)

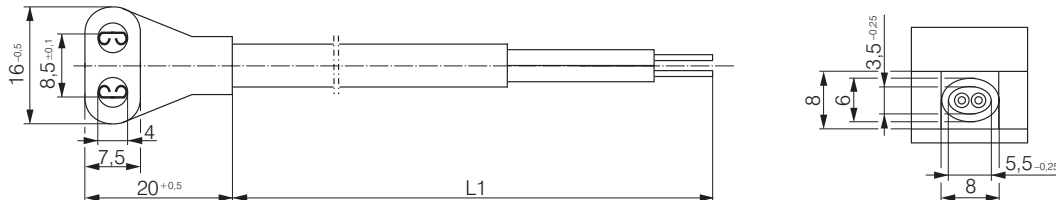


Wire end ferrules

Wire end A



Tin-plated

Wire end B



Wire end ferrules

Wire end C

