


- **Material:** Housing: Aluminum
Impeller: Plastic
Motor protection cap: Plastic
- **For potential mounting positions, page 15**
- **Multi-venturi available**
- **Mains connector X, interface connector W and interface see page 27 ff.**





Nominal data	Curve	Rated voltage	Frequency	Max. air flow	Max. air flow	Max. pressure increase	Max. pressure increase	Max. input power	Max. speed	Perm. amb. motor temp.	Perm. temp. of medium	Part number
	Type	V	Hz	m³/h	cfm	Pa	wg	W	min⁻¹	°C	°C	
NRG 137	①	230	50/60	235	138	3,500	14	190	8,500	60	80	55667.33110
	②	120	60	250	147	3,800	15.2	250	8,500	60	80	55667.33040

Subject to change.

Dimensions in mm. Drawing valid for part number 55667.33110.

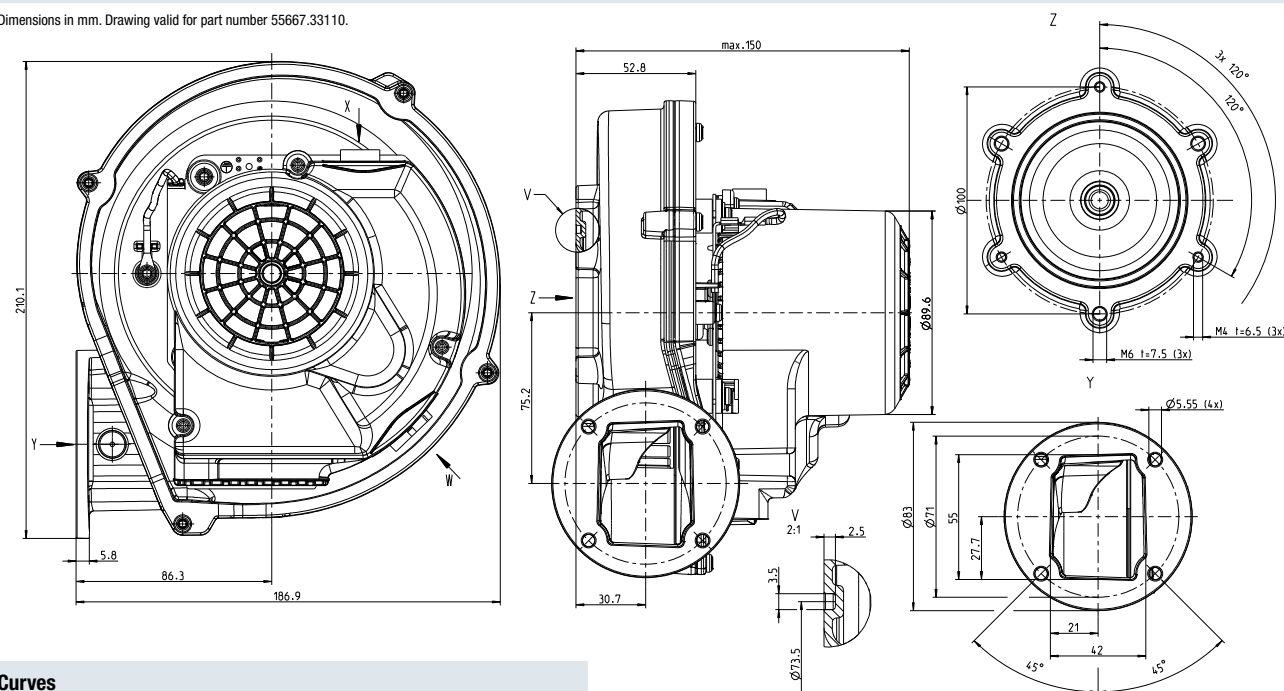

Curves

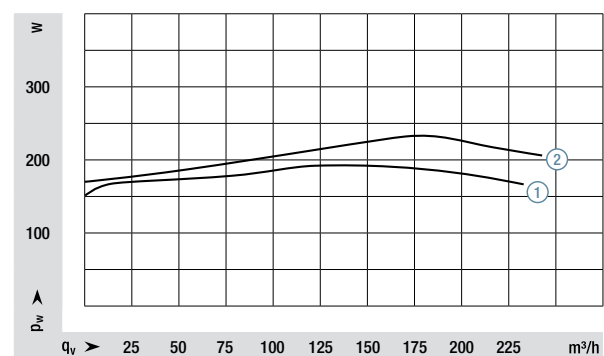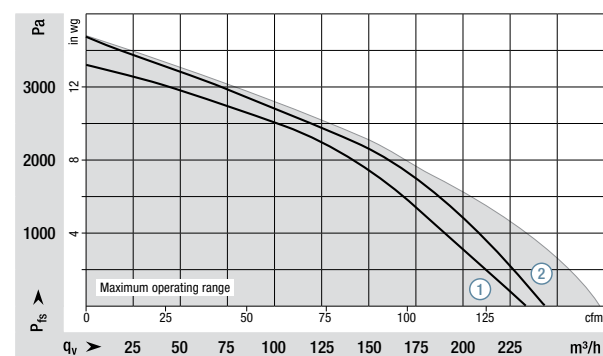


- **Material:** Housing: Aluminum
Impeller: Plastic
Motor protection cap: Plastic
- **For potential mounting positions, page 15**
- **Mains connector X, interface connector W and interface see page 27 ff.**



Nominal data	Curve	Rated voltage	Frequency	Max. air flow	Max. air flow	Max. pressure increase	Max. pressure increase	Max. input power	Max. speed	Perm. amb. motor temp.	Perm. temp. of medium	Part number
Type		V	Hz	m³/h	cfm	Pa	wg	W	min⁻¹	°C	°C	
RG 175	①	230	50/60	390	230	3,700	14.8	300	8,500	60	80	55667.14090
	②	120	60	420	247	4,100	16.4	300	8,500	60	80	55667.14002

Subject to change.

Dimensions in mm. Drawing valid for part number 55667.14090.

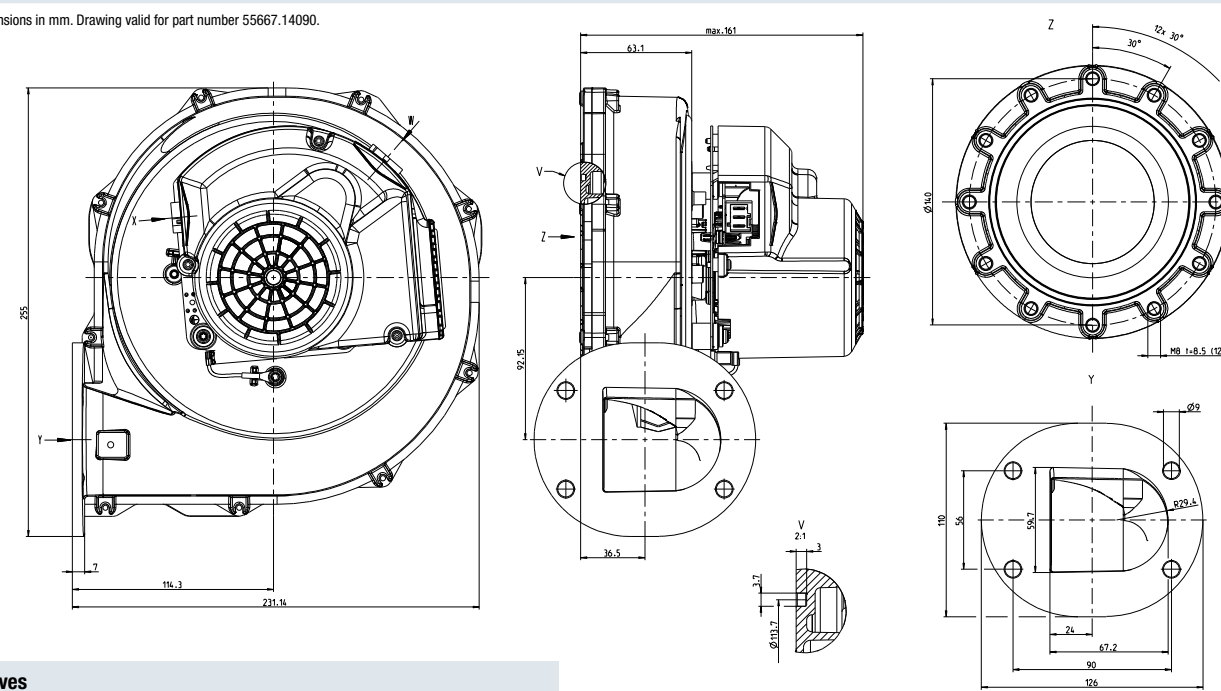

Curves

