

Submersible circulation pumps

P5



Submersible circulation pumps P5 are drain pumps for the conveyance of low-viscosity liquids (water, condensate, alkalines etc.).

Typical applications are, e.g. in condense dryers, condensing boilers, air-conditioning units and tapping systems.

Motor: Shaded pole motor EM30.

Motor above the pump housing.



Special versions with longer pump shaft, other mounting plates etc. on request.

ebm-papst • Landshut

Nominal data

type	rated voltage V	frequency Hz	power input W	rated current mA	flow rate (H 100cm) l/min	mode of operation	insulation class	mass kg
P5-3020	230	50	22	190	3,5	S1	B	0,7

bold print = standard type; subject to alterations

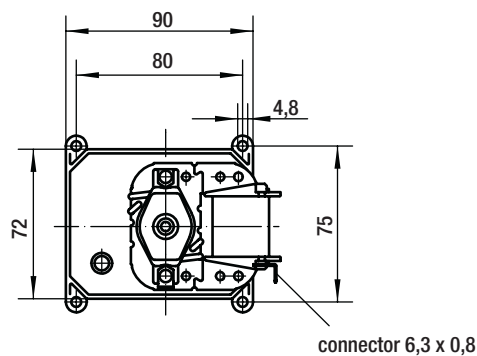

Characteristic curves

