

RG 128




- **Material:** Housing: Aluminum
Impeller: Plastic
Motor protection cap: Plastic
- **For potential mounting positions, page 15**
- **Mains connector X, interface connector W and interface see page 27 ff.**



Nominal data	Curve	Rated voltage	Frequency	Max. air flow	Max. air flow	Max. pressure increase	Max. pressure increase	Max. input power	Max. speed	Perm. amb. motor temp.	Perm. temp. of medium	Part number
Type	V	Hz	m³/h	cfm	Pa	wg	W	min⁻¹	°C	°C		
RG 128	①	230	50/60	150	88	2,550	10.2	120	7,500	60	80	55667.22510
	②	120	60	145	85	2,700	10.8	115	7,500	60	80	55667.11840

Subject to change.

Dimensions in mm. Drawing valid for part number 55667.22510.

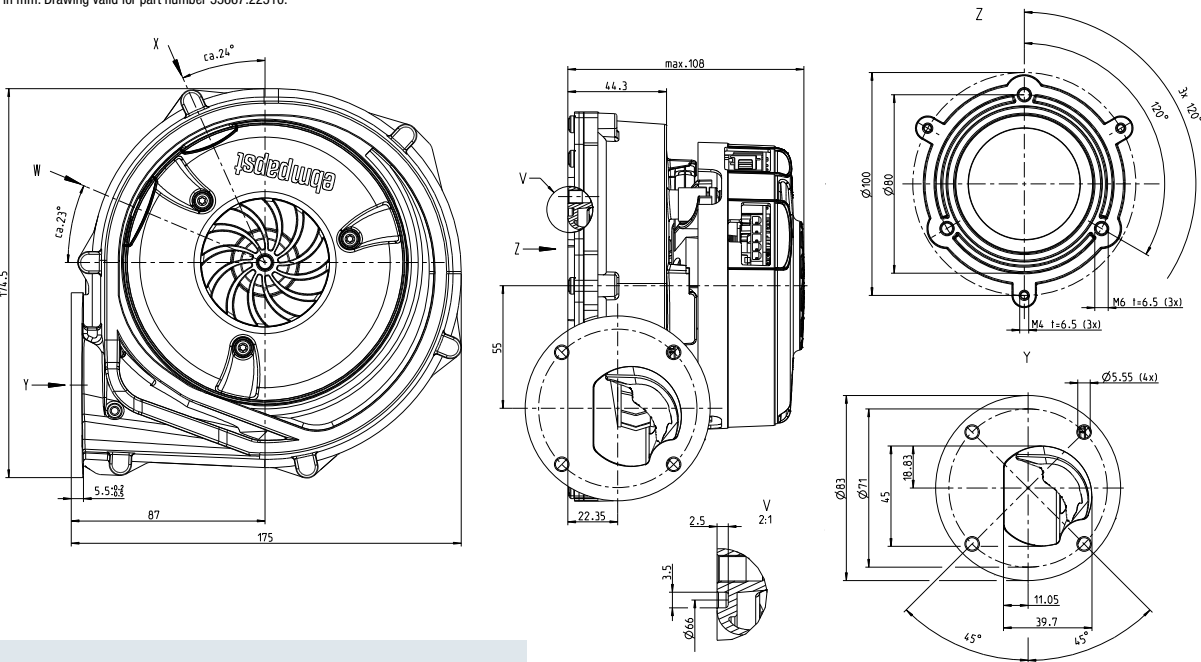

Curves

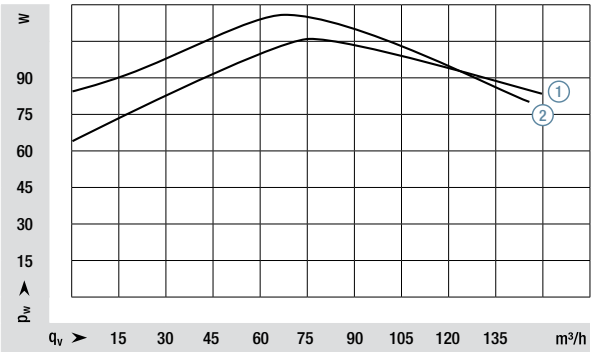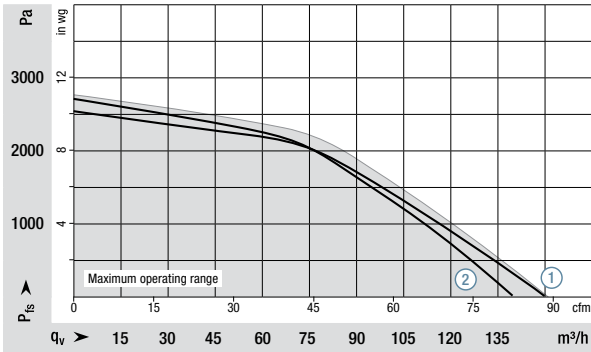

RG 148




- **Material:** Housing: Aluminum
Impeller: Plastic
Motor protection cap: Plastic
- **For potential mounting positions, page 15**
- **Mains connector X, interface connector W and interface see page 27 ff.**

Nominal data	Curve	Rated voltage	Frequency	Max. air flow	Max. air flow	Max. pressure increase	Max. pressure increase	Max. input power	Max. speed	Perm. amb. motor temp.	Perm. temp. of medium	Part number
Type	V	Hz	m³/h	cfm	Pa	wg	W	min⁻¹	°C	°C		
RG 148	①	230	50/60	230	135	4,400	17.6	200	8,500	60	80	55667.25230
	②	120	60	180	106	2,800	11.2	130	8,500	60	8	on request

Subject to change.

Dimensions in mm. Drawing valid for part number 55667.25230.

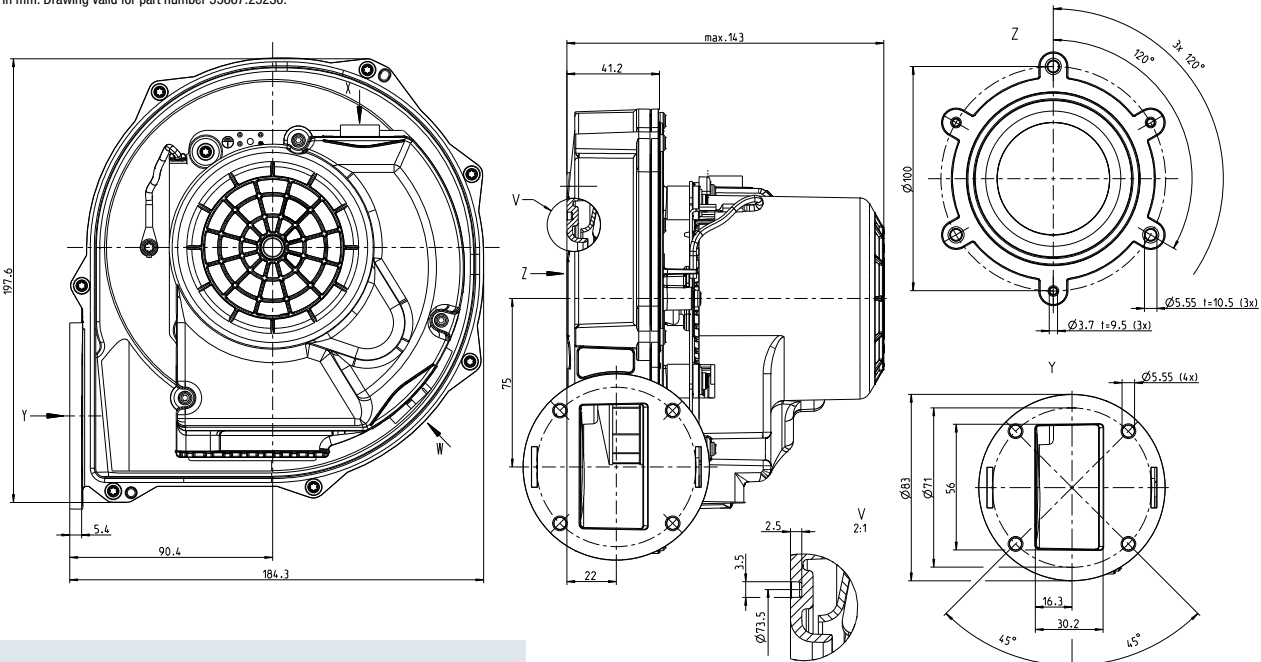

Curves

