


# Radial blowers high temperature version

RLH 108 (120)...LH

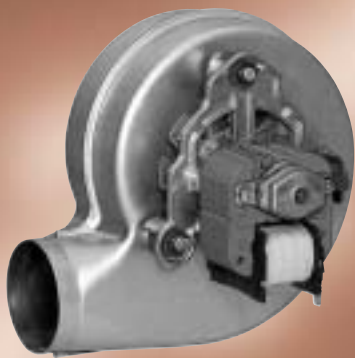

- insulation class H
- max. ambient air stream temperature 250 °C
- housing: FAL sheet steel
- impeller: forward curved, FAL sheet steel
- motor mounting decoupled by silicon elements
- mounting position must be specified for corresponding support elements

ebm-papst • Landshut

Nominal data		characteristic curve	rated voltage	frequency	air flow	max. pressure increase	power input	rated current	speed	mass	Dimensions mm	
motor right*	motor left		V	Hz	m <sup>3</sup> /h	Pa	W	mA	min <sup>-1</sup>	kg	a	c
RLH108/4200-3030LH	RLH108/0042-3030LH	①	230	50	135	315	58	480	1850	1,7	143	42
RLH120/3800-3038LH	RLH120/0038-3038LH	②	230	50	170	420	92	870	2100	2,0	155	38

\*) Corresponding to dimensional drawing; Technical data valid at free air flow with inlet ring; bold print = standard type; subject to alterations

## Characteristic curves

