


Motor-protection switch, single phase and three-phase for wall assembly




- **Technical features:** Input for TOP
- **Type of protection:** IP 55

Nominal data		Nominal voltage					Frequency	Current draw	Mass	
Type	VAC	Hz	A	kg	Auxiliary contactor					
TPD 250-AA01 -01	3~	400	50/60	25.0	0.6	Without auxiliary contactor				
TPD 250-AA01 -02	3~	400	50/60	25.0	0.6	With break contact				
TPD 250-AA01 -03	3~	400	50/60	25.0	0.6	With make contact				
TPE 100-AA01 -01	1~	230	50/60	10.0	0.6	Without auxiliary contactor				
TPE 100-AA01 -02	1~	230	50/60	10.0	0.6	With break contact				
TPE 100-AA01 -03	1~	230	50/60	10.0	0.6	With make contact				

subject to alterations

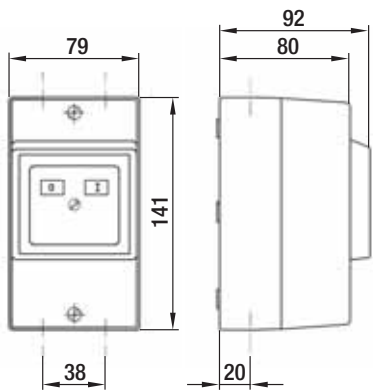

- **Electr. connection, three-phase:**



- **Electr. connection, single-phase:**

