

# Motor protection switch, single-phase


for assembly inside a cabinet

– **Technical features:** Input for TOP



| Nominal data | Nominal voltage  |        | Frequency | Current draw |     | Mass | Auxiliary contactor         |
|--------------|------------------|--------|-----------|--------------|-----|------|-----------------------------|
|              | Type             | VAC    | Hz        | A            | kg  |      |                             |
|              | TPE 100-AB01 -01 | 3~ 230 | 50/60     | 10.0         | 0.3 |      | Without auxiliary contactor |
|              | TPE 100-AB01 -02 | 3~ 230 | 50/60     | 10.0         | 0.3 |      | With break contact          |
|              | TPE 100-AB01 -03 | 3~ 230 | 50/60     | 10.0         | 0.3 |      | With make contact           |

subject to alterations

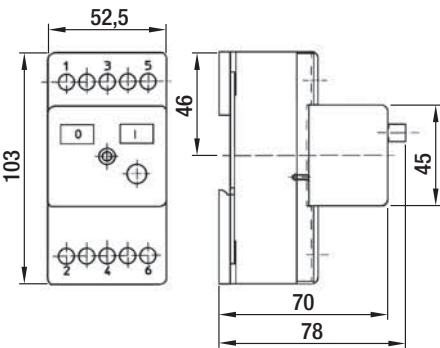

– **Electr. connection:**

