

EC centrifugal fans - RadiPac

backward curved, single inlet, Ø 280



Highlights:

- 7-blade fan, 3-phase fan motor
- Output: 10 VDC, max.10 mA, 20 VDC, max. 50 mA, slave 0-10 V
- Input: sensor 0-10 V or 4-20 mA, 24 V external programming, 0-10 VDC/ PWM control
- Integrated PID controller along with RS485 MODBUS RTU technology
- Over-temperature protected electronics / motor
- Soft start, alarm relay, motor current limit, PFC passive, line undervoltage / phase failure detection
- Control interface with SELV potential safely disconnected from the mains

Material: Impeller: Aluminum sheet

Rotor: Coated in black

Electronic housing: Die-cast aluminum

Assembly: Galvanized steel with aluminum posts

Mounting position: Shaft horizontal or rotor on bottom; rotor on top on request

Condensate discharge holes: Rotor-side


Direction of rotation: Clockwise, seen on rotor

Nominal Data

Type	RadiPac	Motor	Air flow		Nominal voltage range		Frequency	Power input (1)	Speed (1)	Current draw (1)	Temperature range (1)	Mass	Ingress protection rating	Electrical wiring diagram	UL
			CFM	VAC	Hz	Watts	RPM	A	°C	lbs					
R3G280-AU11-C1	EG1R-480-280-13	M3G084-GF	2,316	380...480	50/60	1,000	3,100	1.4	-25...60	15.6	IP54	A			Yes

(1) Nominal data at maximum load.

Curves

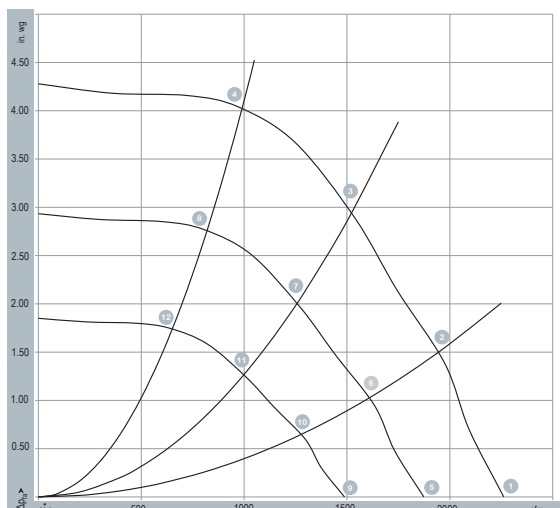

Air performance measured as per:
ISO 5801, installation category
A, without protection against
accidental contact.

Suction-side noise levels: LWA as
per ISO 13347, LpA measured at
1m distance to fan axis.

The values given are valid
under the measuring conditions
mentioned and may vary according
to the actual installation situation.

With any deviation to the standard
set-up, the specific values have
to be checked and reviewed once
installed or fitted.

For detailed information on the
measuring set-up, please contact
ebm-papst.

	n rpm	Pe W	I A (460V)	LwAin dB(A)
1	3100	645	0.9	86
2	3100	852	1.2	83
3	3100	1000	1.4	80
4	3100	921	1.3	83
5	2575	358	0.5	82
6	2575	482	0.7	79
7	2575	562	0.8	76
8	2575	514	0.7	79
9	2045	180	0.3	77
10	2045	242	0.3	74
11	2045	282	0.4	71
12	2045	257	0.4	74

