

RG175/2000-3633

EC centrifugal fan

single-intake

with housing (flange), Gas blower for condensing boilers



ebm-papst Landshut GmbH

Hofmark-Aich-Straße 25

D-84030 Landshut

Phone +49 (0) 871 707-0

Fax +49 (0) 871 707-465

info3@de.ebmpapst.com

www.ebmpapst.com

Nominal data

Type	RG175/2000-3633	
Phase		1~
Nominal voltage	VAC	230
Frequency	Hz	50
Speed (rpm)	min ⁻¹	8400
Power consumption	W	240
Min. back pressure	Pa	2000
Min. back pressure	inH ₂ O	8.03
Air flow	m ³ /h	216
Pressure increase	Pa	4200

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change



EC centrifugal fan

single-intake

with housing (flange), Gas blower for condensing boilers

Technical description

General description	The values given only apply to the catalog type with item number 55667.14090
Weight	3.3 kg
Housing material	Die-cast aluminum
Installation position	Must be specified due to position-dependent support elements
Storage	Ball bearing
Cable	B and C




EC centrifugal fan

single-intake

with housing (flange), Gas blower for condensing boilers

Product drawing

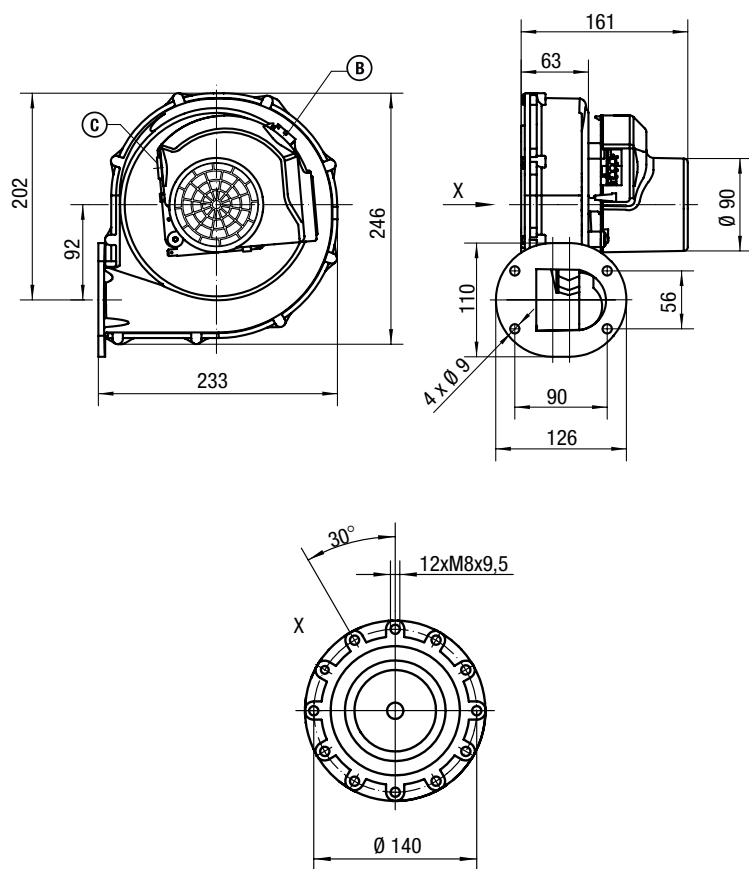


EC centrifugal fan

single-intake

with housing (flange), Gas blower for condensing boilers


Connection diagram

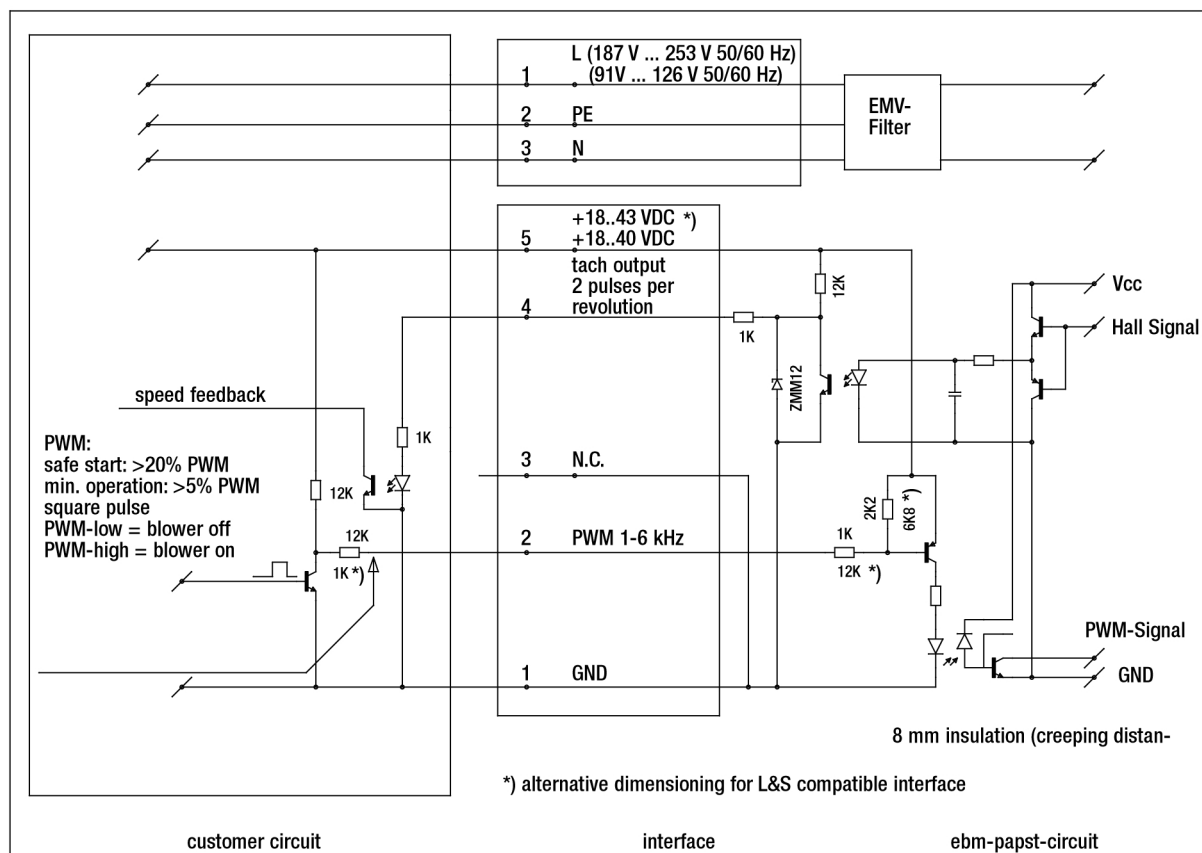

EC centrifugal fan

single-intake
with housing (flange), Gas blower for condensing boilers

Curves: Air performance

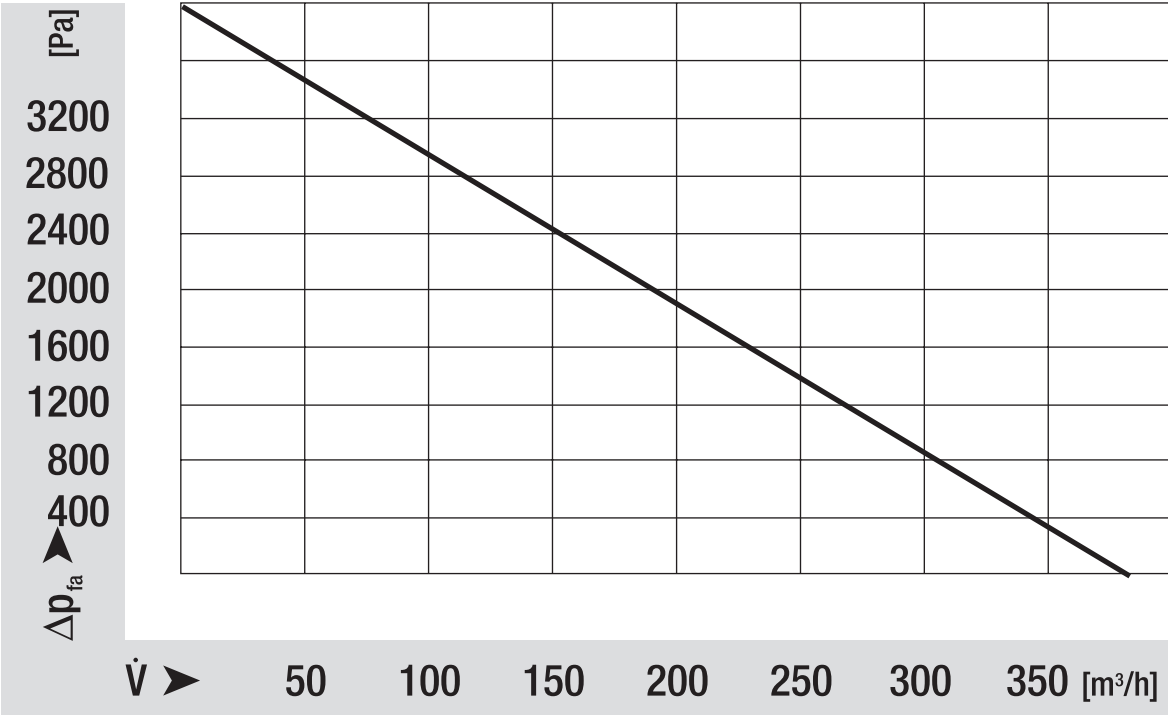

EC centrifugal fan

single-intake
with housing (flange), Gas blower for condensing boilers

Curves: Speed (rpm)

