

**ebm-papst Mulfingen GmbH & Co. KG**

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.ebmpapst.com

www.ebmpapst.com

Limited partnership · Headquarters Mulfingen

County court Stuttgart · HRA 590344

General partner: Elektrobau Mulfingen GmbH · Headquarters Mulfingen

County court Stuttgart · HRB 590142

**Nominal data**

|                          |                   |            |
|--------------------------|-------------------|------------|
| Type                     | S3G560-AQ41-04    |            |
| Motor                    | M3G112-GA         |            |
| Phase                    |                   | 3~         |
| Nominal voltage          | VAC               | 400        |
| Nominal voltage range    | VAC               | 380 .. 480 |
| Frequency                | Hz                | 50/60      |
| Type of data definition  |                   | ml         |
| Speed                    | min <sup>-1</sup> | 1350       |
| Power input              | W                 | 945        |
| Current draw             | A                 | 1.5        |
| Max. back pressure       | Pa                | 180        |
| Min. ambient temperature | °C                | -25        |
| Max. ambient temperature | °C                | 60         |

ml = max. load · me = max. efficiency · fa = running at free air · cs = customer specs · cu = customer unit  
Subject to alterations

**Data according to ErP directive**

|                                 |            |
|---------------------------------|------------|
| Installation category           | A          |
| Efficiency category             | Static     |
| Variable speed drive integrated | Integrated |
| Specific ratio*                 | 1,00       |

\* Specific ratio =  $1 + p_b / 100\,000\text{ Pa}$

|                                | Actual            | Request 2013 | Request 2015 |
|--------------------------------|-------------------|--------------|--------------|
| Overall efficiency $\eta_{es}$ | 42,9              | 29,5         | 33,5         |
| Efficiency grade N             | 49,4              | 36           | 40           |
| Power input $P_{ed}$           | kW                | 0,93         |              |
| Air flow $q_v$                 | m <sup>3</sup> /h | 7890         |              |
| Pressure increase $p_{fs}$     | Pa                | 168          |              |
| Speed n                        | min <sup>-1</sup> | 1360         |              |

Data established at point of optimum efficiency



## Technical features

|                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|---------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Mass                                                    | 15.4 kg                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Size                                                    | 560 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Surface of rotor                                        | Coated in black                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Material of electronics housing                         | Die-cast aluminium, coated in black                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Material of blades                                      | Aluminium sheet insert, sprayed with PP plastic                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Material of guard grille                                | Steel, phosphated and coated in black plastic                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Number of blades                                        | 5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Direction of air flow                                   | "A"                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Direction of rotation                                   | Clockwise, seen on rotor                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Type of protection                                      | IP 54                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Insulation class                                        | "B"                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Humidity class                                          | F4-1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Max. permissible ambient motor temp. (transp./ storage) | +80 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Min. permissible ambient motor temp. (transp./storage)  | -40 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Mounting position                                       | Shaft horizontal or rotor on bottom; rotor on top on request                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Condensate discharge holes                              | Rotor-side                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Operation mode                                          | S1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Motor bearing                                           | Ball bearing                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Technical features                                      | <ul style="list-style-type: none"> <li>- Output 10 VDC, max. 10 mA</li> <li>- Output 20 VDC, max. 50 mA</li> <li>- Output for slave 0-10 V</li> <li>- Input for sensor 0-10 V or 4-20 mA</li> <li>- Alarm relay</li> <li>- Integrated PID controller</li> <li>- Motor current limit</li> <li>- PFC, passive</li> <li>- RS485 ebmBUS</li> <li>- Soft start</li> <li>- Control input 0-10 VDC / PWM</li> <li>- Control interface with SELV potential safely disconnected from the mains</li> <li>- Over-temperature protected electronics / motor</li> <li>- Line undervoltage / phase failure detection</li> </ul> |
| EMC interference immunity                               | Acc. to EN 61000-6-2 (industrial environment)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| EMC interference emission                               | Acc. to EN 61000-6-3 (household environment)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| EMC harmonics                                           | Acc. to EN 61000-3-2/3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Leakage current                                         | ≤ 3.5 mA                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Electrical leads                                        | Via terminal box                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Motor protection                                        | Thermal overload protector (TOP) wired internally                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Cable exit                                              | Variable                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Protection class                                        | I (if protective earth is connected by customer)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Product conforming to standard                          | EN 61800-5-1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |




## EC axial fan - HyBlade®

sickled blades (S series)

with guard grille for short nozzle


## Product drawing

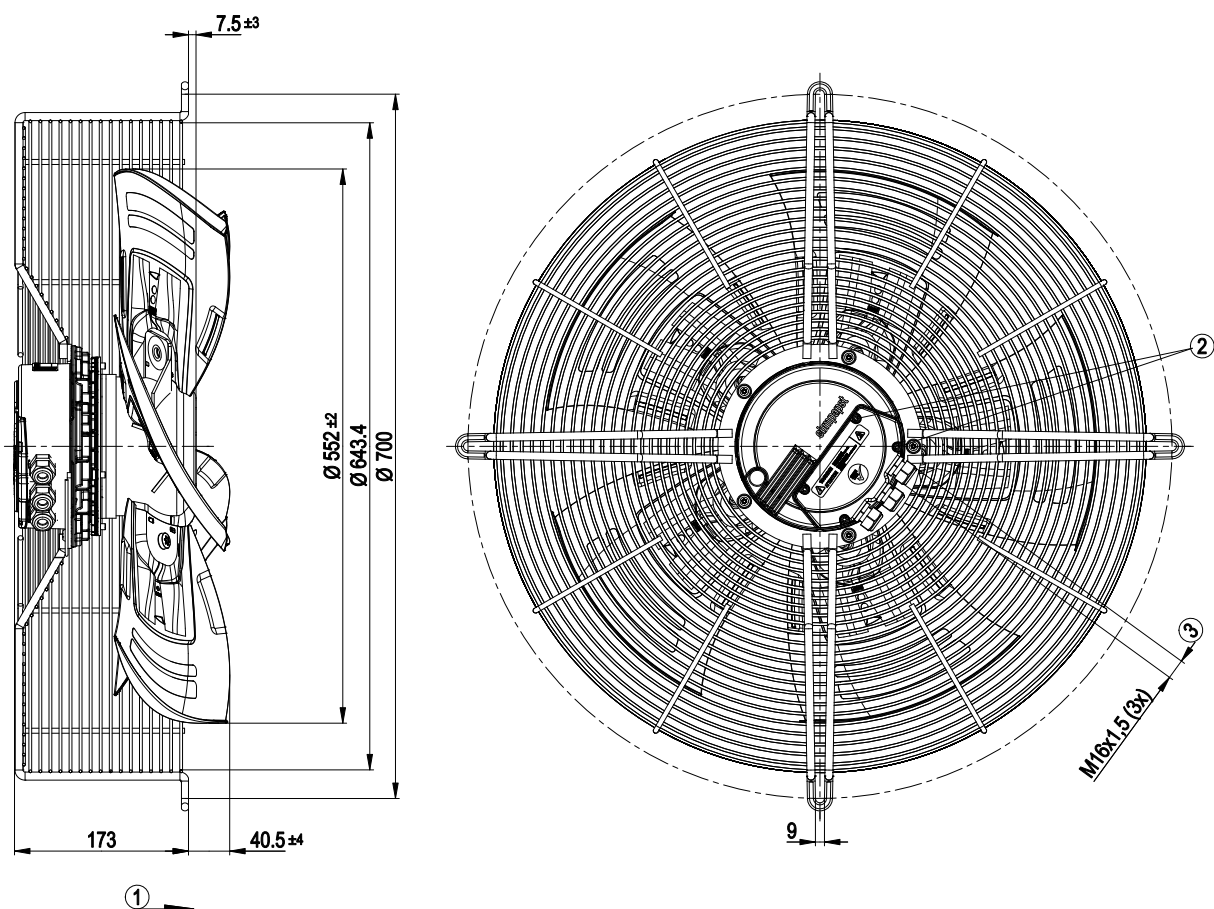

|   |                                                                            |
|---|----------------------------------------------------------------------------|
| 1 | Direction of air flow "A"                                                  |
| 2 | Tightening torque $3.5 \pm 0.5$ Nm                                         |
| 3 | Cable diameter: min. 4 mm, max. 10 mm, tightening torque: $2.5 \pm 0.4$ Nm |




## Connection screen

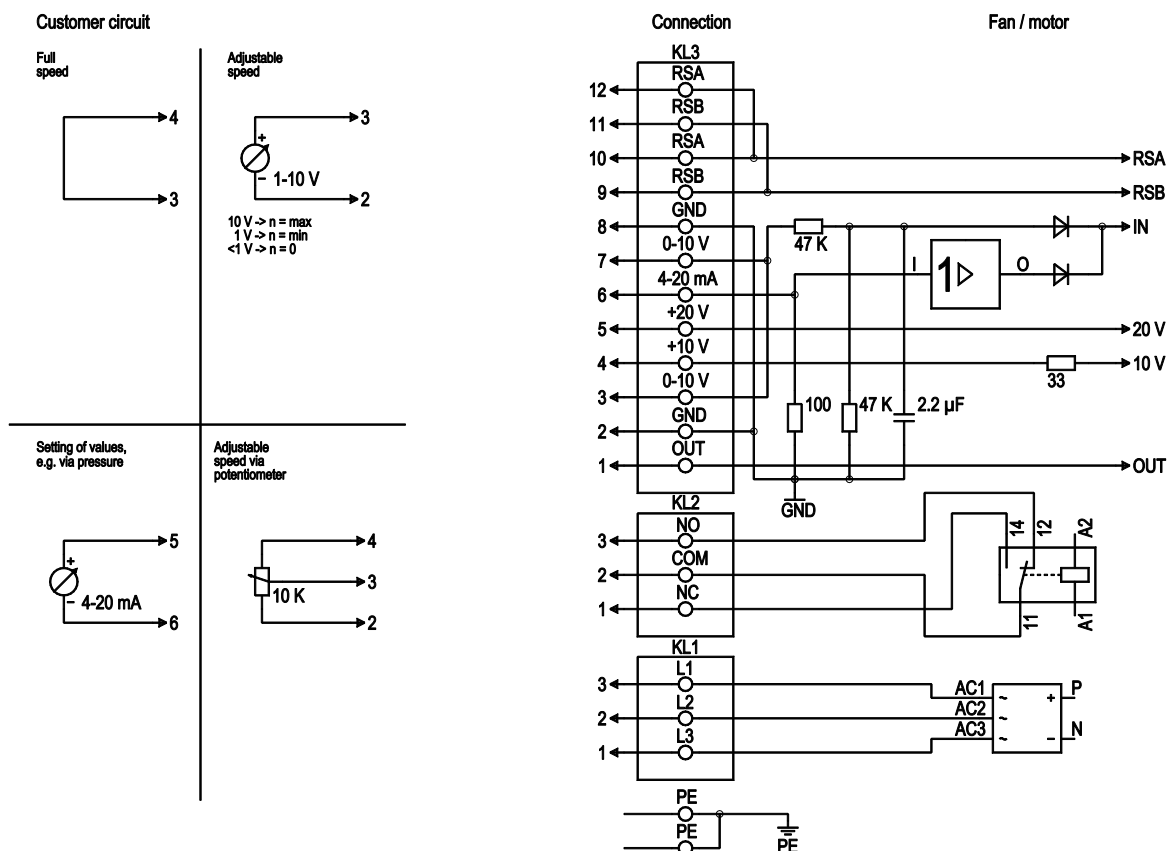

| No. | Pin     | Signal     | Function / assignment                                                                                                                                                                   |
|-----|---------|------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PE  |         | PE         | Protective earth connection                                                                                                                                                             |
| KL1 | 1, 2, 3 | L1, L2, L3 | Supply voltage, 50/60 Hz                                                                                                                                                                |
| KL2 | 1       | NC         | Floating status message contact, normally closed connection                                                                                                                             |
| KL2 | 2       | COM        | Floating status message contact, changeover contact, common connection (2 A, max. 250 VAC, min. 10 mA, AC1)                                                                             |
| KL2 | 3       | NO         | Floating status message contact, normally open connection                                                                                                                               |
| KL3 | 1       | OUT        | Analog output, 0-10 VDC, max. 3 mA, SELV, output of the current level control coefficient: 1 V equates to 10% level control coefficient. 10 V equate to 100% level control coefficient. |
| KL3 | 2, 8    | GND        | Reference mass for control interface, SELV                                                                                                                                              |
| KL3 | 3, 7    | 0-10 V     | Use control / actual value input 0-10 VDC, impedance 100 kΩ only as alternative to 4-20 mA input, SELV                                                                                  |
| KL3 | 4       | +10 V      | Voltage output 10 VDC (+/-3%), max. 10 mA, supply voltage for external devices (e.g. potentiometers), SELV                                                                              |
| KL3 | 5       | +20 V      | Voltage output 20 VDC (+25%/-10%), max. 50 mA, supply voltage for external devices (e.g. sensors), SELV                                                                                 |
| KL3 | 6       | 4-20 mA    | Use control / actual value input 4-20 mA, impedance 100 Ω, only as alternative to 0-10 V input, SELV                                                                                    |
| KL3 | 9, 11   | RSB        | RS485 interface for ebmBus, RSB, SELV                                                                                                                                                   |
| KL3 | 10, 12  | RSA        | RS485 interface for ebmBus, RSA, SELV                                                                                                                                                   |

## Charts: Air flow 50 Hz

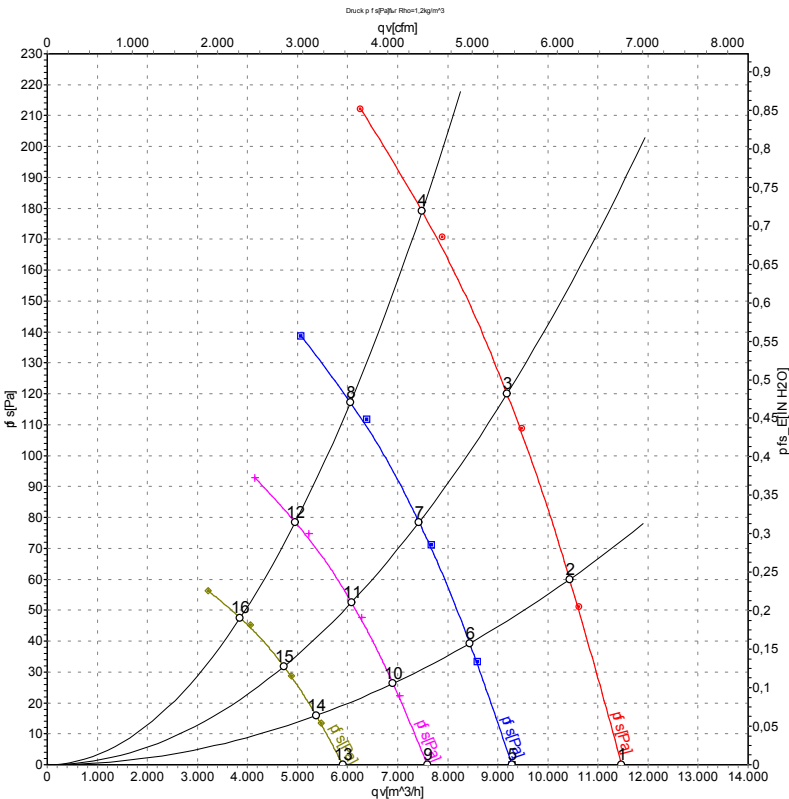

Measurement: LU-116554

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

## Measured values

|    | U   | f  | n                 | P <sub>ed</sub> | I    | LpA <sub>in</sub> | LwA <sub>in</sub> | LwA <sub>out</sub> | qv    | p <sub>fs</sub> |
|----|-----|----|-------------------|-----------------|------|-------------------|-------------------|--------------------|-------|-----------------|
|    | V   | Hz | min <sup>-1</sup> | W               | A    | dB(A)             | dB(A)             | dB(A)              | m³/h  | Pa              |
| 1  | 400 | 50 | 1350              | 672             | 1.10 | 68                | 75                | 75                 | 11470 | 0               |
| 2  | 400 | 50 | 1350              | 781             | 1.25 | 67                | 74                | 74                 | 10430 | 60              |
| 3  | 400 | 50 | 1350              | 872             | 1.38 | 67                | 73                | 73                 | 9180  | 120             |
| 4  | 400 | 50 | 1350              | 945             | 1.50 | 71                | 78                | 77                 | 7485  | 180             |
| 5  | 400 | 50 | 1100              | 356             | 0.58 | 64                | 70                | 70                 | 9280  | 0               |
| 6  | 400 | 50 | 1100              | 413             | 0.66 | 63                | 69                | 69                 | 8440  | 40              |
| 7  | 400 | 50 | 1100              | 461             | 0.73 | 62                | 69                | 69                 | 7425  | 79              |
| 8  | 400 | 50 | 1100              | 498             | 0.79 | 67                | 73                | 73                 | 6055  | 118             |
| 9  | 400 | 50 | 900               | 195             | 0.32 | 59                | 66                | 66                 | 7595  | 0               |
| 10 | 400 | 50 | 900               | 226             | 0.36 | 58                | 65                | 65                 | 6905  | 27              |
| 11 | 400 | 50 | 900               | 253             | 0.40 | 58                | 64                | 64                 | 6075  | 53              |
| 12 | 400 | 50 | 900               | 273             | 0.43 | 62                | 69                | 68                 | 4955  | 79              |
| 13 | 400 | 50 | 700               | 92              | 0.15 | 54                | 60                | 61                 | 5905  | 0               |
| 14 | 400 | 50 | 700               | 106             | 0.17 | 53                | 59                | 60                 | 5370  | 16              |
| 15 | 400 | 50 | 700               | 119             | 0.19 | 52                | 59                | 59                 | 4725  | 32              |
| 16 | 400 | 50 | 700               | 128             | 0.20 | 57                | 63                | 63                 | 3855  | 48              |

