



Roulements à billes
Bobinage Classe F
Protection IP44 selon EN60034-5 à vérifier selon position et installation
Equilibrage G6.3
Hélice plastique PA UL 94 V-0
Rotor peint en noir


Ball bearings
F Class winding
IP44 protection according to EN60034-5 to be checked according to the position and installation
Balancing G6.3
Plastic PA UL 94 V-0 impeller
Black painted rotor

Kugellager
Cl.F Wicklung
IP44 Schutz gemäß EN60034-5 je nach Installation zu prüfen
Auswuchtgüte G6.3
Laufblad aus PA UL 94 V-0 Kunststoff
Schwarz beschichtet Rotor

Données techniques / Technical data / Technische Daten

400V / 50Hz


400V / 60Hz

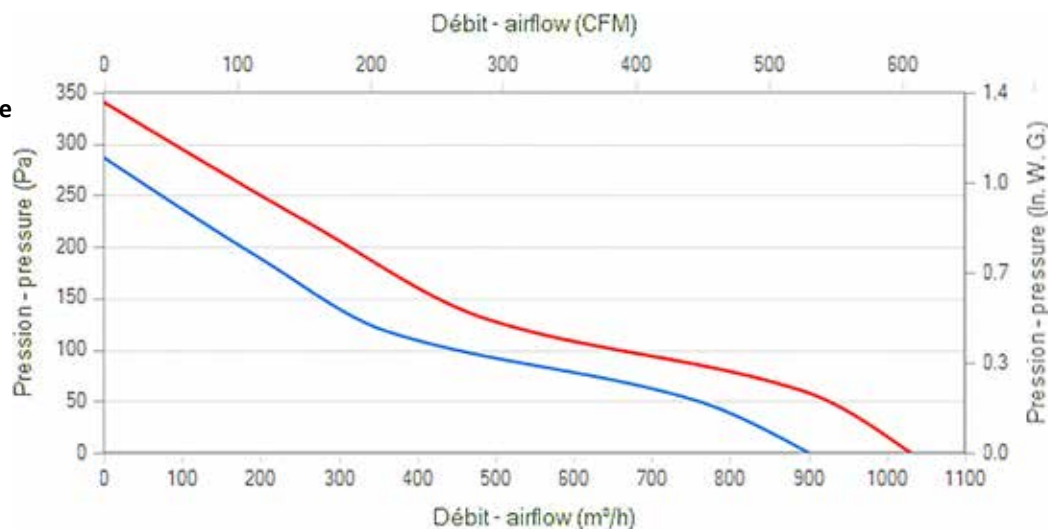


										T° max (Utilisation / Operating / Betrieb)		Kgs	Connecteur / Connector / Anschlußstecker	Grille / Finger guards / Schutzgit- ter	Plan / Drawing / Zeichnung
Modèle / Type / Typ	U V	f Hz	P Wa	IN A	m3/h	CFM	n RPM	dBA	tR C°	tR F°					
R10-26	2VREt25 200A	400	50	77	0,25	900	529	2760	63,5	-20 / +70	-4 / 158	1,4	09172 - 39658	21188	1
R10-26	2VREt25 200A	400	60	92	0,19	1030	606	3160	67,2	-20 / +70	-4 / 158	1,4	09172 - 39658	21188	1
R10-27	2VREt25 200V	400	50	72	0,23	1020	600	2795	61,6	-20 / +70	-4 / 158	1,4	09172 - 39658	21188	1
R10-27	2VREt25 200V	400	60	96	0,18	1100	647	3125	64,6	-20 / +70	-4 / 158	1,4	09172 - 39658	21188	1
R12-02	2VGrt25 200A	400	50	77	0,25	900	529	2760	63,5	-20 / +70	-4 / 158	1,6	09172 - 39658		2
R12-02	2VGrt25 200A	400	60	92	0,19	1030	606	3160	67,2	-20 / +70	-4 / 158	1,6	09172 - 39658		2
R12-03	2VGrt25 200V	400	50	72	0,23	1020	600	2795	61,6	-20 / +70	-4 / 158	1,6	09172 - 39658		2
R12-03	2VGrt25 200V	400	60	96	0,18	1100	647	3125	64,6	-20 / +70	-4 / 158	1,6	09172 - 39658		2
R12-18	2VPrt25 200A	400	50	77	0,25	900	529	2760	63,5	-20 / +70	-4 / 158	1,8	09172 - 39658		3
R12-18	2VPrt25 200A	400	60	92	0,19	1030	606	3160	67,2	-20 / +70	-4 / 158	1,8	09172 - 39658		3
R12-19	2VPrt25 200V	400	50	72	0,23	1020	600	2795	61,6	-20 / +70	-4 / 158	1,8	09172 - 39658		3
R12-19	2VPrt25 200V	400	60	96	0,18	1100	647	3125	64,6	-20 / +70	-4 / 158	1,8	09172 - 39658		3
R12-34	2VGvt25 200A	400	50	77	0,25	900	529	2760	63,5	-20 / +70	-4 / 158	2,2	09172 - 39658		4
R12-34	2VGvt25 200A	400	60	92	0,19	1030	606	3160	67,2	-20 / +70	-4 / 158	2,2	09172 - 39658		4
R12-35	2VGvt25 200V	400	50	72	0,23	1020	600	2795	61,6	-20 / +70	-4 / 158	2,2	09172 - 39658		4
R12-35	2VGvt25 200V	400	60	96	0,18	1100	647	3125	64,6	-20 / +70	-4 / 158	2,2	09172 - 39658		4
R12-50	2VGct25 200A	400	50	77	0,25	900	529	2760	63,5	-20 / +70	-4 / 158	2,6	09172 - 39658		5
R12-50	2VGct25 200A	400	60	92	0,19	1030	606	3160	67,2	-20 / +70	-4 / 158	2,6	09172 - 39658		5
R12-51	2VGct25 200V	400	50	72	0,23	1020	600	2795	61,6	-20 / +70	-4 / 158	2,6	09172 - 39658		5
R12-51	2VGct25 200V	400	60	96	0,18	1100	647	3125	64,6	-20 / +70	-4 / 158	2,6	09172 - 39658		5

Dimensions / Dimensions / Masse :


1

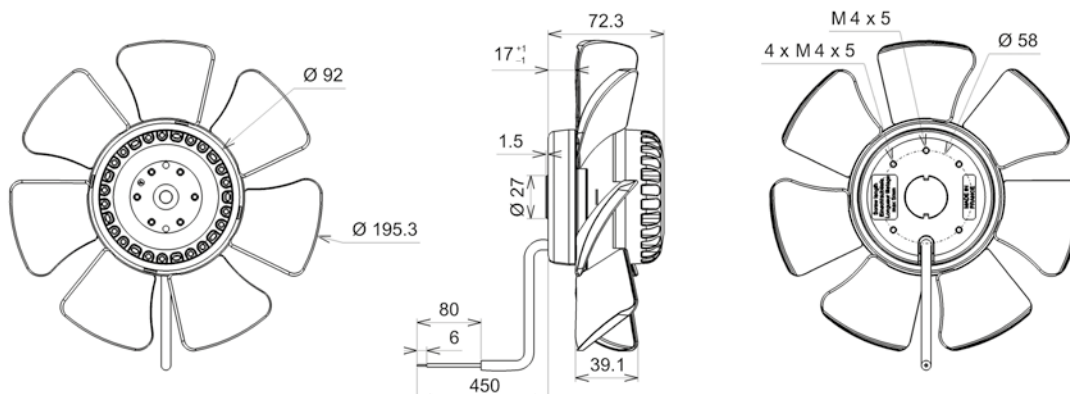


2

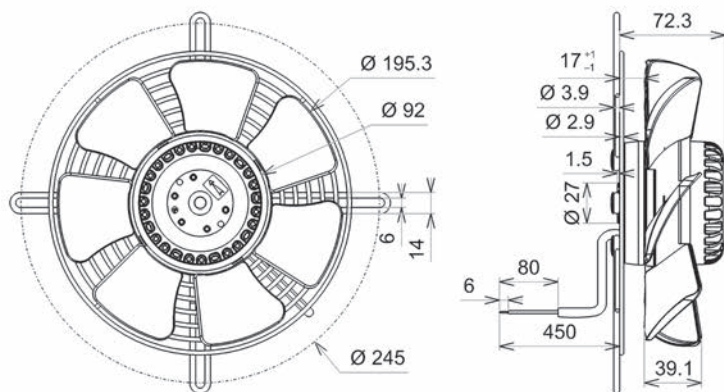

3

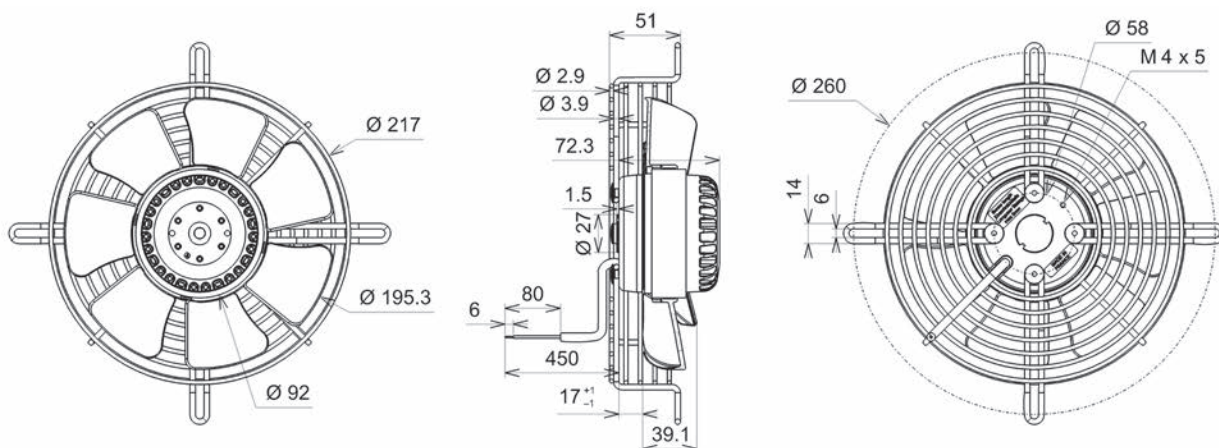

4

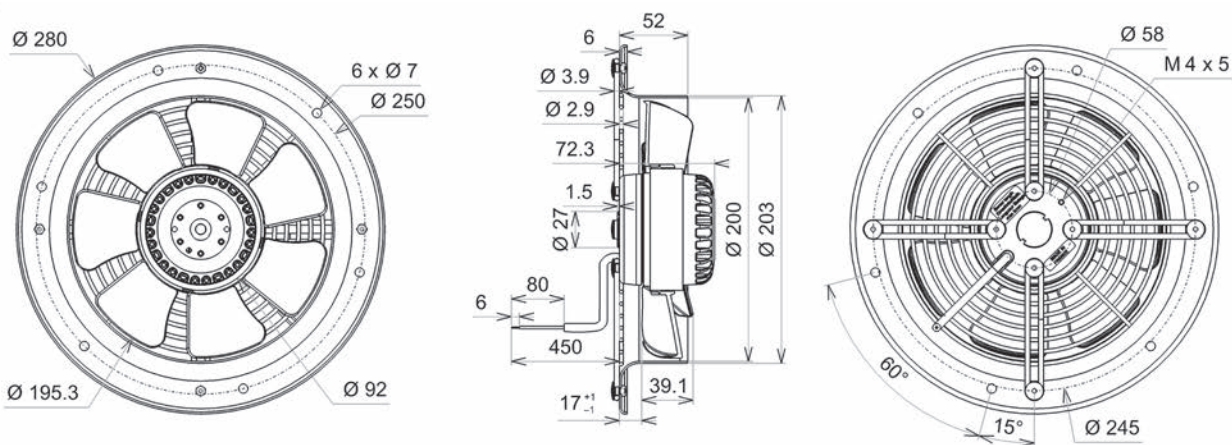

5

