



Roulements à billes
Bobinage Classe F
Protection IP44 selon EN60034-5 à vérifier selon position et installation
Equilibrage G6.3
Hélice plastique PA UL 94 V-0
Rotor peint en noir


Ball bearings
F Class winding
IP44 protection according to EN60034-5 to be checked according to the position and installation
Balancing G6.3
Plastic PA UL 94 V-0 impeller
Black painted rotor

Kugellager
Cl.F Wicklung
IP44 Schutz gemäß EN60034-5 je nach Installation zu prüfen
Auswuchtgüte G6.3
Laufblad aus PA UL 94 V-0 Kunststoff
Schwarz beschichtet Rotor

Données techniques / Technical data / Technische Daten

400V / 50Hz


400V / 60Hz

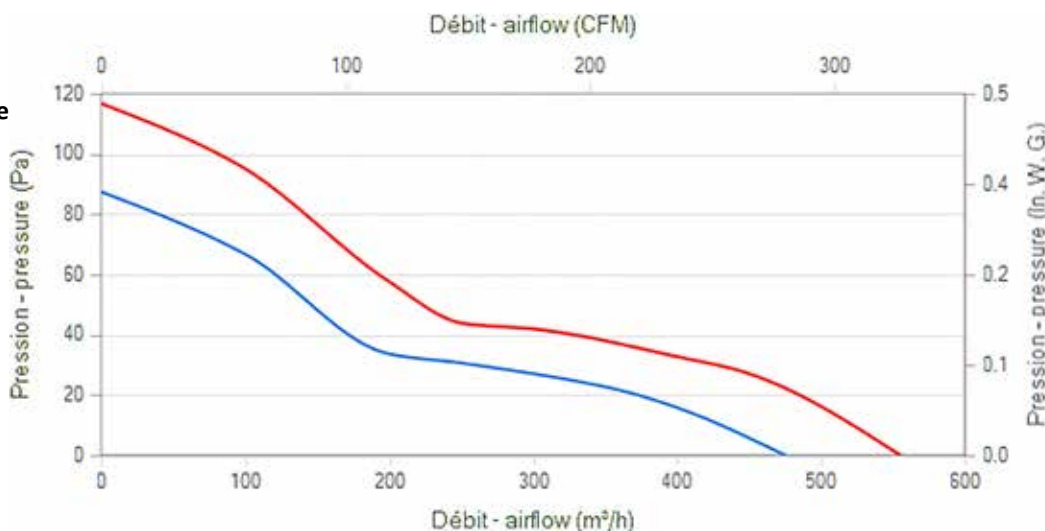



Modèle / Type / Typ		U V	f Hz	P Wa	IN A	m3/h	CFM	n RPM	dBA	T° max (Utilisation / Operating / Betrieb)		Kgs	Connecteur / Connector / Anschlußstecker	Grille / Finger guards / Schutzgit- ter	Plan / Drawing / Zeichnung
										tR C°	tR F°				
R10-32	4VREt25 200A	400	50	37	0,13	475	279	1460	45,7	-20 / +60	-4 / 140	1,4	09172 - 39658	21188	1
R10-32	4VREt25 200A	400	60	32	0,11	555	326	1715	53,2	-20 / +70	-4 / 158	1,4	09172 - 39658	21188	1
R10-33	4VREt25 200V	400	50	33	0,12	500	294	1460	45,7	-20 / +70	-4 / 158	1,4	09172 - 39658	21188	1
R10-33	4VREt25 200V	400	60	29	0,1	605	356	1720	53,2	-20 / +70	-4 / 158	1,4	09172 - 39658	21188	1
R12-08	4VGrt25 200A	400	50	37	0,13	475	279	1460	45,7	-20 / +60	-4 / 140	1,6	09172 - 39658		2
R12-08	4VGrt25 200A	400	60	32	0,11	555	326	1715	53,2	-20 / +70	-4 / 158	1,6	09172 - 39658		2
R12-09	4VGrt25 200V	400	50	33	0,12	500	294	1460	45,7	-20 / +70	-4 / 158	1,6	09172 - 39658		2
R12-09	4VGrt25 200V	400	60	29	0,1	605	356	1720	53,2	-20 / +70	-4 / 158	1,6	09172 - 39658		2
R12-24	4VPrt25 200A	400	50	37	0,13	475	279	1460	45,7	-20 / +60	-4 / 140	1,8	09172 - 39658		3
R12-24	4VPrt25 200A	400	60	32	0,11	555	326	1715	53,2	-20 / +70	-4 / 158	1,8	09172 - 39658		3
R12-25	4VPrt25 200V	400	50	33	0,12	500	294	1460	45,7	-20 / +70	-4 / 158	1,8	09172 - 39658		3
R12-25	4VPrt25 200V	400	60	29	0,1	605	356	1720	53,2	-20 / +70	-4 / 158	1,8	09172 - 39658		3
R12-40	4VGvt25 200A	400	50	37	0,13	475	279	1460	45,7	-20 / +60	-4 / 140	2,2	09172 - 39658		4
R12-40	4VGvt25 200A	400	60	32	0,11	555	326	1715	53,2	-20 / +70	-4 / 158	2,2	09172 - 39658		4
R12-41	4VGvt25 200V	400	50	33	0,12	500	294	1460	45,7	-20 / +70	-4 / 158	2,2	09172 - 39658		4
R12-41	4VGvt25 200V	400	60	29	0,1	605	356	1720	53,2	-20 / +70	-4 / 158	2,2	09172 - 39658		4
R12-56	4VGct25 200A	400	50	37	0,13	475	279	1460	45,7	-20 / +60	-4 / 140	2,6	09172 - 39658		5
R12-56	4VGct25 200A	400	60	32	0,11	555	326	1715	53,2	-20 / +70	-4 / 158	2,6	09172 - 39658		5
R12-57	4VGct25 200V	400	50	33	0,12	500	294	1460	45,7	-20 / +70	-4 / 158	2,6	09172 - 39658		5
R12-57	4VGct25 200V	400	60	29	0,1	605	356	1720	53,2	-20 / +70	-4 / 158	2,6	09172 - 39658		5

Dimensions / Dimensions / Masse :



1

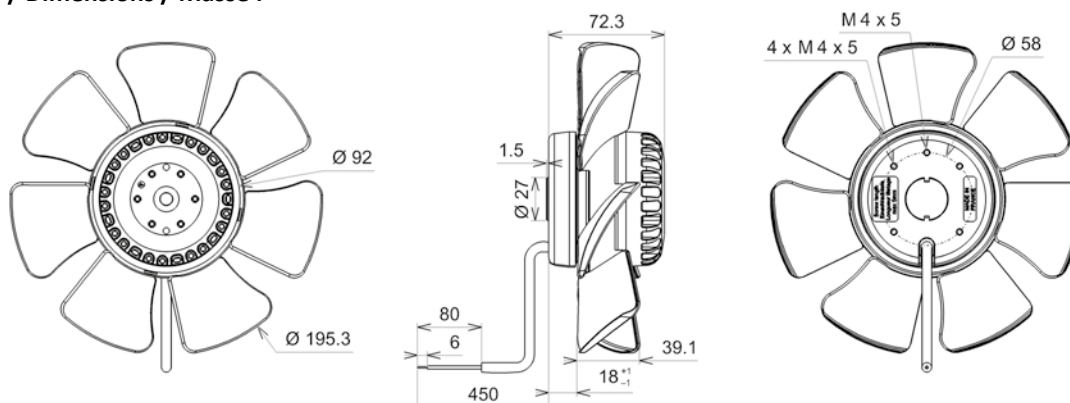



2

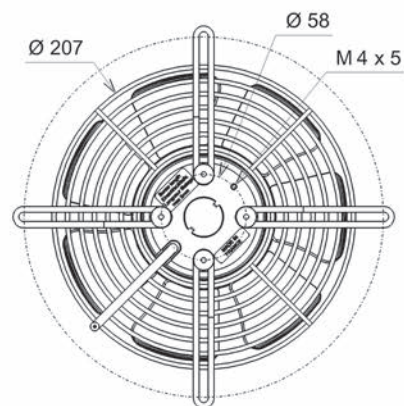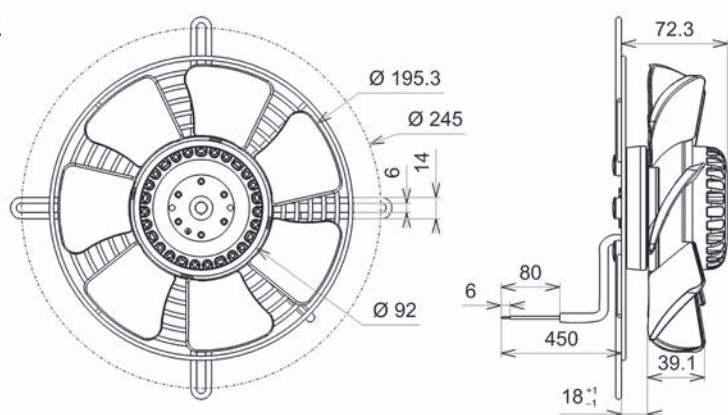

3

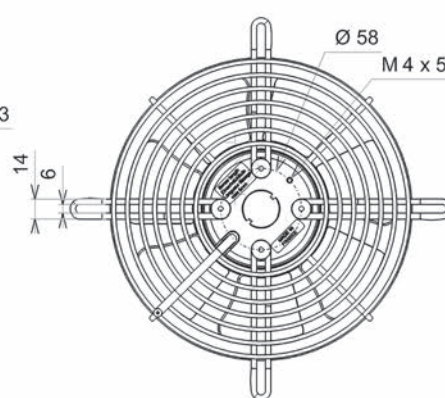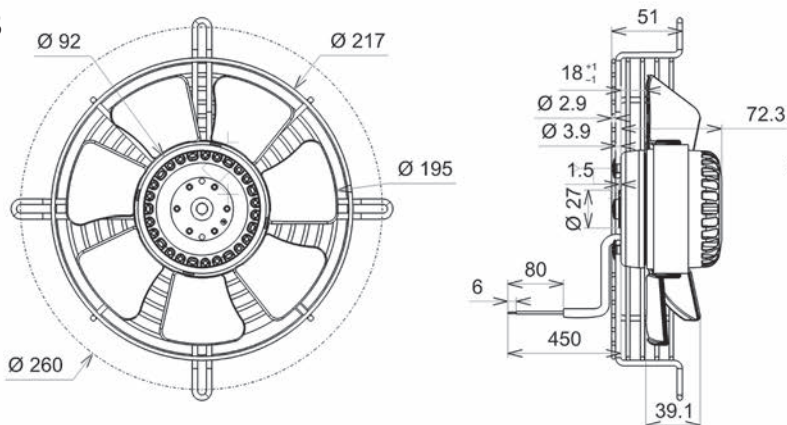

4

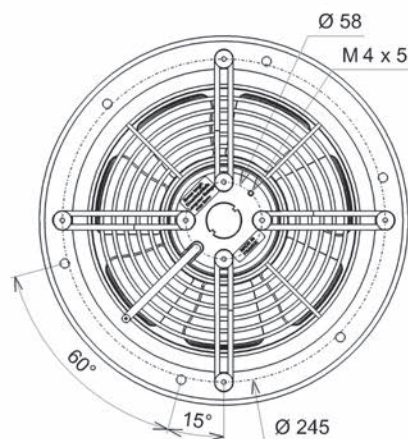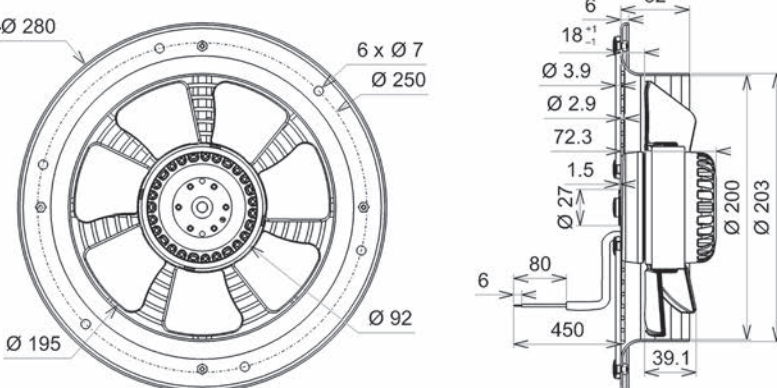

5

