



Roulements à billes
Bobinage Classe F
Protection IP54 selon EN60034-5 à vérifier selon position et installation
Equilibrage G2.5
Rotor électrozingué
Volute peinte en noir

Ball bearings
F Class winding
IP54 protection according to EN60034-5 to be checked according to position and installation
Balancing G2.5
Electrolytic galvanized rotor
Black painted housing


Kugellager
Cl.F Wicklung
IP54 Schutz gemäß EN60034-5 je nach Installation zu prüfen
Auswuchtgüte G2.5
Elektroverzinkte Rotor
Schwarz beschichtet Gehäuse

Données techniques / Technical data / Technische Daten

Alimentation / Power supply / Strom
230V 50/60Hz


U Pilotage / Control /
Steuerung


2V
4V
6V
8V
10V

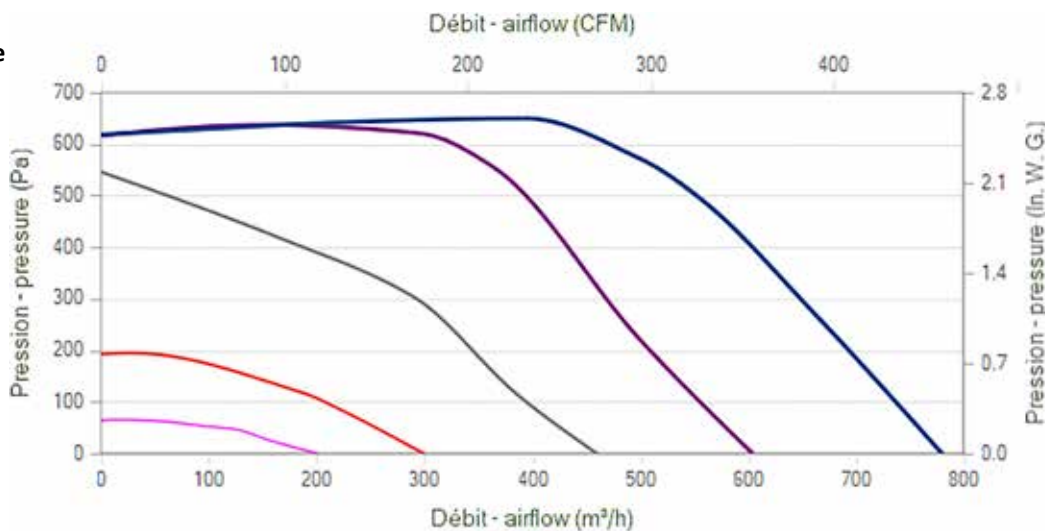

Modèle / Type / Typ		U V	f Hz	P W	IN A	m3/h	CFM	n RPM	T° max (Utilisation / Operating / Betrieb)		Kgs	Grille / Finger guards / Schutzgitter	Plan / Drawing / Zeichnung
Q38-A0	GREV8 160x62R	200 - 277	50/60	300	1,33	780	459	2695	-20 / +60	-4 / 140	4	21325	1
Q38-A1	GREV8 160x62R	200 - 277	50/60	300	1,33	780	459	2695	-20 / +60	-4 / 140	4	21325	2

Dimensions / Dimensions / Masse :

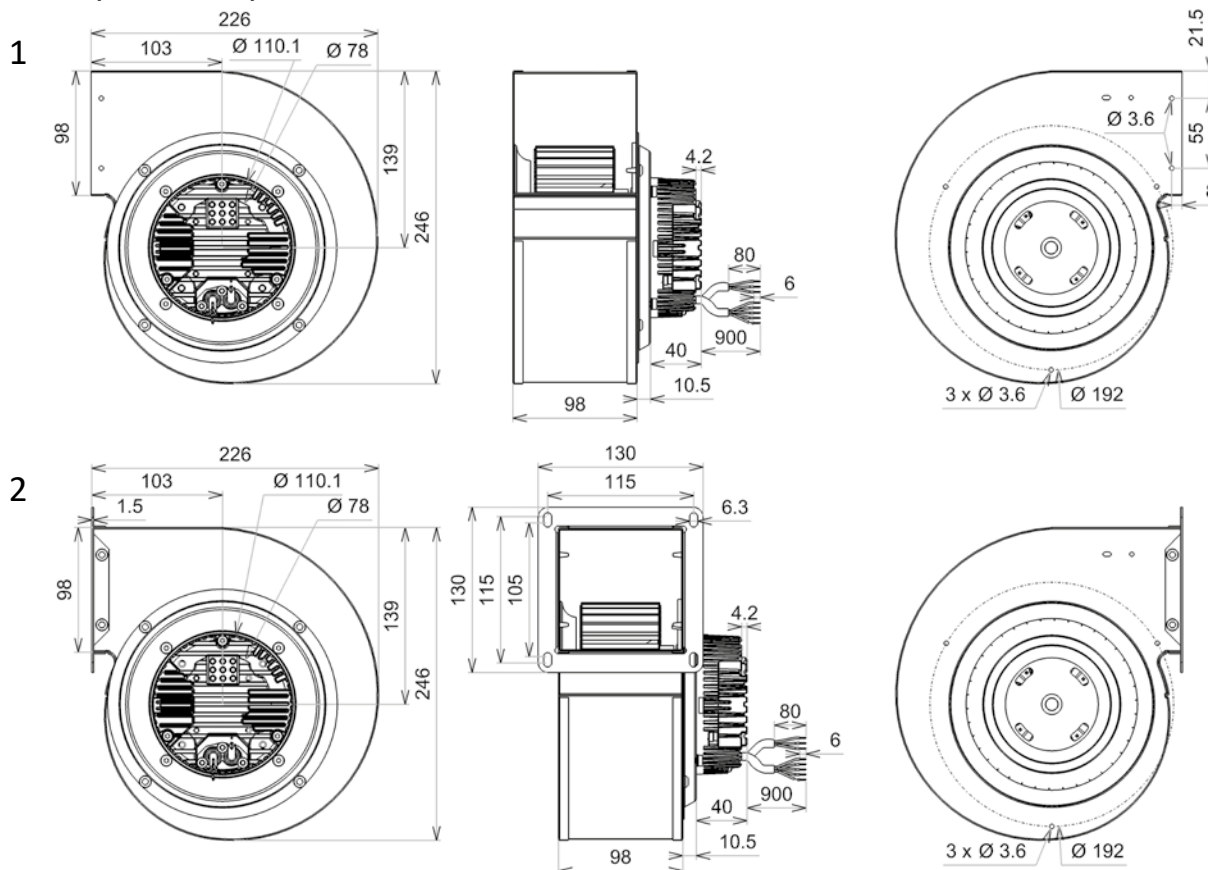



Roulements à billes
Bobinage Classe F
Protection IP54 selon EN60034-5 à vérifier selon position et installation
Équilibrage G2.5
Rotor électrozingué
Volute peinte en noir

Ball bearings
F Class winding
IP54 protection according to EN60034-5 to be checked according to position and installation
Balancing G2.5
Electrolytic galvanized rotor
Black painted housing


Kugellager
Cl.F Wicklung
IP54 Schutz gemäß EN60034-5 je nach Installation zu prüfen
Auswuchtgüte G2.5
Elektroverzinkte Rotor
Schwarz beschichtet Gehäuse

**Données techniques /
Technical data / Technische
Daten**

Alimentation / Power supply / Strom
230V 50/60Hz

**U Pilotage / Control /
Steuerung**

2V
4V
6V
8V
10V

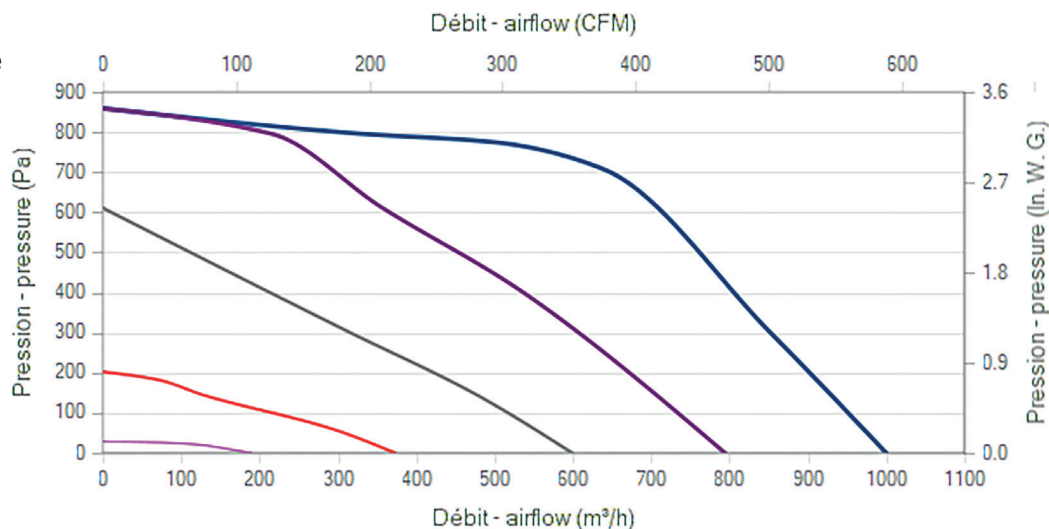

Modèle / Type / Typ	U V	f Hz	P Wa	IN A	m³/h	CFM	n RPM	T°max (Utilisation / Operating / Betrieb)		Kgs	Grille / Finger guards / Schutzgitter	Plan / Drawing / Zeichnung
								tR C°	tR F°			
Q38-A2 GREV8 180x75R	230	50/60	300	1,32	1000	588	2040	-20 / +60	-4 / 140	4,5	21194	1
Q38-A3 GREV8 180x75R	230	50/60	300	1,32	1000	588	2040	-20 / +60	-4 / 140	4,6	21194	2

Dimensions / Dimensions / Masse :

