



Roulements à billes
Bobinage Classe F
Protection IP54 selon EN60034-5 à vérifier selon position et installation
Equilibrage G6.3
Rotor électrozingué
Hélice peinte noire

Ball bearings
F Class winding
IP54 protection according to EN60034-5 to be checked according to position and installation
Balancing G6.3
Electrolytic galvanized rotor
Black painted impeller


Kugellager
Cl.F Wicklung
IP54 Schutz gemäß EN60034-5 je nach Installation zu prüfen
Auswuchtgüte G6.3
Elektroverzinkte Rotor
Schwarz beschichtet Laufrad

Données techniques / Technical data / Technische Daten

Alimentation / Power supply / Strom
230V 50/60Hz

U Pilotage / Control /
Steuerung

2V
4V
6V
8V
10V

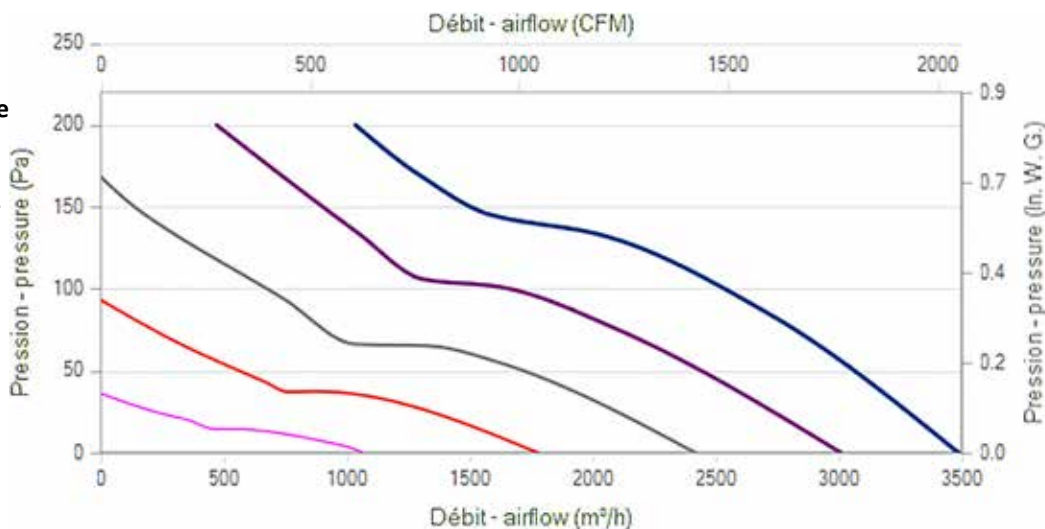

Modèle / Type / Typ		U V	f Hz	P Wa	IN A	m3/h	CFM	n RPM	T° max (Utilisation / Operating / Betrieb)		Kgs	Grille / Finger guards / Schutzgitter	Plan / Drawing / Zeichnung
									tR C°	tR F°			
P38-A2	VREV8 350A	200 - 277	50/60	134	0,61	3485	2051	1705	-20 / +60	-4 / 140	4	21419	1
P38-A3	VREV8 350V	200 - 277	50/60	146	0,66	3540	2083	1700	-20 / +60	-4 / 140	4	21419	1
P38-A8	VGRV8 350A	200 - 277	50/60	137	0,62	3375	1986	1715	-20 / +60	-4 / 140	4		2
P38-A9	VGRV8 350V	200 - 277	50/60	151	0,69	3440	2024	1710	-20 / +60	-4 / 140	4		2
P38-B3	VPRV8 350V	200 - 277	50/60	151	0,69	3440	2024	1710	-20 / +60	-4 / 140	4		3
P38-B6	VGVV8 350A	200 - 277	50/60	137	0,62	3375	1986	1715	-20 / +60	-4 / 140	4,5		4
P38-B9	VGCV8 350A	200 - 277	50/60	137	0,62	3375	1986	1715	-20 / +60	-4 / 140	4,5		5

Dimensions / Dimensions / Masse :

1

