



Roulements à billes
Bobinage Classe F
Protection IP54 selon EN60034-5 à vérifier selon position et installation
Equilibrage G6.3
Rotor électrozingué
Hélice peinte noire

Ball bearings
F Class winding
IP54 protection according to EN60034-5 to be checked according to position and installation
Balancing G6.3
Electrolytic galvanized rotor
Black painted impeller

Kugellager
Cl.F Wicklung
IP54 Schutz gemäß EN60034-5 je nach Installation zu prüfen
Auswuchtgüte G6.3
Elektroverzinkte Rotor
Schwarz beschichtet Laufrad

Données techniques / Technical data / Technische Daten

Alimentation / Power supply / Strom
230V 50/60Hz

U Pilotage / Control /
Steuerung


2V

4V

6V

8V


10V

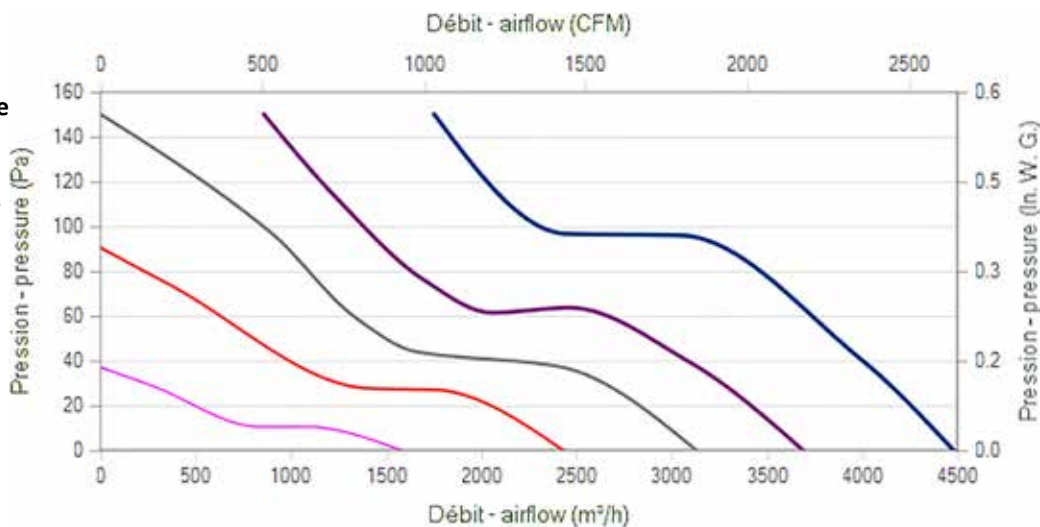



Modèle / Type / Typ		U V	f Hz	P Wa	IN A	m3/h	CFM	n RPM	T° max (Utilisation / Ope- rating / Betrieb)		Kgs	Grille / Finger guards / Schutzgitter	Plan / Drawing / Zeichnung
									tR C°	tR F°			
P38-A4	VREV8 400A	200 - 277	50/60	170	0,77	4480	2637	1605	-20 / +60	-4 / 140	4	21420	1
P38-A5	VREV8 400V	200 - 277	50/60	192	0,86	4500	2648	1595	-20 / +60	-4 / 140	4	21420	1
P38-B0	VGRV8 400A	200 - 277	50/60	188	0,84	4310	2536	1600	-20 / +60	-4 / 140	4		2
P38-B1	VGRV8 400V	200 - 277	50/60	190	0,85	4280	2519	1615	-20 / +60	-4 / 140	4		2
P38-B4	VPRV8 400V	200 - 277	50/60	190	0,85	4280	2519	1615	-20 / +60	-4 / 140	4		3
P38-B7	VGVV8 400A	200 - 277	50/60	188	0,84	4310	2536	1600	-20 / +60	-4 / 140	4,5		4
P38-C0	VGCV8 400A	200 - 277	50/60	188	0,84	4310	2536	1600	-20 / +60	-4 / 140	4,5		5

Dimensions / Dimensions / Masse :



1

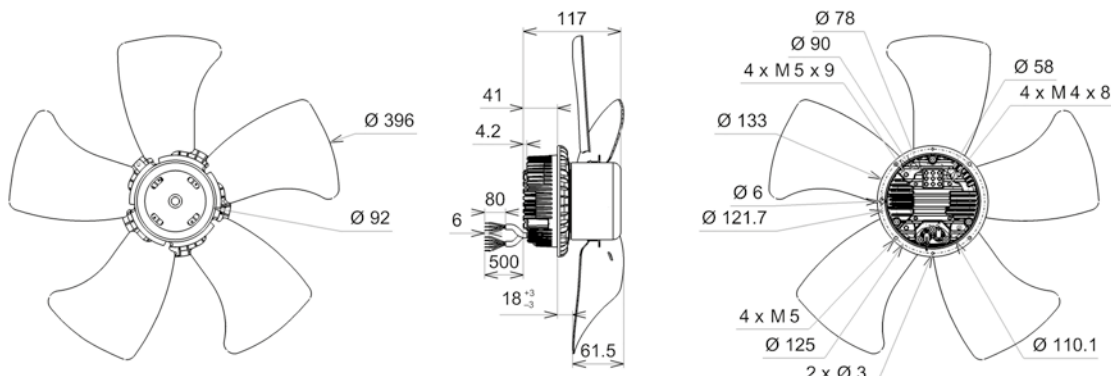



2

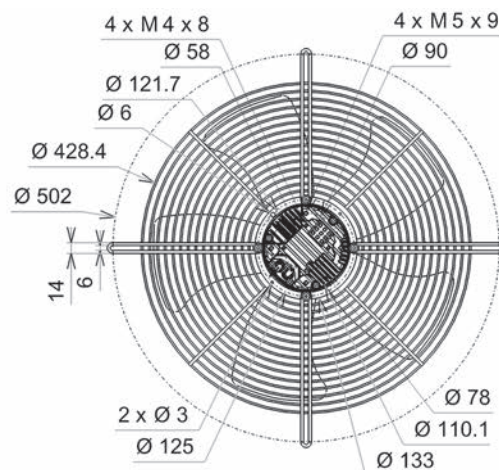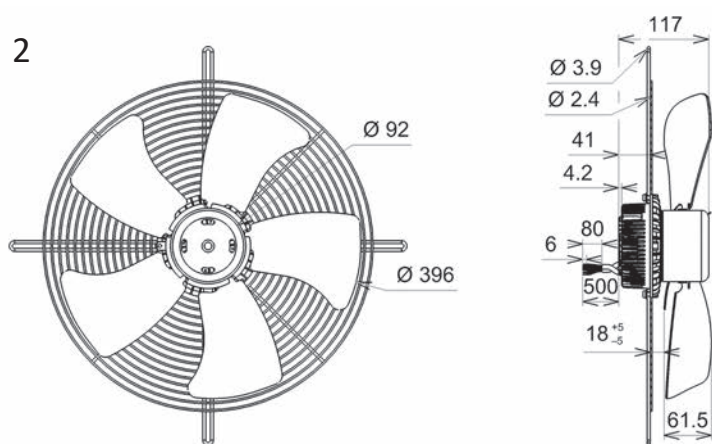



3

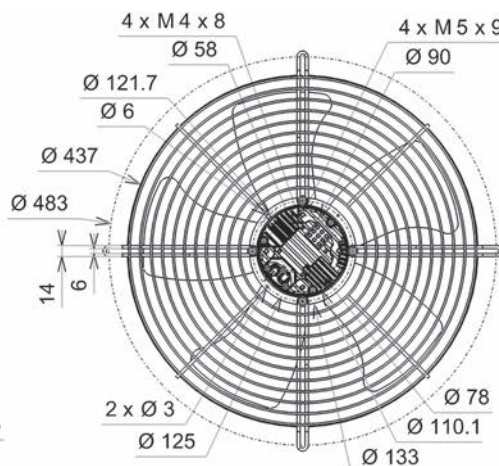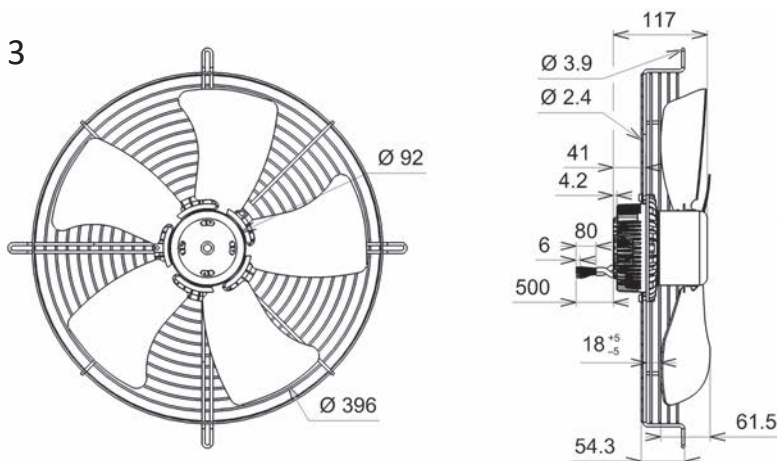

4

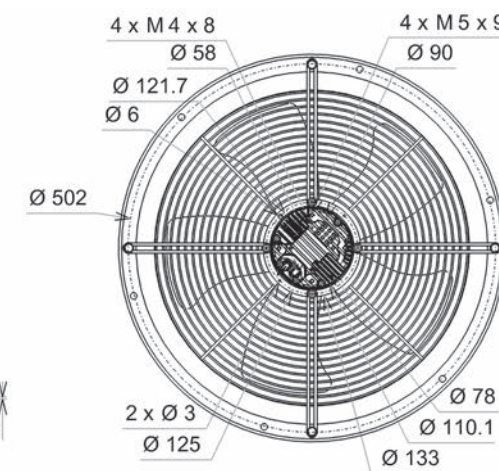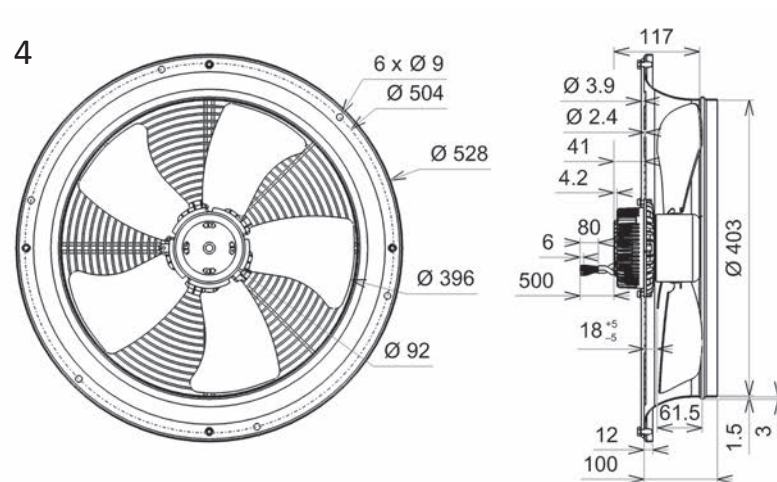

5

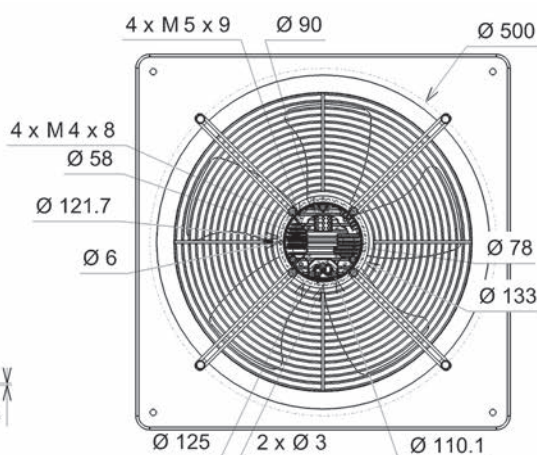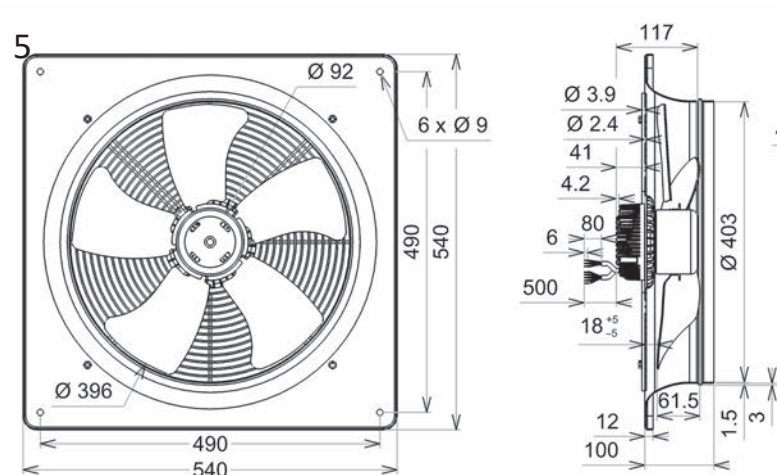

AXIAL EC