


"A12B_KF0" SERIES COSTECH FANS IP55

Description: Axial fan a.c. 120x120x38mm

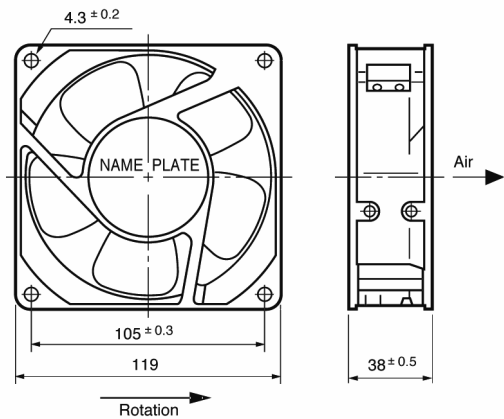

Casing material:

Impeller material

Protection degree:

Fixing system:

Motor protection:

Rated temperature range:

Electrical connection:

Weight:

die-casting aluminium painted black

black thermoplastic UL 94V-0

IP55, according to EN 60529 standard

by No 4 M4 screws




Impedance

Thermally only version 'H'

from -30°C to +60°C

male terminals 2.8x0.5 Type 110 or equivalent

0.615 kg

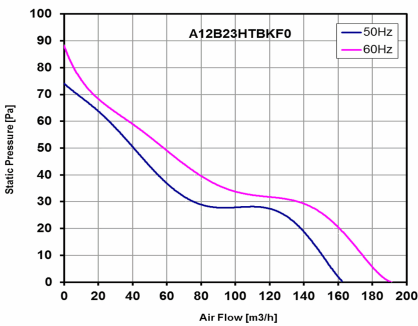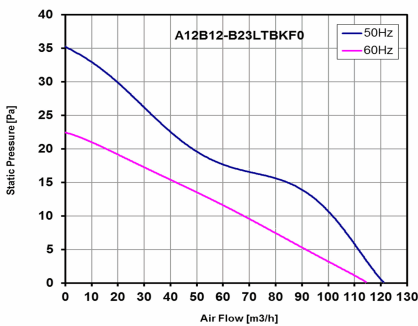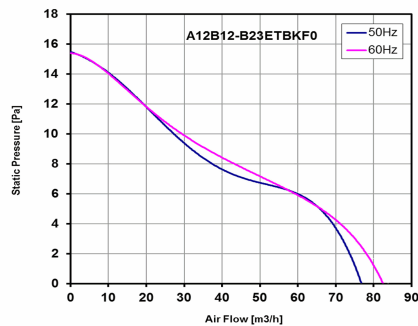

Model	Bearing	Voltage	Frequency	Rated Current	Rated Power	Max Air Flow**	Static Pressure	Noise	RPM	Approvals
		(V)	(Hz)	(A)	(W)	(m3/h)	(Pa)	[db(A)]	(rpm)	
A12B12ETBKF0	Ball	115 V a.c.	50/60	0.090/0.080	6.0/5.5	78/84	15/15	27.0/28.0	1,350/1,450	CE
A12B12LTBKF0	Ball	115 V a.c.	50/60	0.100/0.100	7.0/7.0	120/114	35/22	32.0/30.0	2,100/1,950	CE
A12B23ETBKF0	Ball	230 V a.c.	50/60	0.050/0.045	6.5/6.0	78/84	15/15	27.0/28.0	1,350/1,450	CE
A12B23HTBKF0	Ball	230 V a.c.	50/60	0.120/0.100	15/14	162/192	74/88	37.0/41.0	2,600/2,900	CE
A12B23LTBKF0	Ball	230 V a.c.	50/60	0.060/0.060	7.5/7.5	120/114	35/22	32.0/30.0	2,100/1,900	CE

data with uncertainty of 15%