

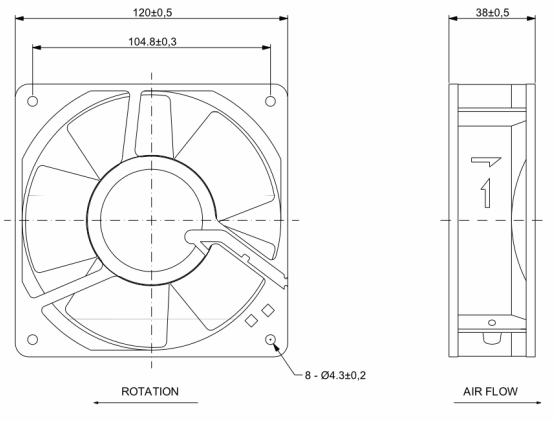


"A12BMT" SERIES COSTECH FANS

Description: **Axial fan a.c. 120x120x38mm**

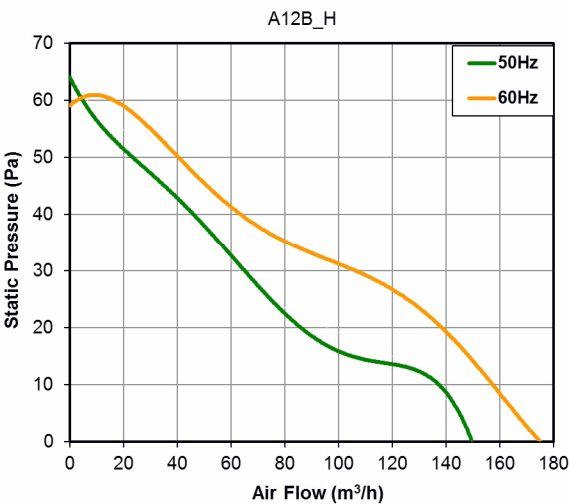

Casing material: Black wanned aluminum
Impeller material Metal
Protection degree: IP20, according to EN 60529 standard
Fixing system: by No 2 M4 screws
Insulation class: F
Motor protection: thermal
Storage temperature: from -40°C to +90°C
Rated temperature range: from -40°C to +90°C
Lifetime L10 at 40°C: 40,000 h
Electrical connection: N°2 male faston 2.8x0.8
Approvals: UL E223195
Weight: 0.55 kg

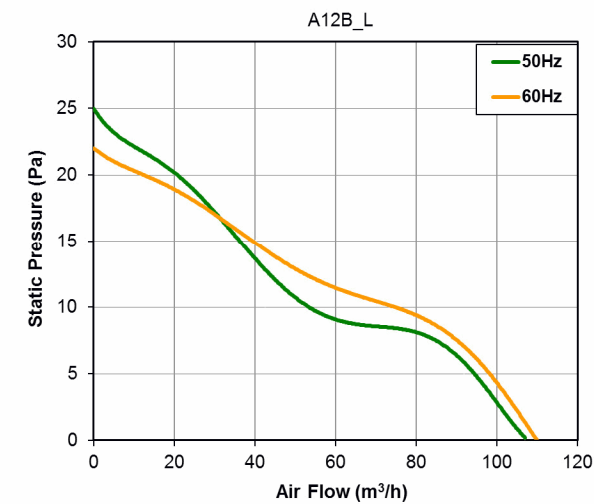

Model	Bearing	Voltage	Frequency	Rated Current	Rated Power	Max Air Flow**	Static Pressure	Noise	RPM	Approvals
		(V)	(Hz)	(A)	(W)	(m3/h)	(Pa)	[db(A)]	(rpm)	
A12B12HTBMT0	Ball	115 V a.c.	50/60	0.100/0.090	17/15	150/175	64/59	42.0/46.0	2,700/3,100	CE
A12B12LTBMT0	Ball	115 V a.c.	50/60	0.060/0.050	17/15	110/115	25/22	33.0/35.0	2,000/2,050	CE
A12B23HTBMT0	Ball	230 V a.c.	50/60	0.100/0.090	17/15	150/175	64/59	42.0/46.0	2,700/3,100	CE; cURus
A12B23LTBMT0	Ball	230 V a.c.	50/60	0.060/0.050	17/15	110/115	25/22	33.0/35.0	2,000/2,050	CE; cURus

All specifications, data and drawing are subject to change without notice and are approximate. Please refer to our terms of sales including our warranty and limited liabilities clauses.