

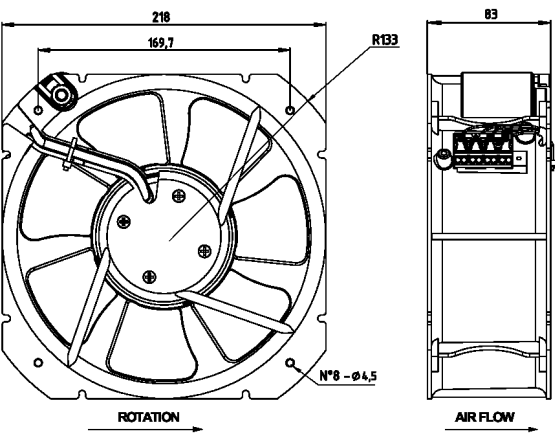
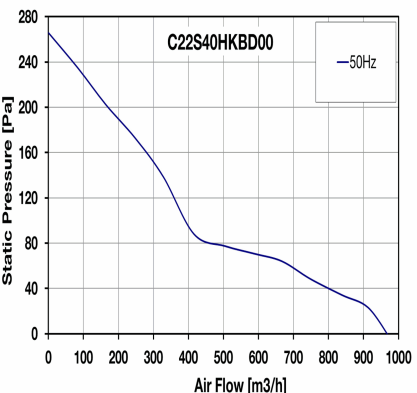


"C22SD" SERIES FANS

Description: Axial fan a.c. 218X218X83mm

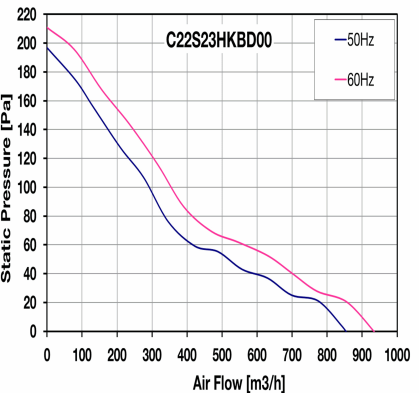

- Impeller material:** fibre reinforced plastic (PA66) blades
- Casing material:** aluminium alloy die casting UNI5076
- Fixing system:** No 4 holes Ø4.5
- Motor protection:** thermal (only for 115 and 230 Va.c. models)
- Rated temperature range:** from -20°C to +70°C
- Motor Lifetime L10 at 25°C (approx.):** 63,000 h
- Insulation class:** F
- Working class of capacitor:** class B for 115V model
class A for 230V model
- Electrical connection:** by screwless terminal block 2.5 mm² (20 - 14 AWG): 3 poles L-N-PE for 115/230Va.c. models; 4 poles L1-L2-L3-PE for 400Va.c. models
- Weight:** 1,9 kg

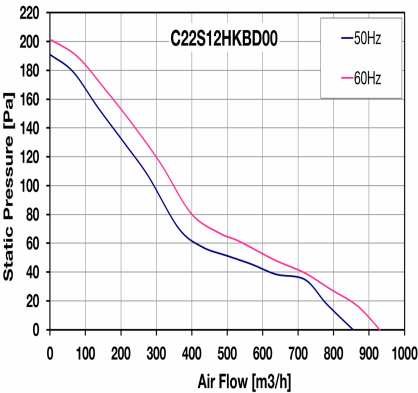

Model	Bearing	Voltage	Frequency	Rated Current	Rated Power	Max Air Flow	Static Pressure	Noise	RPM	Approvals
		(V)	(Hz)	(A)	(W)	(m3/h)	(Pa)	[db(A)]	(rpm)	
C22S12HKBD00	Ball	115 V a.c.	50/60	0.79/0.83	79/96	855/930	190/201	64.6/67.4	2,490/2,760	CE;
C22S23HKBD00	Ball	230 V a.c.	50/60	0.343/0.411	78/94	855/930	197/211	65.0/68.0	2,490/2,750	CE;
C22S40HKBD00	Ball	400 V 3 ~	50	0.280	174	970	265	61.0	2,770	CE;

data with uncertainty of 15%