

"CLG-L" LED LAMP

Description: **Led Lamp for enclosures**



Type of material:

casing in PC/ABS and diffuser in transparent polycarbonate

Appliance class:

class II

Electrical connection:

bipolar cable L= 1800mm with terminal bushing

Protection degree:

IP20

Storage temperature:

from -10°C to +70°C

Operating temperature:

from -0°C to +50°C

Lifetime L10 at 40°C:

20,000h

Lum. Flux

700 lm

Ballast:

electronic incorporated


Switch:

ON/OFF

Approvals:

CE

technical drawing

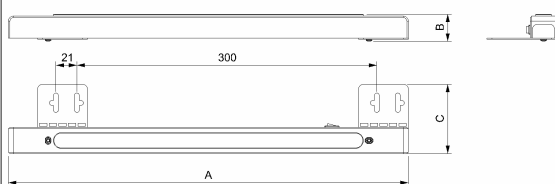

Model	Rated Voltage	Frequency	Watt	Dimensions (mm)			Weight	Led	
	(V)	(Hz)	(W)	A	B	C	(Kg)	N.	Color
CLG-L307	115-240 V a.c.	50/60	7.5	400	28	70	0.200	12	White