



Axial fans provide forced-air cooling solution to temperature-sensitive applications. Compact fans with AC shaded pole or capacitor and DC brushless motor are designed for ventilation and spot cooling of internal machinery components, especially in areas in confined spaces. Available also versions tested to withstand harsh environmental conditions (IP55, IP68, all metal and HTR fans).

Technical data		
APPROVALS		
Approvals	CE; cURus	
PERFORMANCE		
Max Airflow	14	m³/h
	8	CFM
Max Static Pressure	73	Pa
	0.29	in H2O
RPM	7800	RPM
ELECTRICAL DATA		
Rated Voltage	12	V d.c.
Rated Current	0.11	A
Rated Power	1.3	W
Operating Voltage	10.8-13.2	V d.c.
Starting Voltage	9	V d.c.
Insulation Class	A	
Motor Protection	Electronically Protected	
Bearing	Ball Bearing	
GENERIC DATA		
Casing Material	Plastic UL94-V0	
Airflow Direction	Pressing	
Electrical Connection	Wire	
Life Expectancy	70000	h at 40 °C

Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.




Technical data		
Noise	35.3	dB(A)
Cable Length	330	mm
Fixing System	Screws	
ENVIRONMENTAL AND THERMAL DATA		
IP Protection Degree	IP20	
Operating Temperature	-10÷70	°C
Storage Temperature	-40÷70	°C

Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.



Technical drawing mm (in)

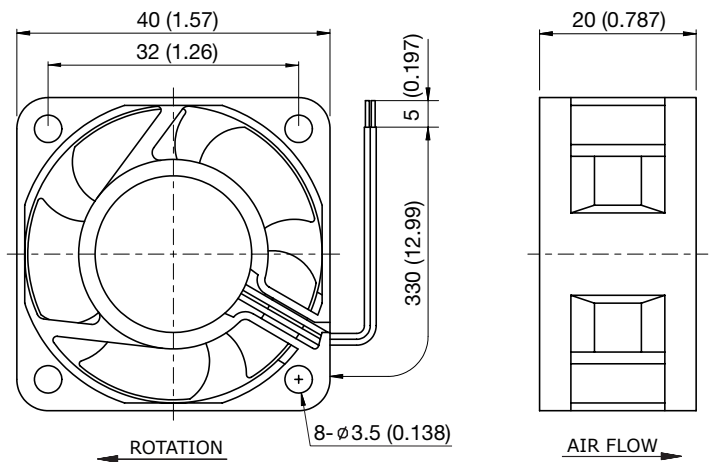

Air Performance

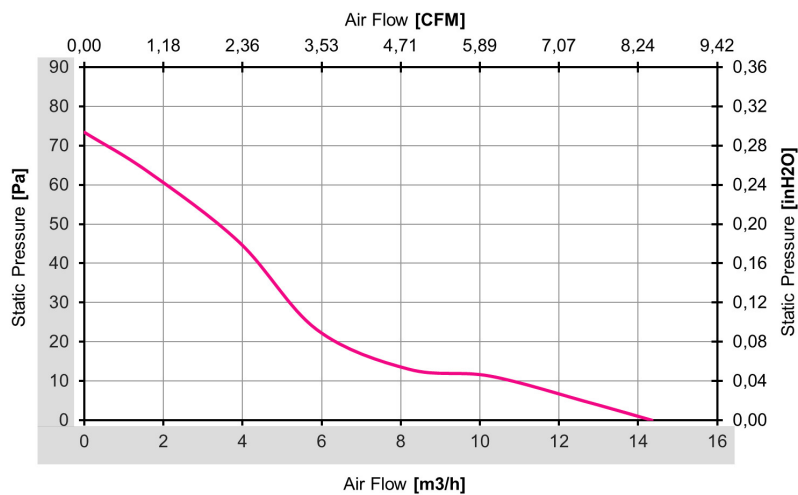


Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.

