



COSTECH FAN

Description: **d.c. axial fan 80x80x25 mm**

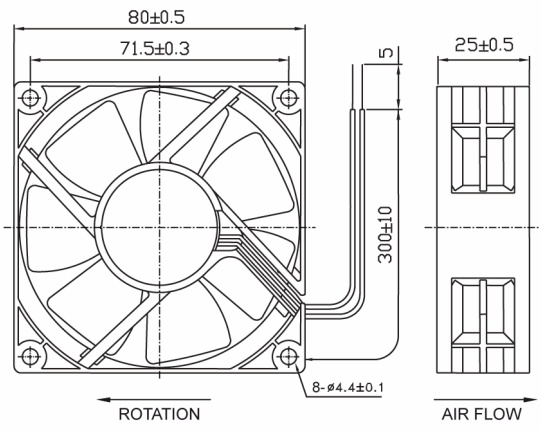

Casing material:	Black fibreglass reinforced plastic (PBT) UL 94V-0
Impeller material	Black fibreglass reinforced plastic (PBT) UL 94V-0
Protection degree:	IP20, according to EN 60529 standard
Fixing system:	by 2x4 holes Ø4.4mm
Motor protection:	by IC
Storage temperature:	from -40°C to +70°C
Rated temperature range:	from -10°C to +70°C
Lifetime L10 at 40°C:	70,000 h
Electrical connection:	2 lead wires 24AWG UL 1007, length 300mm
Approvals:	UL E223195
Weight:	86g

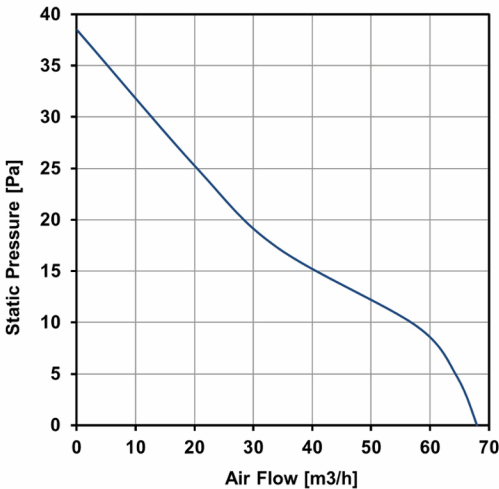

Model	Bearing	Voltage	Rated Current	Rated Power	Max Air Flow	Static Pressure	Noise	RPM	Approvals
		(V)	(A)	(W)	(m3/h)	(Pa)	[db(A)]	(rpm)	
D08A05HWBA00	Ball	24 V d.c.	0.160	3.84	68	38	33.4	3,000	CE; UR

data with uncertainty of 10%