


"D09AZ" SERIES COSTECH FANS

Description: d.c. axial fan 92x92x25 mm

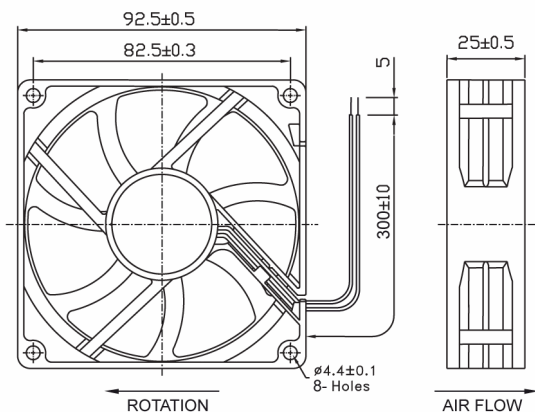

Casing material:

Black fibreglass reinforced plastic (PBT)
UL 94V-0

Impeller material:

Black fibreglass reinforced plastic (PBT)
UL 94V-0

Protection degree:

IP20, according to EN 60529 standard

Fixing system:

by No 4x4 holes Ø 4.4 mm

Motor protection:

impedance and IC depending on the model

Insulation class:

A

Storage temperature:

from -40°C to +70°C

Rated temperature range:

from -10°C to +70°C

Lifetime L10 at 40°C:

70,000 h ball bearing
30,000 h sleeve bearing

Electrical connection:






2 leads 24 AWG UL 1007, 300 mm long

Weight:

92 g

Approvals:

CE; UL E223195

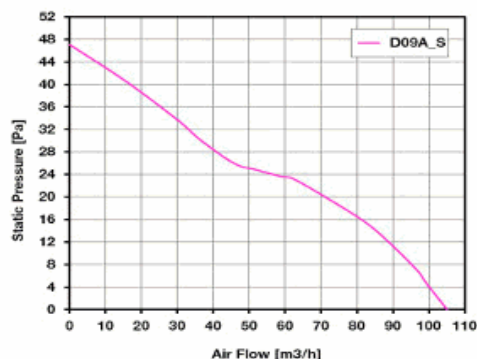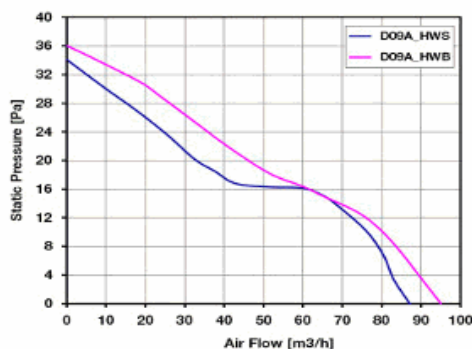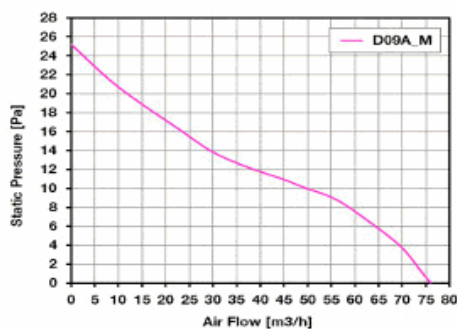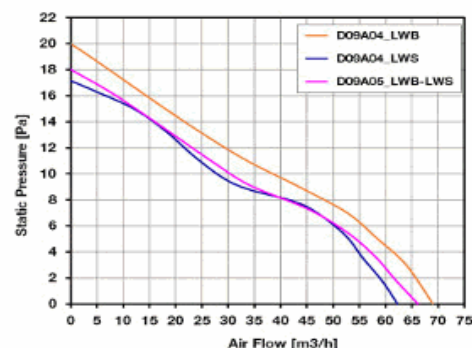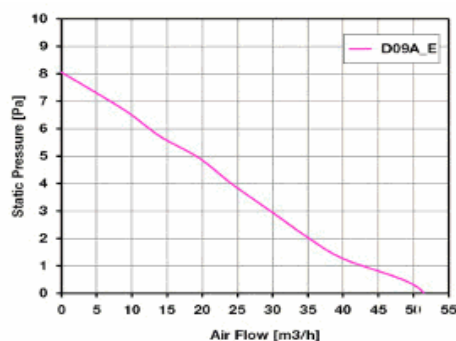

ВЕНТИЛЯТОРЫ.RU

 МАГАЗИН ПРОМЫШЛЕННЫХ ВЕНТИЛЯТОРОВ

Model	Bearing	Voltage	Rated Current	Rated Power	Max Air Flow**	Static Pressure	Noise	RPM	Approvals
		(V)	(A)	(W)	(m3/h)	(Pa)	[db(A)]	(rpm)	
D09A04EWBZ00	Ball	12 V d.c.	0.090	1.08	51	8	19.1	1,600	CE; cURus
D09A04HWPBZ00	Ball	12 V d.c.	0.250	3.0	95	36	37.5	2,900	CE; cURus
D09A04HWSZ00	Sleeve	12 V d.c.	0.250	3.0	87	34	35.4	2,700	CE; cURus
D09A04LWPBZ00	Ball	12 V d.c.	0.130	1.56	69	20	29.2	2,100	CE; cURus
D09A04LWSZ00	Sleeve	12 V d.c.	0.130	1.56	62	17	25.9	2,000	CE; cURus
D09A04MWPBZ00	Ball	12 V d.c.	0.170	2.0	76	25	31.2	2,400	CE; cURus
D09A04MWSZ00	Sleeve	12 V d.c.	0.170	2.0	76	25	31.2	2,400	CE; cURus
D09A04SWPBZ00	Ball	12 V d.c.	0.390	4.7	105	47	39.4	3,300	CE; cURus
D09A04SWSZ00	Sleeve	12 V d.c.	0.390	4.7	105	47	42.2	3,300	CE; cURus
D09A05HWPBZ00	Ball	24 V d.c.	0.150	3.6	95	36	37.5	2,900	CE; cURus
D09A05HWSZ00	Sleeve	24 V d.c.	0.150	3.6	87	34	35.4	2,700	CE; cURus
D09A05LWPBZ00	Ball	24 V d.c.	0.080	1.9	66	18	28.7	2,000	CE; cURus
D09A05LWSZ00	Sleeve	24 V d.c.	0.080	1.9	66	18	28.7	2,000	CE; cURus
D09A05MWPBZ00	Ball	24 V d.c.	0.121	2.9	76	25	31.2	2,400	CE; cURus
D09A05MWSZ00	Sleeve	24 V d.c.	0.121	2.9	76	25	31.2	2,400	CE; cURus
D09A05SWPBZ00	Ball	24 V d.c.	0.210	5.0	105	47	42.2	3,300	CE; cURus
D09A05SWSZ00	Sleeve	24 V d.c.	0.210	5.0	105	47	42.2	3,300	CE; cURus

All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.

E-mail: zakaz@ventilatorry.ru