



"D12A04SWSZ00" COSTECH FAN

Description: **Axial d.c. 120x120x25 mm**

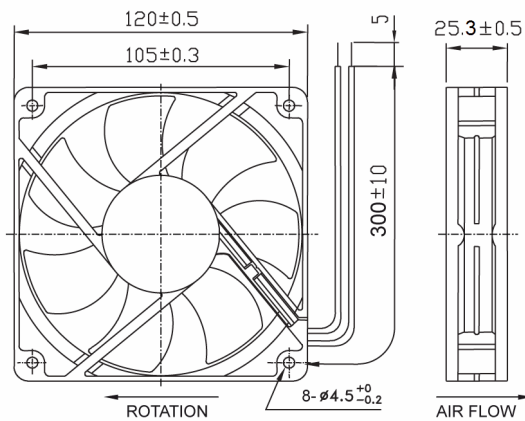

Casing material:	Black fibreglass reinforced plastic (PBT) UL 94V-0
Impeller material	Black fibreglass reinforced plastic (PBT) UL 94V-0
Protection degree:	IP20, according to EN 60529 standard
Fixing system:	by 4x2 holes Ø4.5mm
Motor protection:	IC
Storage temperature:	from -40°C to +70°C
Rated temperature range:	from -10°C to +70°C
Lifetime L10 at 40°C:	30,000h
Electrical connection:	2 leads 24AWG, 300 mm long
Weight:	156 g
Approvals:	CE; UL E223195

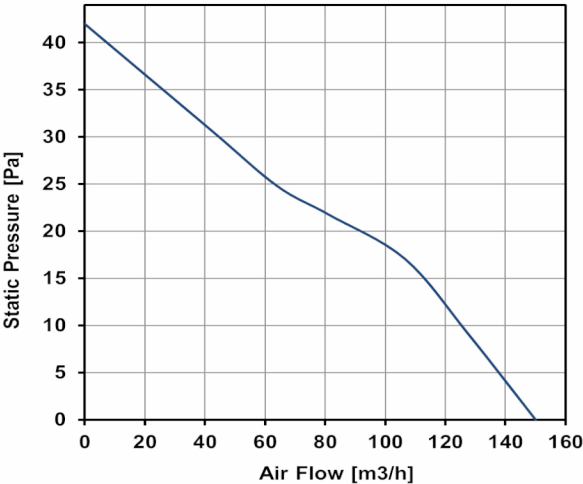

Model	Bearing	Voltage	Rated Current	Rated Power	Max Air Flow	Static Pressure	Noise	RPM	Approvals
		(V)	(A)	(W)	(m3/h)	(Pa)	[db(A)]	(rpm)	
D12A04SWSZ00	Sleeve	12 V d.c.	0.50	6.0	150	42	43.9	2,500	CE; cURus

data with uncertainty of 10%