



"D12BZ" SERIES COSTECH FANS

Description: **Axial c.c. 120x120x38 mm**

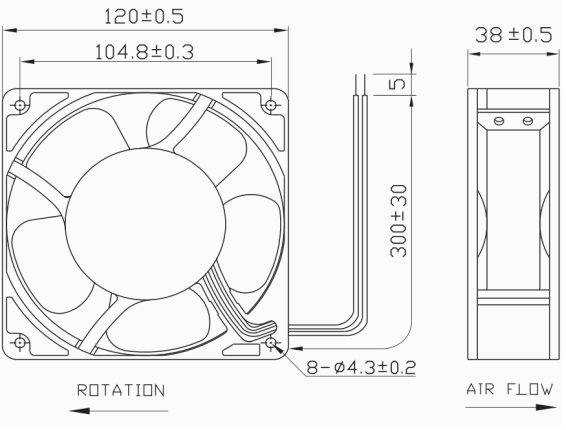

- Casing material:** Black fibreglass reinforced plastic (PBT) UL 94V-0
- Impeller material:** Black fibreglass reinforced plastic (PBT) UL 94V-0
- Protection degree:** IP52, according to EN 60529 standard
- Fixing system:** 4 holes Ø4.3 mm
- Motor protection:** IC
- Storage temperature:** from -40°C to +70°C
- Rated temperature range:** from -10°C to +70°C
- Lifetime L10 at 40°C:** 70,000 h ball bearing
30,000 h sleeve bearing
- Electrical connection:** 2 leads 24AWG UL 1007, 300 mm long
- Weight:** 235 g
- Approvals:** CE; UL E223195

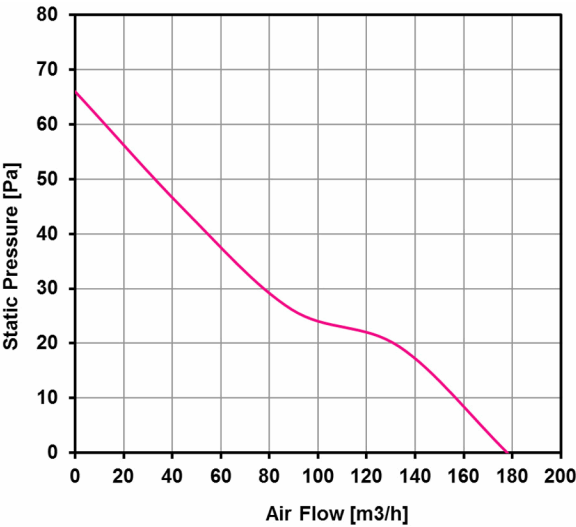

Model	Bearing	Voltage	Rated Current	Rated Power	Max Air Flow**	Static Pressure	Noise	RPM	Approvals
		(V)	(A)	(W)	(m3/h)	(Pa)	[db(A)]	(rpm)	
D12B05HWBZ00	Ball	24 V d.c.	0.320	7.68	179	66	46.7	2,800	CE; cURus
D12B05HWSZ00	Sleeve	24 V d.c.	0.320	7.68	179	66	46.7	2,800	CE; cURus

data with uncertainty of 15%