



"D17CA" SERIES COSTECH FANS

Description: Axial c.c. 172x150x51 mm

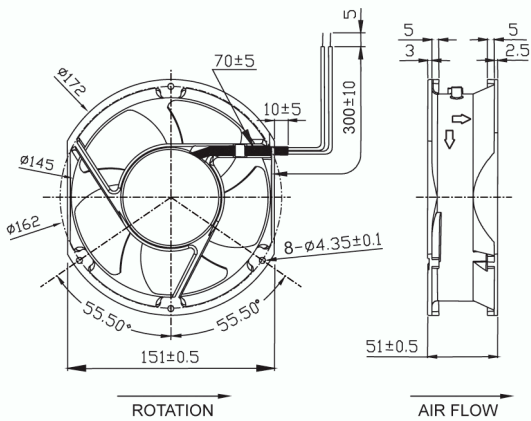

- Casing material: aluminum alloy
Impeller material: UL 94V-0 glass filled polyester (PBT)
Protection degree: IP20, according to EN 60529 standard
Fixing system: by No. 4 M4 screws
Motor protection: IC
Storage temperature: from -40°C to +70°C
Rated temperature range: from -10°C to +70°C
Lifetime L10 at 40°C: 70,000 h
Electrical connection: 2 leads 22AWG UL 1061, 300 mm long.
Approvals: UL E223195
Weight: 762g

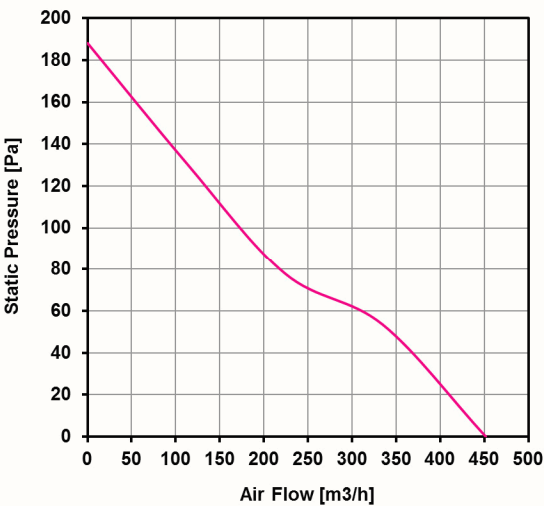

Model	Bearing	Voltage	Rated Current	Rated Power	Max Air Flow**	Static Pressure	Noise	RPM	Approvals
		(V)	(A)	(W)	(m3/h)	(Pa)	[db(A)]	(rpm)	
D17C05HWBA00	Ball	24 V d.c.	1.0	24	450	190	60.0	3,500	CE; cURus
D17C07HWBA00	Ball	48 V d.c.	0.50	24	450	190	58.8	3,500	CE; cURus

All specifications, data and drawing are subject to change without notice and are approximate. Please refer to our terms of sales including our warranty and limited liabilities clause