



"DC1GA" SERIES COSTECH FANS

Description: **Axial с.с. 120x120x31 mm**

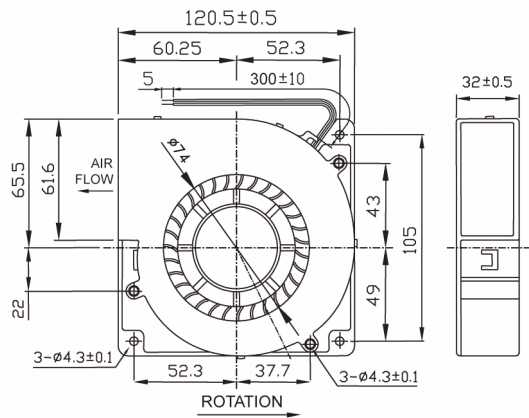

- Casing material:** Black fibreglass reinforced plastic (PBT) UL 94V-0
- Impeller material** Black fibreglass reinforced plastic (PBT) UL 94V-0
- Protection degree:** IP20, according to EN 60529 standard
- Fixing system:** by No. 4 M4 screws
- Motor protection:** IC
- Storage temperature:** from -40°C to +70°C
- Rated temperature range:** from -10°C to +70°C
- Lifetime L10 at 40°C:** 70,000 h at 40°C
- Electrical connection:** 2 leads 24AWG UL 1007, 300 mm long.
- Weight:** 251g
- Approvals:** UL E223195

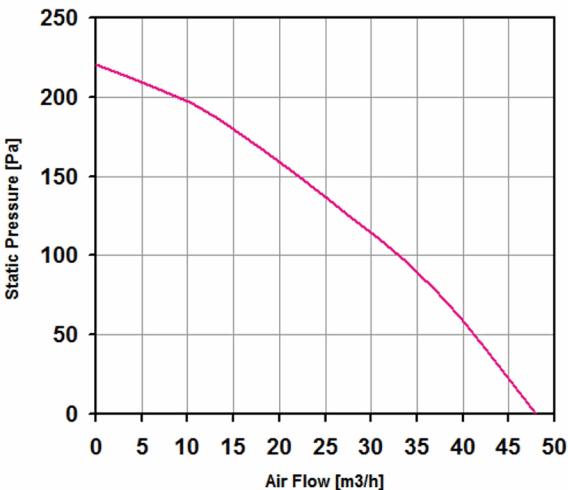

Model	Bearing	Voltage	Rated Current	Rated Power	Max Air Flow**	Static Pressure	Noise	RPM	Approvals
		(V)	(A)	(W)	(m3/h)	(Pa)	[db(A)]	(rpm)	
DC1G05MWBA01	Ball	24 V d.c.	0.390	9.4	48	220	49.0	2,300	CE; cURus

All specifications, data and drawing are subject to change without notice and are approximate. Please refer to our terms of sales including our warranty and limited liabilities clause