


"E08BL" SERIES COSTECH FANS

Description: **EC Axial fan 80X80x38mm**

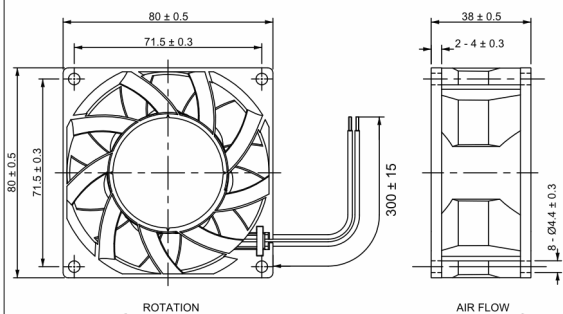

Casing material:

Impeller material

Protection degree:

Fixing system:

Motor protection:

Storage temperature:

Rated temperature range:

Lifetime L10 at 25°C:

Electrical connection:

Approvals:

Weight:

Thermoplastic in black color, UL 94 V-0

Thermoplastic in black color, UL 94 V-0

IP20, according to EN 60529 standard

by No 4 M4 screws

Impedance

From -40°C to +80°C



From -10°C to +70°C

50,000 h

2 leads 24 AWG UL1430

CE

0.270 kg

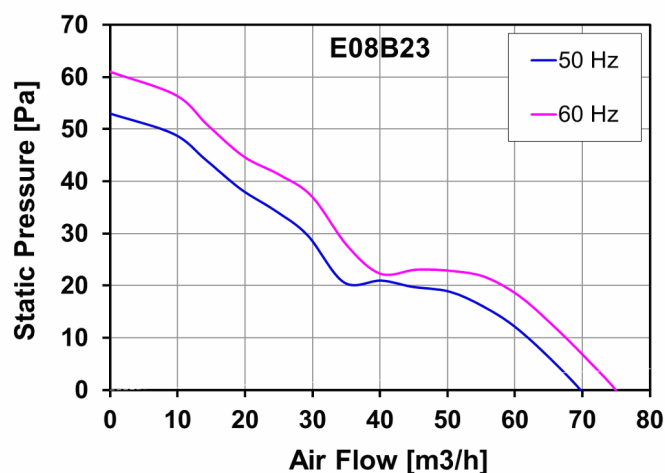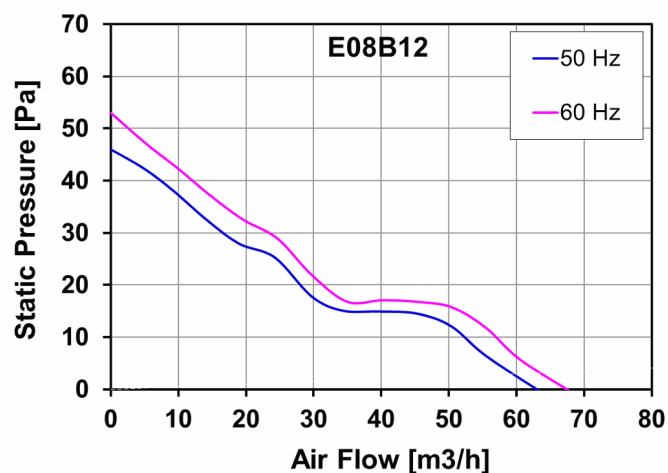

ВЕНТИЛЯТОРЫ.RU

 МАГАЗИН ПРОМЫШЛЕННЫХ ВЕНТИЛЯТОРОВ

Model	Bearing	Voltage	Frequency	Rated Current	Rated Power	Max Air Flow**	Static Pressure	Noise	RPM	Approvals
		(V)	(Hz)	(A)	(W)	(m3/h)	(Pa)	[db(A)]	(rpm)	
E08B12HWBL00	Ball	115 V a.c.	50/60	0.06/0.06	5.0/5.0	64/68	46/53	35/37	2,800/3,000	CE
E08B23HWBL00	Ball	230 V a.c.	50/60	0.05/0.05	5.0/5.0	68/73	53/61	37/39	3,000/3,200	CE

data with uncertainty of 15% (T) terminals (W) wires

All specifications, data and drawing are subject to change without notice and are approximate. Please refer to our terms of sales including our warranty and limited liabilities clauses.