


"E12BL" SERIES COSTECH FANS

Description: **EC Axial fan 120X120x38mm**

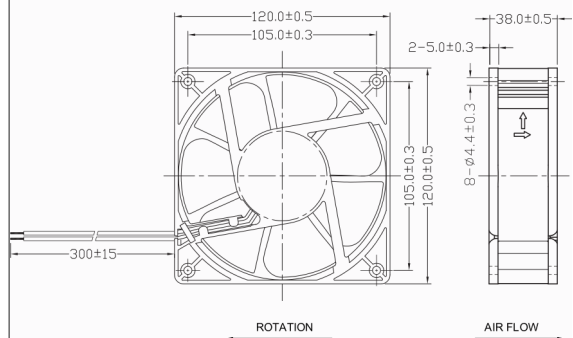

Casing material:

Impeller material

Protection degree:

Fixing system:

Motor protection:

Storage temperature:

Rated temperature range:

Lifetime L10 at 40°C:

Electrical connection:

Approvals:

Weight:

Thermoplastic in black color, UL 94 V-0

Thermoplastic in black color, UL 94 V-0

IP20, according to EN 60529 standard

by No 4 M4 screws

Impedance

from -40°C to +75°C




from -30°C to +70°C

ball bearing 50,000 h

2 leads 24 AWG UL1430

CE

0.270 kg

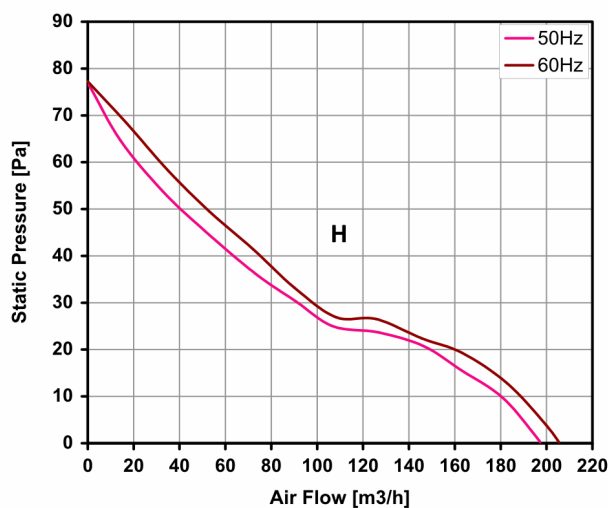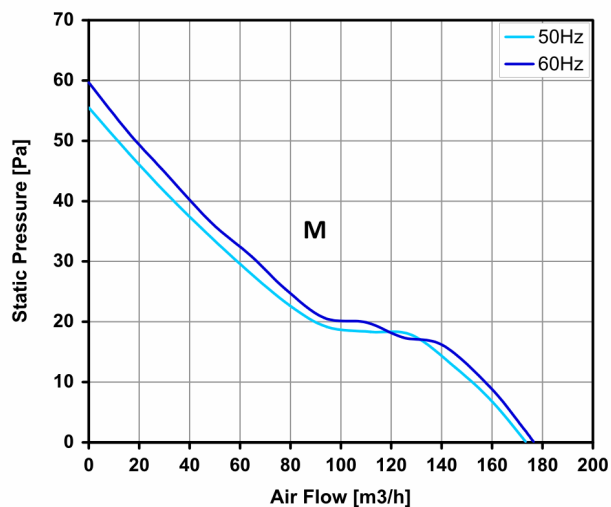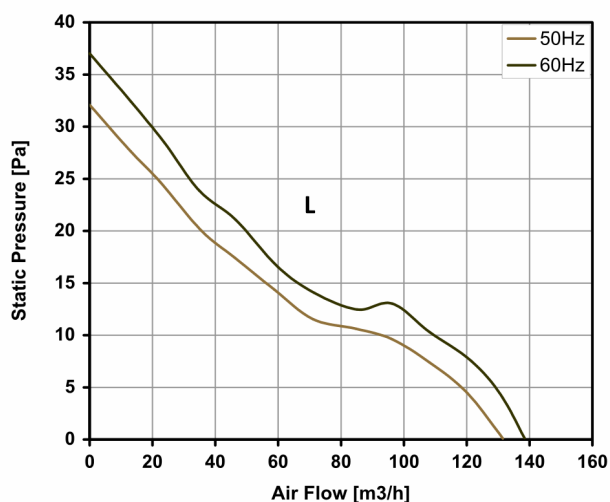

ВЕНТИЛЯТОРЫ.RU

 МАГАЗИН ПРОМЫШЛЕННЫХ ВЕНТИЛЯТОРОВ

Model	Bearing	Voltage	Frequency	Rated Current	Rated Power	Max Air Flow**	Static Pressure	Noise	RPM	Approvals
		(V)	(Hz)	(A)	(W)	(m3/h)	(Pa)	[db(A)]	(rpm)	
E12B23HWBL00	Ball	230 V a.c.	50/60	0.05/0.05	6.0/6.0	198/206	79/77	45.0/46.8	3,000/3,100	CE
E12B23LWBL00	Ball	230 V a.c.	50/60	0.03/0.03	2.5/2.5	132/138	32/37	34.0/35.7	2,000/2,100	CE
E12B23MWBL00	Ball	230 V a.c.	50/60	0.04/0.04	4.0/4.0	169/176	55/58	40.0/41.8	2,500/2,700	CE

data with uncertainty of 15%

All specifications, data and drawing are subject to change without notice and are approximate. Please refer to our terms of sales including our warranty and limited liabilities clauses.