



"FF12D24UNR" FAN FILTER

Description: Fan Filter 24 Vd.c.

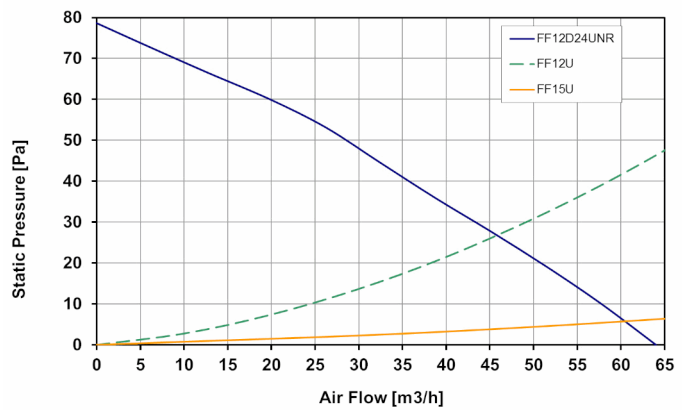

| | |
|---------------------------------|--|
| Type of material: | PC/ABS Alloy, PA 66 GF13 HSL for elastic clips |
| Standard color: | RAL 7035, other colors on request |
| Protection degree: | IP54, according to EN 60529 Std Type 12 according to UL 508 Std |
| Fixing system: | by elastic clips |
| Plate thickness: | from 1.3 mm to 3.2 mm |
| Operating temperature: | from -10°C to +55°C |
| Storage temperature: | from -40°C to +70°C |
| Lifetime L10 at 25°C: | 100,000 h |
| Motor protection: | IC Protected |
| Electrical connection: | by screwless terminal block 2 poles 2.5 mm ² (20 - 14 AWG) |
| Appliance class: | class III |
| Type of filter media: | thermo-linked progressive structure synthetic fibre |
| Filtering class: | class G3, according to EN 779 |
| Degree of separation: | 85% - DIN 24185 |
| Dust retention capacity: | 600 g/m ² |
| Note: | filter media is washable about 10 times |
| Weight: | 0.5 Kg |
| Approvals: | CE; UL E237844; CSA |

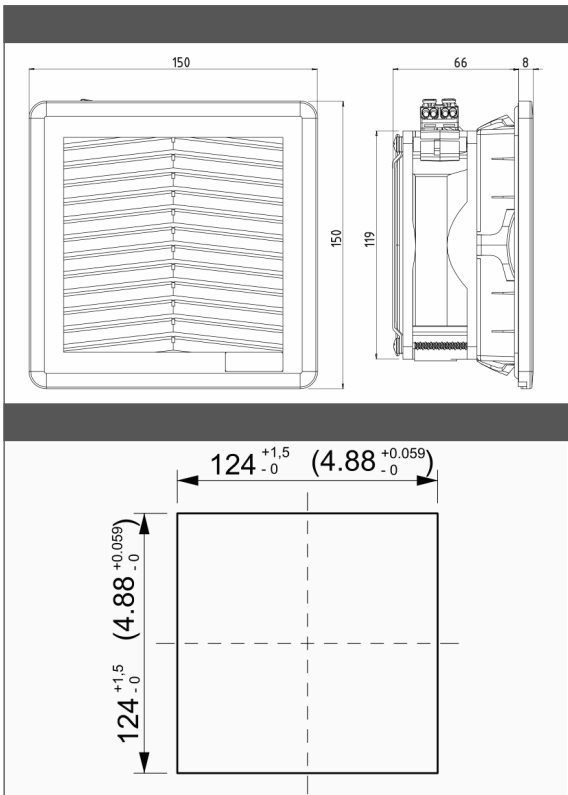

| Model | Voltage | Frequency | Rated Current | Rated Power | Max Air Flow | Static Pressure | Fan Noise | Rated Temp. Range | Approvals |
|------------|-----------|-----------|---------------|-------------|---------------------|-----------------|-----------|-------------------|-----------------------|
| | (V) | (Hz) | (A) | (W) | (m ³ /h) | (Pa) | [db(A)] | (°C) | |
| FF12D24UNR | 24 V d.c. | - | 0.310 | 7.4 | 64 | 79 | 42.5 | -10 ÷ +55 | CE; UR; cCSAus; cULus |

data with uncertainty of 15%