



"FF15AN2" SERIES FAN FILTERS

Description: Fan Filters 115/230 Va.c.



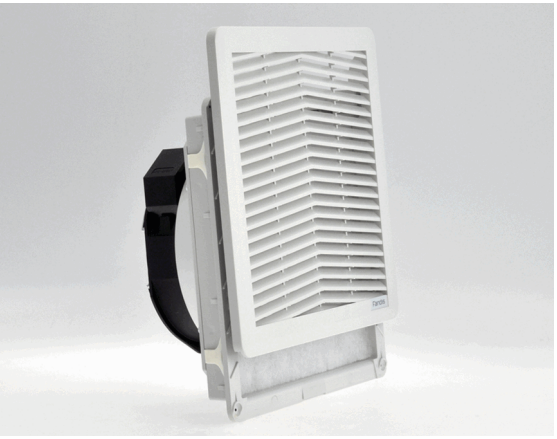


- Type of material: PC/ABS Alloy, PA 66 GF13 HSL for elastic clips
- Standard color: RAL 7035, other colors on request
- Protection degree: IP54, according to EN 60529 Std
- Fixing system: by elastic clips
- Plate thickness: from 1.3 mm to 3.7 mm (up to 4 mm with cut-out max tolerance)
- Storage temperature: from -40°C to +70°C
- Motor Lifetime L10 at 25°C: 50,000 h
- Motor protection: thermal
- Electrical connection: by screwless terminal block 3 poles L-N-PE, 2.5 mm² (20 - 14 AWG)
- Earth connection: by PE pole
- Appliance class: A
- Type of filter media: thermo-linked progressive structure synthetic fibre
- Filtering class: class G3, according to EN 779
- Degree of separation: 85% - DIN 24185
- Dust retention capacity: 600 g/m²
- Note: filter media is washable about 10 times
- Weight: 1.4 Kg
- Approvals: CE; UL E237844; CSA

technical drawing (standard flow)

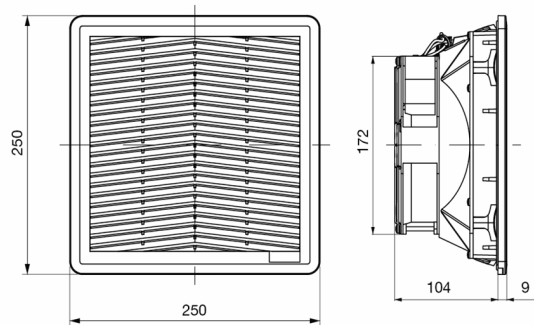

mounting cut-out

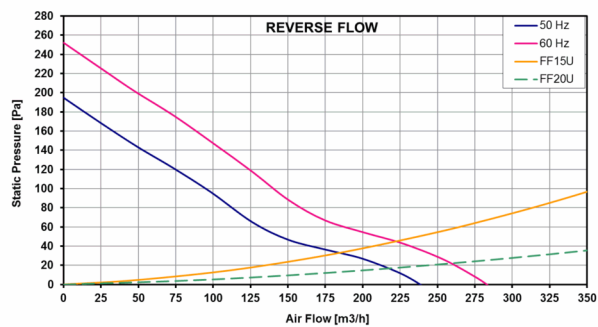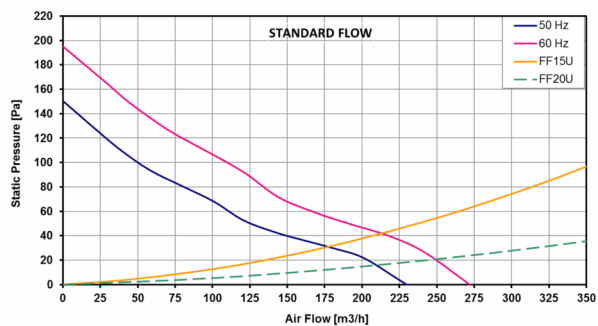

Model	Voltage	Frequency	Rated Current	Rated Power	Max Air Flow**	Static Pressure	Fan Noise	Rated Temp. Range	Approvals
	(V)	(Hz)	(A)	(W)	(m³/h)	(Pa)	[db(A)]	(°C)	
FF15A115UN2	115 V a.c.	50/60	0.360/0.361	39/41	230/270	150/195	52.0/56.0	-10 ÷ +55	CE; cURus; cCSAus
FF15A115UNR2	115 V a.c.	50/60	0.358/0.359	39/41	238/283	195/252	52.0/56.0	-10 ÷ +55	CE; cURus; cCSAus
FF15A230UN2	230 V a.c.	50/60	0.185/0.194	42/45	230/272	150/195	52.0/56.0	-10 ÷ +55	CE; cURus; cCSAus
FF15A230UNR2	230 V a.c.	50/60	0.185/0.192	42/45	238/283	195/252	52.0/56.0	-10 ÷ +55	CE; cURus; cCSAus

data with uncertainty of 15%

All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.