



"FF20A400" SERIES FAN FILTERS


Description: Fan Filters 400 Va.c.

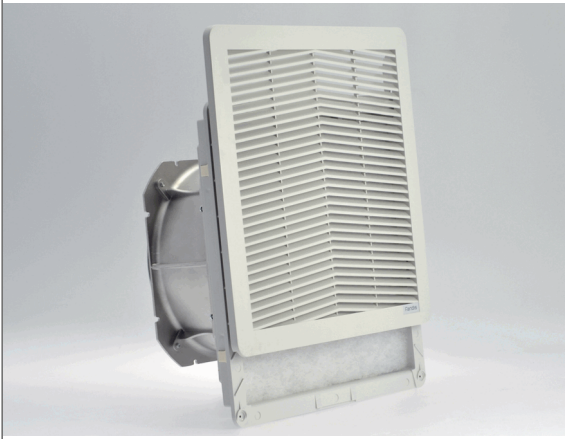


technical drawing

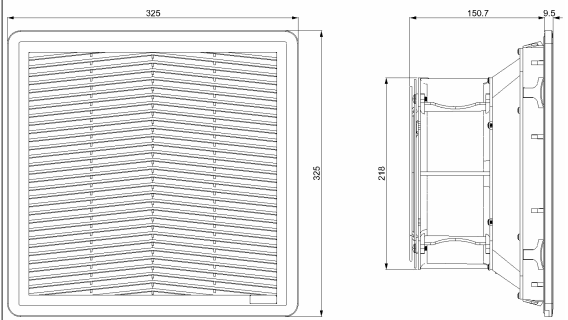

mounting cut-out

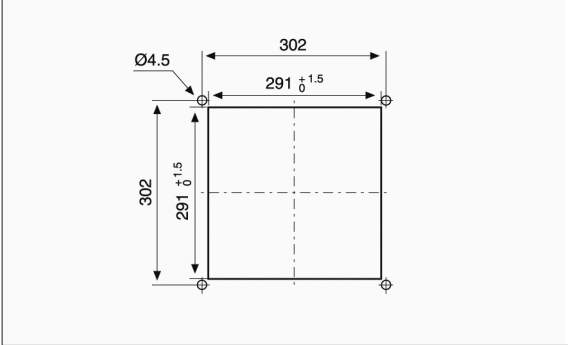

- Type of material: PC/ABS Alloy, PA 66 GF13 HSL for elastic clips
- Standard color: RAL 7035, other colors on request
- Protection degree: IP54, according to EN 60529 Std
- Fixing system: by elastic clips
- Plate thickness: from 1.3 mm to 3.7 mm (up to 4 mm with cut-out max tolerance)
- Motor Lifetime L10 at 25°C: 50,000 h
- Electrical connection: by screwless terminal block L1-L2-L3-PE 2.5 mm² (20 - 14 AWG)
- Earth connection: by PE pole
- Appliance class: class I
- Type of filter media: thermo-linked progressive structure synthetic fibre
- Filtering class: G3, according to EN 779
- Degree of separation: 85% - DIN 24185
- Dust retention capacity: 600 g/m²
- Note: filter media is washable about 10 times
- Weight: 3.6 kg

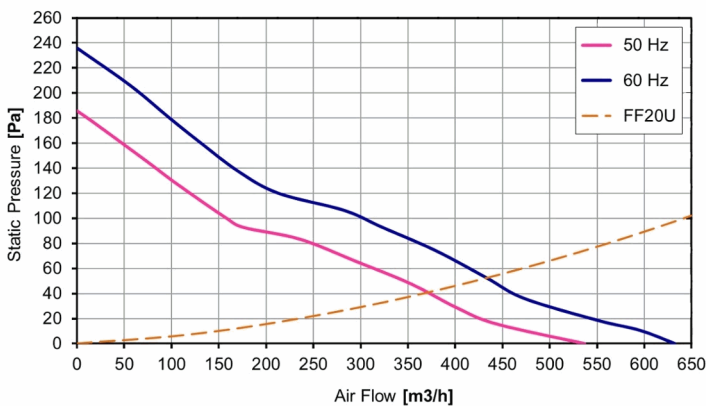

Model	Voltage	Frequency	Rated Current	Rated Power	Max Air Flow	Static Pressure	Fan Noise	Rated Temp. Range	Approvals
	(V)	(Hz)	(A)	(W)	(m3/h)	(Pa)	[db(A)]	(°C)	
FF20A400TUE	400 V 3 ~	50/60	0.260/0.230	99/124	537/632	186/236	64.1/67.8	-10 ÷ +60	CE

data with uncertainty of 15%