



"FF20GAA1" SERIES FAN FILTERS

Description: **Fan Filters 115/230 Va.c.**

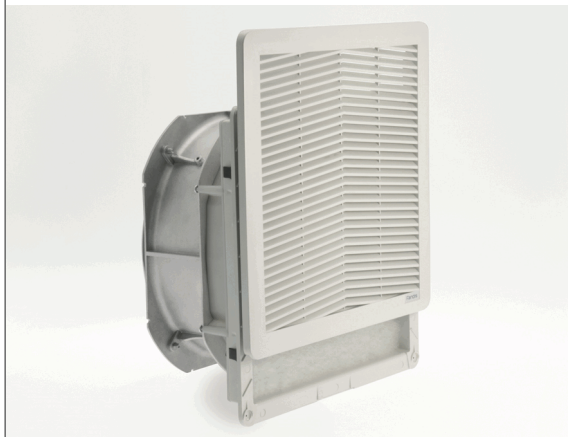


Type of material:	PC/ABS Alloy, PA 66 GF13 HSL for elastic clips
Standard color:	RAL 7035 - other colors on request
Protection degree:	IP51, according to EN 60529 Std Type 1 according to UL 508 Std
Fixing system:	by elastic clips
Plate thickness:	from 1.3 mm to 3.7 mm (up to 4 mm with cut-out max tolerance)
Motor Lifetime L10 at 25°C (approx.):	53,000/78,000 h for 115V 57,500/70,000 h for 230V
Working class of capacitor:	class B for 115V models class A for 230V models
Motor protection:	thermal
Electrical connection:	by screwless terminal block L-N-PE, 2.5 mm² (20 - 14 AWG)
Earth connection:	by PE pole
Appliance class:	class I
Type of filter media:	thermo-linked progressive structure synthetic fibre
Filtering class:	G2, according to EN 779
Degree of separation:	67% - DIN 24185
Dust retention capacity:	380 g/m²
Note:	filter media is washable about 10 times
Weight:	4.5 kg
Approvals:	CE; UL E237844; CSA





technical drawing

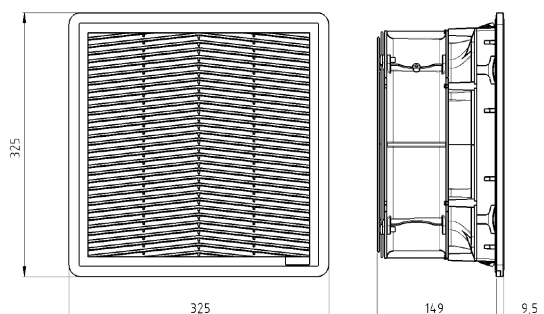

mounting cut-out



IP 51

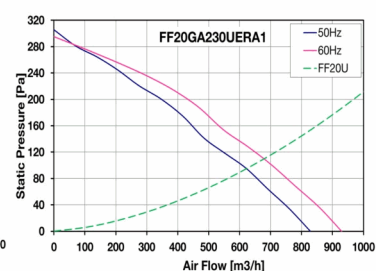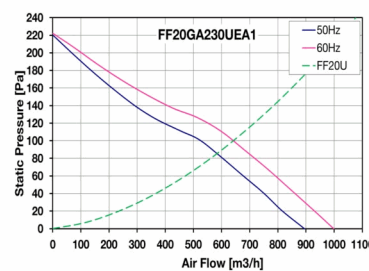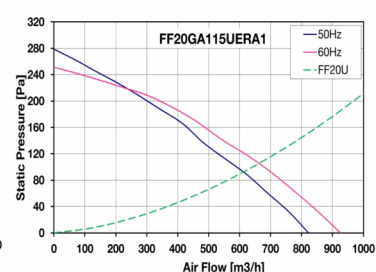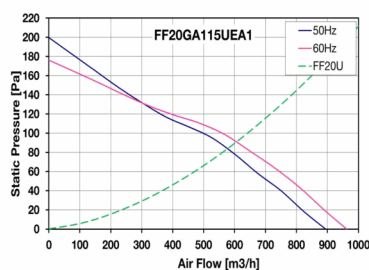

ВЕНТИЛЯТОРЫ.RU

 МАГАЗИН ПРОМЫШЛЕННЫХ ВЕНТИЛЯТОРОВ

Model	Voltage	Frequency	Rated Current	Rated Power	Max Air Flow	Static Pressure	Fan Noise	Rated Temp. Range	Approvals
	(V)	(Hz)	(A)	(W)	(m3/h)	(Pa)	[db(A)]	(°C)	
FF20GA115UEA1	115 V a.c.	50/60	1.01/1.37	110/156	893/960	200/176	67.0/71.0	-10 + +55	CE; cURus; cCSAus; cULus
FF20GA115UERA1	115 V a.c.	50/60	0.93/1.27	102/145	820/925	279/251	74.7/78.9	-10 + +55	CE; cURus; cCSAus; cULus
FF20GA230*ERA1	230 V a.c.	50/60	0.53/0.69	120/157	825/930	305/295	67.6/70.6	-10 + +55	CE; cURus; cCSAus; cULus
FF20GA230UEA1	230 V a.c.	50/60	0.53/0.69	120/158	895/998	220/222	66.0/69.2	-10 + +55	CE; cURus; cCSAus; cULus
FF20GA230UEA1-S71	230 V a.c.	50/60	0.53/0.69	120/158	895/998	220/222	66.0/69.2	-10 + +55	CE; cURus; cCSAus; cULus

data with uncertainty of 15%

All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.

E-mail: zakaz@ventilatorry.ru