


"GF" SERIES FILTER UNITS

Description: **Filter**







- Type of material: ABS/PC Alloy
- Standard colour: RAL 7035 - other colors on request
- Protection degree: IP54, according to EN 60529 standard
- Fixing system: hook tightened by a screw (torque wrench setting 0.5 Nm)
- Plate thickness: up to 8 mm and up to 16 mm by cutting the jacks
- Storage temperature: from -40°C to + 70°C
- Type of filter media: thermo-linked progressive structure synthetic fibre
- Filtrating class: class G3, according to EN 779
- Degree of separation: 85% - DIN 24185
- Dust retention capacity: 600 g/m²
- Note: filter media is washable for about 10 times
- Approvals: CE

technical drawing

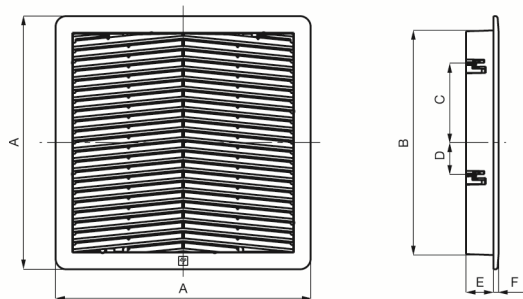

mounting cut-out

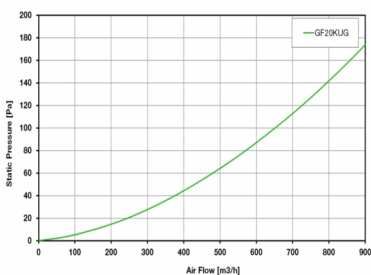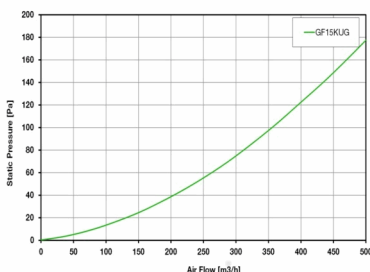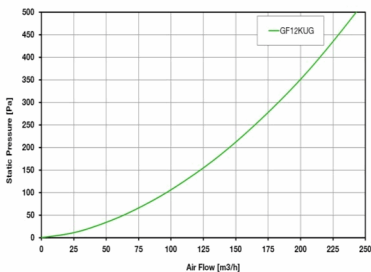

Model	A	B	C	D	E	F	G	Cross section free without media	Weight	Approvals
	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(cm ²)	(Kg)	
GF12KUG	150	124	41.6	-	26.5	4.5	125	94	0.180	CE
GF15KUG	250	222	78.6	31.4	27	5	223	301	0.370	CE
GF20KUG	325	289	95.6	48.4	26.7	5.8	290	580	0.860	CE

data with uncertainty of 15%

All specifications, data and drawing are subject to change without notice and are approximate. Please refer to our terms of sales including our warranty and limited liabilities clauses.