

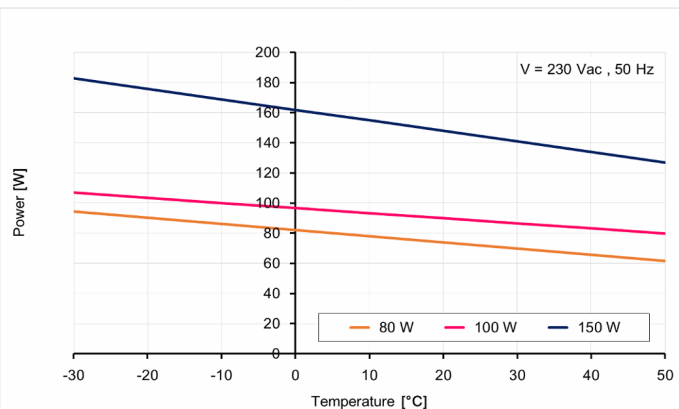


"HTMS" HEATERS WITH TERMINALS

Description: metal cover 80/100/150W

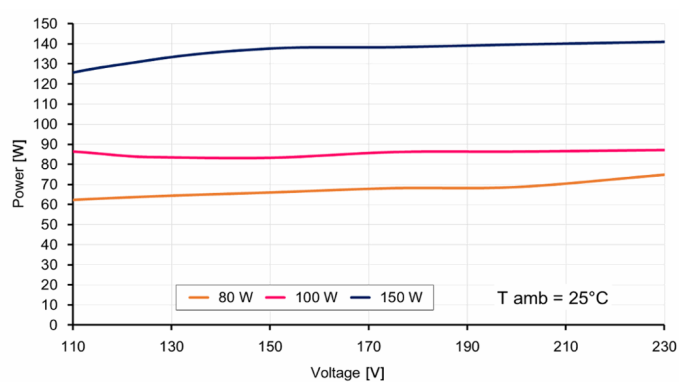

Heating element:	PTC thermistor, self regulating
Heat sink:	black anodised extruded aluminium profile
Cover material:	black anodised aluminium
Method of mounting:	snap-on fixing on RAIL 35mm EN 50022
Rated temperature range:	from -30°C to +50°C
Storage temp. range	from -40°C to +70°C
Protection degree by heaters:	IP20
Electrical connection:	by 3 poles terminal L-N-PE 3 clamps for solid or fine stranded wire 0.5 ÷ 2.5mm ² (20 ÷ 16 AWG)
Appliance class:	class I
Rated frequency:	50/60 Hz
Max voltage:	265 V a.c./d.c.
Applicable standards:	EN 60335-1
Approvals:	CE

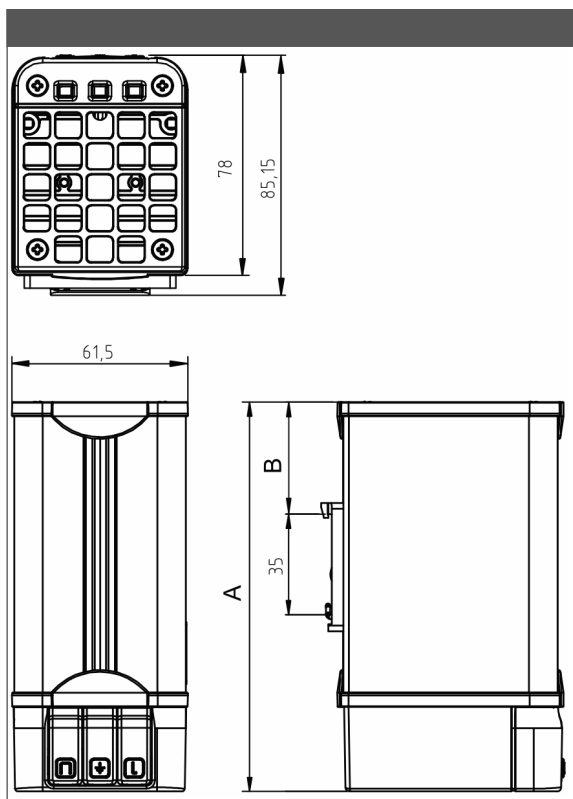

Model	Dimension		Heating Power	I max*	Rated voltage	Weight	Approvals
	A [mm]	B [mm]					
HTMS080X	138	40	80	3.3	110-240 V a.c./d.c.	0.455	CE;
HTMS100X	138	40	100	3.0	110-240 V a.c./d.c.	0.455	CE;
HTMS150X	188	65	150	5.4	110-240 V a.c./d.c.	0.625	CE;

* Maximum transient current within 2 seconds after power on, at worst case (-30°C ambient condition). These values have an uncertainty of 10%.