

"HWM" HEATERS WITH CABLE

Description: metal cover



- Heating element:

Heat sink:

Cover material:

Method of mounting:

Rated temperature range:

Storage temp. range

Protection degree by heaters:

Electrical connection:

External cable:

Appliance class:

Rated frequency:

Max voltage:

Applicable standards:

Approvals:
- PTC thermistor, self regulating

black anodised extruded aluminium profile

black anodised aluminium

snap-on fixing on RAIL 35mm EN 50022

from -30°C to +50°C

from -40°C to +70°C

IP20

by 3 poles cable L-N-PE



3 x 0.50 mm² cable 500 mm lenght, with silicone rubber insulation and external sheath class I

50/60 Hz

265 V a.c./d.c.

EN 60335-1

CE

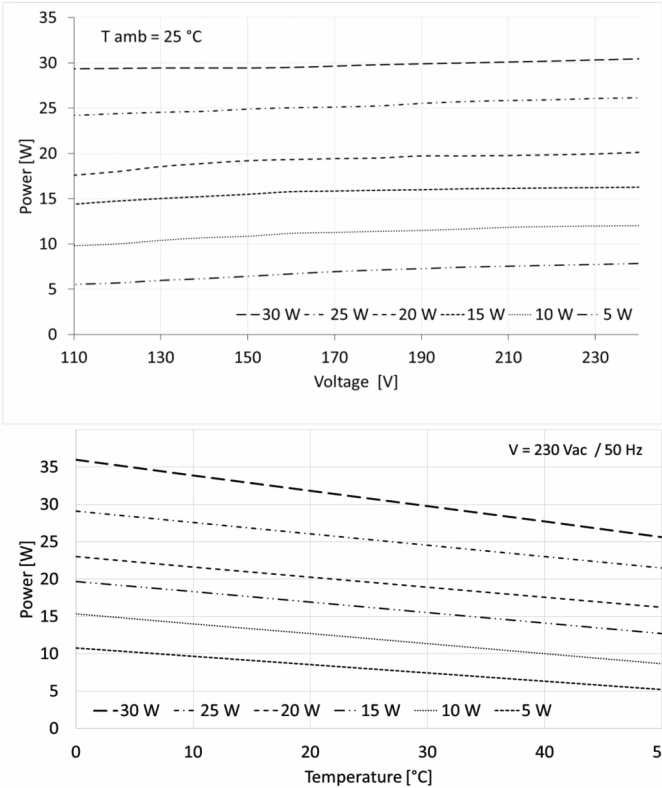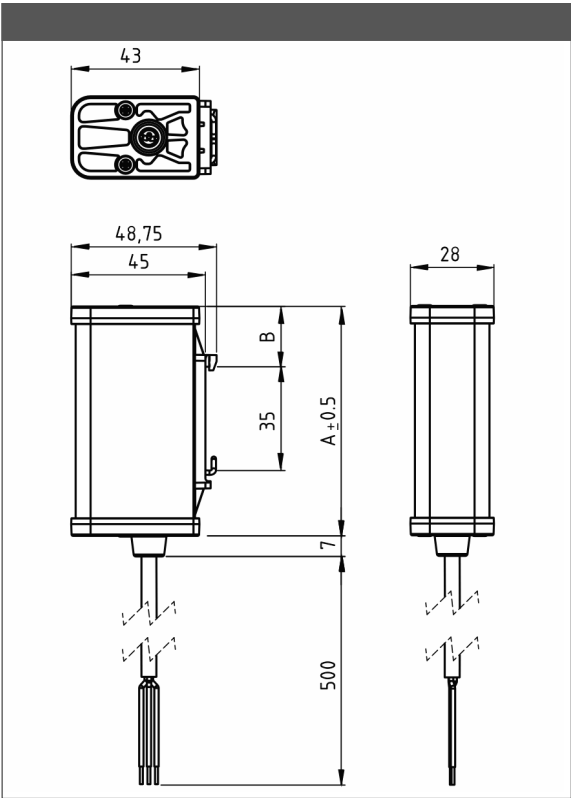

Model	Dimension		Heating Power	I max*	Rated voltage	Weight	Approvals
	A [mm]	B [mm]					
HWM015X	78	20.5	15	2.2	110-240 V a.c./d.c.	0.110	CE;
HWM030X	108	35.5	30	1.1	110-240 V a.c./d.c.	0.150	CE;

* Maximum transient current within 2 seconds after power on, at worst case (-30°C ambient condition). These values have an uncertainty of 10%.