

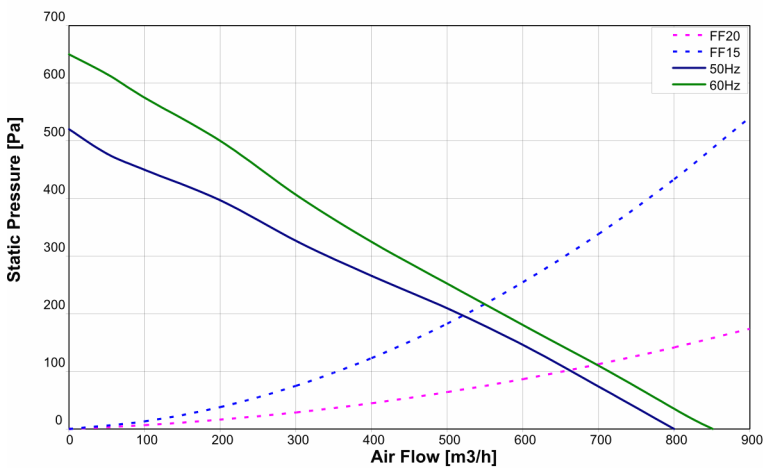


"T22" SERIES

Description: **Roof Exhaust Unit**

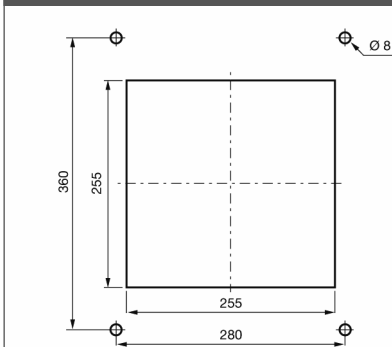

Type of material:	epoxy painted steel casing
Standard colour:	RAL 7032 and RAL 7035
Protection degree:	IP23, according to EN 60529 standard
Fixing method:	By No 4 M6 screws
Plate thickness:	every
Storage temperature:	from -20°C to +70°C
Lifetime L10 at 40°C:	50,000 h
Motor protection:	thermal
Electrical connection:	by 3 core 1.0 mm ² cable (blue, brown, and y/g)
Earth connection:	by yellow/green conductor
Appliance class:	class I
Weight:	6.27 Kg

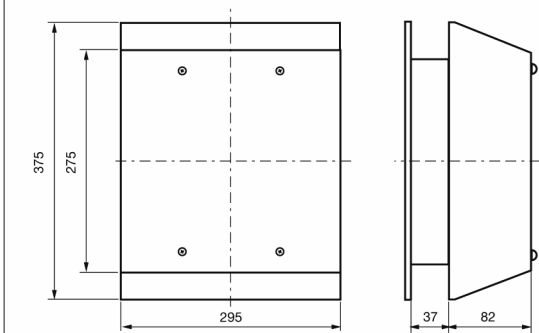

Model	Voltage	Frequency	Rated Current	Rated Power	Max Air Flow**	Static Pressure	Fan Noise	Rated Temp. Range	Approvals
	(V)	(Hz)	(A)	(W)	(m3/h)	(Pa)	[db(A)]	(°C)	
T22U115B	115 V a.c.	50/60	1.10/1.50	130/170	800/850	520/650	74.0/75.6	-20 ÷ +60	CE
T22U230B	230 V a.c.	50/60	0.56/0.70	125/161	800/850	520/650	75.2/76.7	-20 ÷ +60	CE

(*) data with uncertainty of 10%

All specifications, data and drawing are subject to change without notice and are approximate. Please refer to our terms of sales including our warranty and limited liabilities clauses.