


"TP19_IP541" SERIES

Description: **Roof Exhaust Unit IP54 UL**





Type of material:	ABS/PC alloy and aluminium
Standard colour:	RAL 7035 - other colours on request
Protection degree:	IP54, according to EN 60529 Standard Type 12 according to UL 508 Standard
Fixing method:	By No 8 Ø4x16 mm screws for thermoplastic material
Plate thickness:	any
Storage temperature:	from -20°C to +60°C
Motor Lifetime L10 at 25°C 80%RH (approx.):	115V 48,000h 60Hz 230V 62,000h 50Hz; 70,000h 60Hz
Working class of capacitor:	class B
Motor protection:	thermal
Electrical connection:	by terminal block 3 poles L-N-PE
Earth connection:	(by terminal block, PE pole)
Appliance class:	class I
Weight:	2.1 Kg
Type of filter media:	thermo-linked progressive structure synthetic fibre
Filtering class:	class G2 more metallic net according to EN 779
Degree of separation:	67% - DIN 24185 (without net)
Dust retention capacity:	380 g/m ²
Note:	filter media is washable about 10 times
Approvals:	CE, UL E237844, CSA

technical drawing

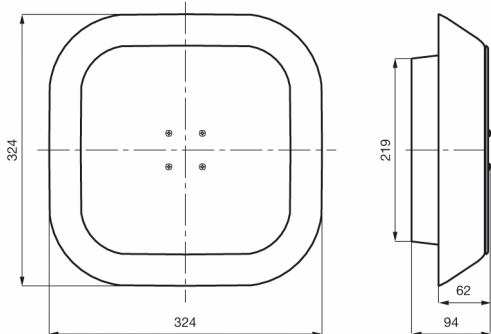

mounting cut-out

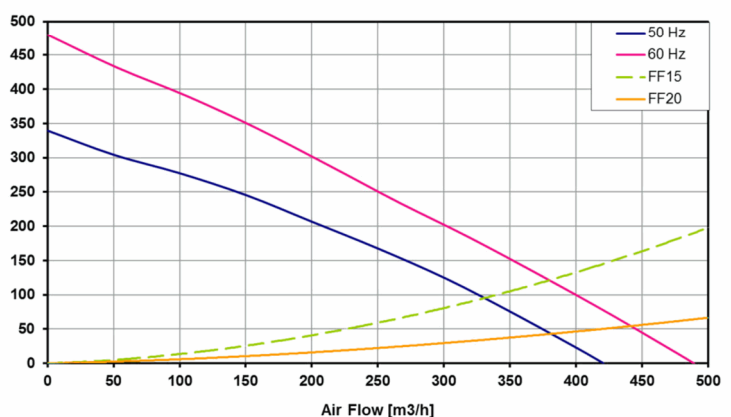

Model	Voltage	Frequency	Rated Current	Rated Power	Max Air Flow**	Static Pressure	Fan Noise	Rated Temp. Range	Approvals
	(V)	(Hz)	(A)	(W)	(m3/h)	(Pa)	[db(A)]	(°C)	
TP19U115B541	115 V a.c.	60	0.85	97	490	480	71.9	-10 - +55	CE; cURus; cCSAus
TP19U230B541	230 V a.c.	50/60	0.310/0.360	70/81	420/490	340/480	67.9/71.0	-10 - +55	CE; cURus; cCSAus

data with uncertainty of 10%

All specifications, data and drawing are subject to change without notice and are approximate. Please refer to our terms of sales including our warranty and limited liabilities clauses.