

"TP19_IP55" SERIES

Description: **Roof Exhaust Unit IP55**



Type of material:

Standard colour:

Protection degree:

Fixing method:

Plate thickness:

Storage temperature:

Motor Lifetime L10 at 25°C

80%RH (approx.):

Working class of capacitor:

Motor protection:

Electrical connection:

Earth connection:

Appliance class:

Type of filter media:

Filtering class:

Degree of separation:

Dust retention capacity:

Note:

Weight:

Approvals:

ABS/PC alloy and aluminium

RAL 7035 - other colours on request

IP55, according to EN 60529 standard

By No 8 Ø4x16 mm screws for thermoplastic material

any

from -20°C to +60°C

115V 75,000h 50Hz; 80,000h 60Hz

230V 59,000h 50Hz; 73,000h 60Hz

class B

thermal

by terminal block 3 poles L-N-PE

(by terminal block, PE pole)

class I

thermo-linked progressive structure synthetic

fibre

class G2 more metallic net according to EN 779

67% - DIN 24185 (without net)


380 m/g²

filter media is washable about 10 times



2.1 Kg

CE

technical drawing

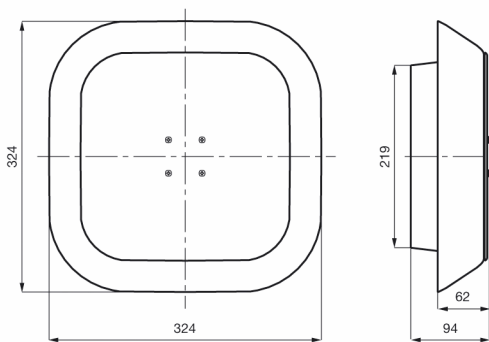

mounting cut-out

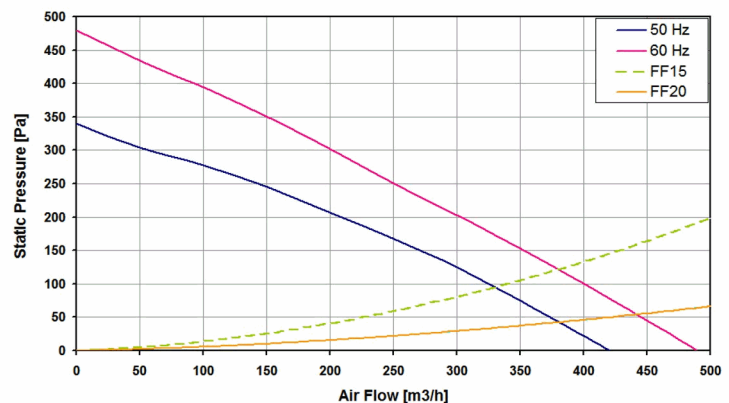

Model	Voltage	Frequency	Rated Current	Rated Power	Max Air Flow**	Static Pressure	Fan Noise	Rated Temp. Range	Approvals
	(V)	(Hz)	(A)	(W)	(m3/h)	(Pa)	[db(A)]	(°C)	
TP19U115B55	115 V a.c.	50/60	0.62/0.64	66/74	420/490	340/480	67.9/71.0	-10 - +60	CE
TP19U230B55	230 V a.c.	50/60	0.309/0.360	70/83	420/490	340/480	67.9/71.0	-10 - +60	CE

data with uncertainty of 10%

All specifications, data and drawing are subject to change without notice and are approximate. Please refer to our terms of sales including our warranty and limited liabilities clauses.