
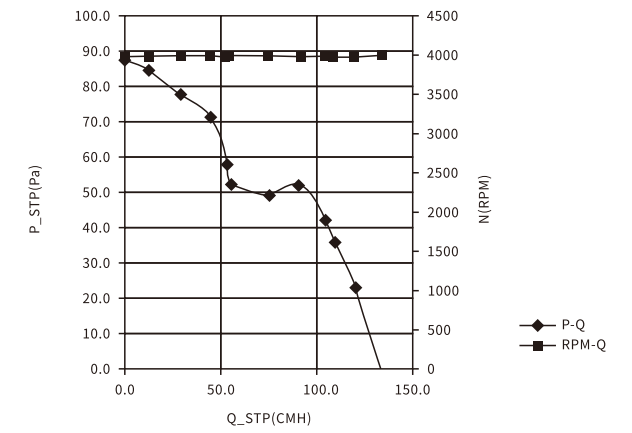


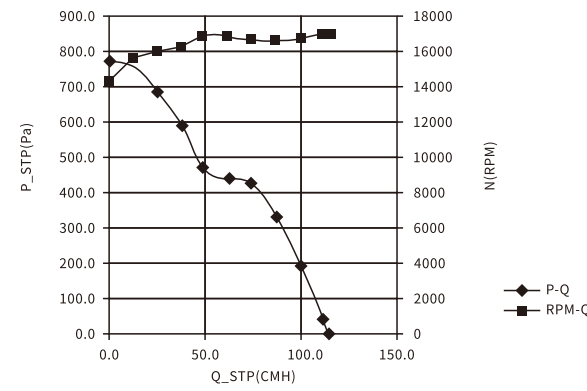

Material: the wind turbine is made of plastic PPE
Type of protection :IP55
Technical features: PWM stepless speed regulation
Bearing : Ball bearing
Protection: Tach output, locked-rotor protection, Current limited
Motor Insulation Class:F
Direction of rotation: Unticlockwise, see on the leads
Amb Temp:-25°C~+70°C

材料:风轮采用塑料PPE制成
电机防护等级:IP55
电气性能:PWM无极调速
轴承:滚珠轴承
保护:具有速度反馈输出、堵转、限流保护
绝缘等级:F级
转向:从引出线看为逆时针
工作温度范围:-25°C~+70°C

Material: the wind turbine is made of plastic PPE
Type of protection :IP55
Technical features: PWM stepless speed regulation
Bearing : Ball bearing
Protection: Tach output, locked-rotor protection, Current limited
Motor Insulation Class:F
Direction of rotation: Unticlockwise, see on the leads
Amb Temp:-25°C~+70°C

材料:风轮采用塑料PPE制成
电机防护等级:IP55
电气性能:PWM无极调速
轴承:滚珠轴承
保护:具有速度反馈输出、堵转、限流保护
绝缘等级:F级
转向:从引出线看为逆时针
工作温度范围:-25°C~+70°C

Type	Voltage (VAC)	Current (A)	Power (W)	Speed (rpm)	Pressure (Pa)	Airflow (CFM)	Noise Lp:dB(A)
AF06038-48U-000	48	0.51	24	17000	951	110	67

Type	Voltage (VAC)	Current (A)	Power (W)	Speed (rpm)	Pressure (Pa)	Airflow (CMH)	Noise Lp:dB(A)
AF09225-48L-000	48	0.17	8.2	4000	137	88	52

