

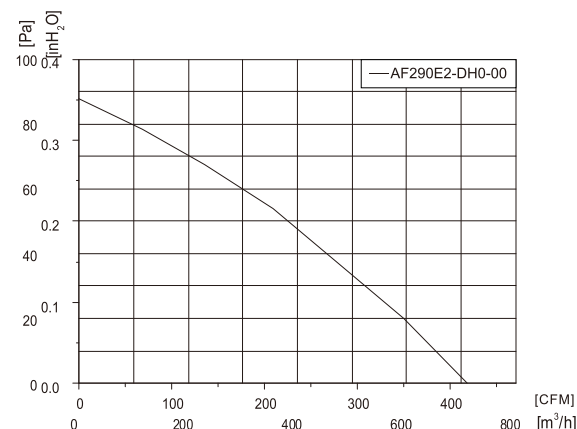


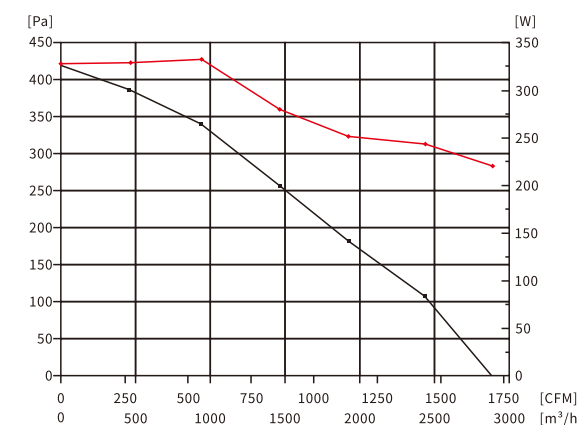

Material: The impeller made of plastic PA66
Type of protection : IP22
Technical features: Control input 0~10VDC/PWM
Bearing : Ball bearing
Protection: Tach output, locked-rotor protection, Current limited, soft start
Motor Insulation Class: F
Direction of rotation: Unclockwise, see on the leads
Approvals: CCC
Amb.Temp:-25°C~+60°C

材料:风轮采用塑料PA66制成
电机防护等级:IP22
电气性能:采用0-10VDC控制电压或脉宽调制
轴承:滚珠轴承
保护:具有速度反馈输出、堵转、限流保护和软启动
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证:CCC
工作温度范围:-25°C~+60°C

Type	Motor	Voltage (VDC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp.dB(A)
AF290E2-DH0-00	DM055E2-DH0-03	310	/	712	419	1400	54	0.17	53

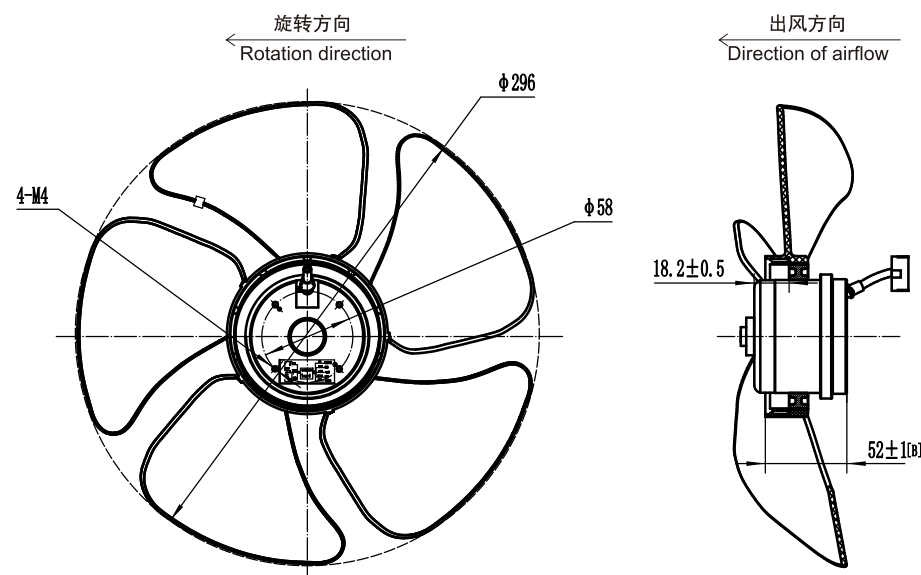

Material: The impeller made of plastic PA66
Type of protection : IP68
Bearing : Ball bearing
Protection: Tach output, locked-rotor protection, Current limited, Soft start
Motor Insulation Class: F
Direction of rotation: Clockwise, see on the leads
Amb Temp: -40°C~+85°C

材料:风轮采用黑色PA66材料
电机防护等级:IP68
轴承:滚珠轴承
保护:具有速度反馈输出、堵转、限流保护和软启动
绝缘等级:F级
转向:从引出线看为逆时针
工作温度:-40°C~+85°C

Type	Motor	Voltage (VDC)	Current (A)	Power (W)	Speed (rpm)	Airflow (m³/h)	Airflow (CFM)	Noise Lp.dB(A)
AF300F4-060-000	DI060F4-00000	26	8.7	226	3300	2800	1647	76

