

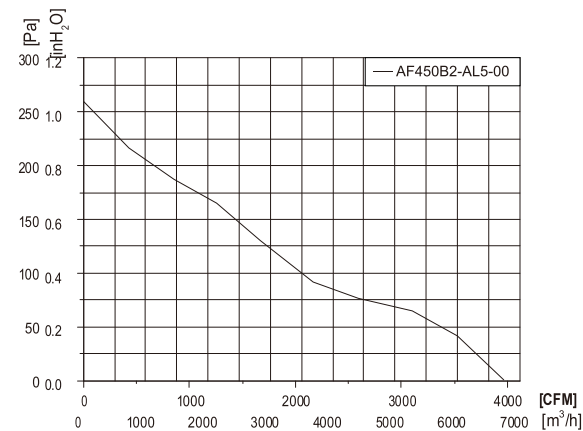


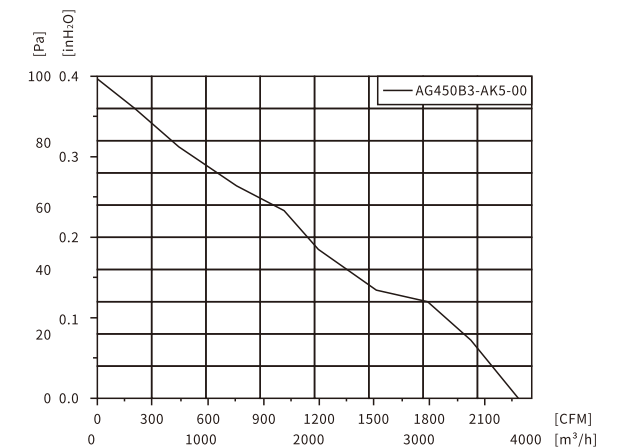

Material: Impeller made of cold rolled steel
Type of protection: IP54
Bearing: Ball bearing
Protection: Thermal overload protector (TOP) wired internally
Motor Insulation Class: F
Direction of rotation: Clockwise see on the leads
Approvals: CE, CCC
Amb Temp: -40°C~+65°C

材料:风轮采用SPCC制成
电机防护等级:IP54
轴承:滚珠轴承
保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为顺时针
产品符合的认证:CE、CCC
工作温度范围:-40°C~+65°C

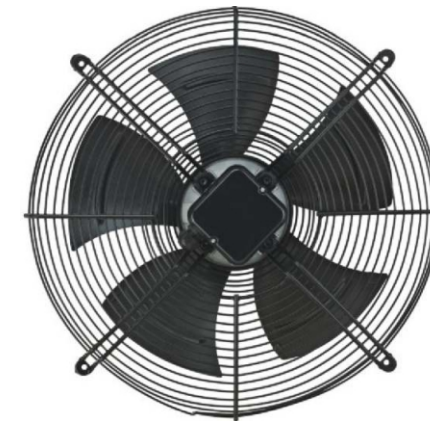

Material: Impeller made of cold rolled steel
Type of protection: IP44
Bearing: Ball bearing
Protection: Thermal overload protector (TOP) wired internally
Motor Insulation Class: F
Direction of rotation: Clockwise, see on the leads
Approvals: CCC
Amb Temp: -40°C~+65°C

材料:风轮采用SPCC制成
电机防护等级:IP44
轴承:滚珠轴承
保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为顺时针
产品符合的认证:CCC
工作温度范围:-40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)	Connection way
AF450B2-AL5-00	AM106B2-AL5-04	3~400	50	6800	4002	1350	480	1.2	75	△

Type	Motor	Voltage (VAC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)	Connection way
AG450B3-AK5-00	AM074B3-AK5-01	3~380	50	4000	2354	860	135	0.36	63	Y

