

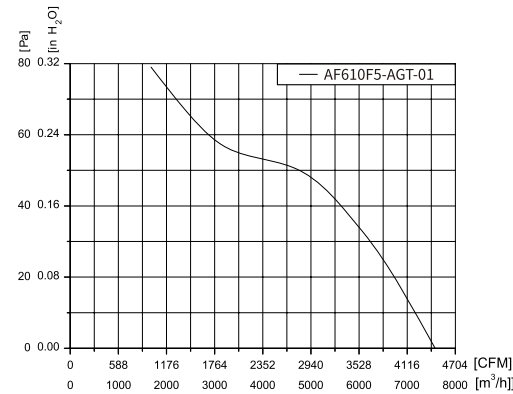
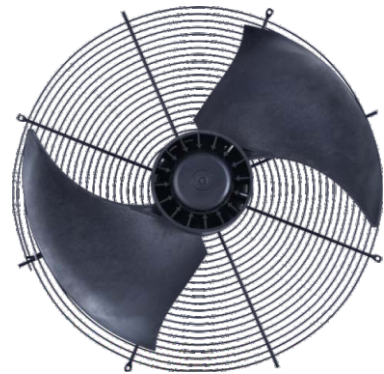


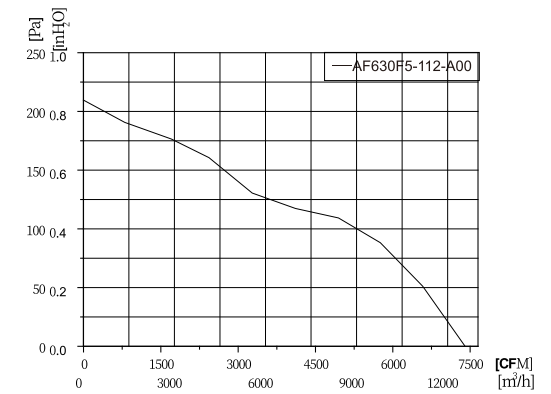

Material:
Fan guard : Steel, and coated in matt black
Impeller : Black plastic AS+25%GF
Rotor : Coated in black
Electronics enclosure : Die-cast aluminium
Number of blades : 2
Direction of rotation : Anticlockwise, seen on the leads.
Type of protection : Ip54
Mounting position : Shaft horizontal or rotor on bottom
Rotor on top on request
Operation mode : (S1)
Bearing : Ball bearing
Technical features: Control input 0~10VDC/PWM Output 10VDC+10%, max.10mA Tach output Alarm relay
Protection:
Line undervoltage, motor current limitatin
Locked-rotor protection, Soft start
Thermal protector
Motor Insulation Class: F
EMC : According to EN61000-6-3/2,EN61000-3-2/3
Approvals: CCC
Amb.Temp: -25°C~+60°C

材料:
网罩:钢, 表面喷亚光黑
风轮:采用黑色AS+25%GF塑料制成
转子: 镀黑
电气罩: 压铸铝
叶片数:2
转向:从引出线看为逆时针
电机防护等级:IP54
安装位置:垂直于水平线2个方向
连续工作制: (S1)
轴承:免维护, 滚珠轴承
电气特性:控制信号输入0~10VDC/PWM
一路辅助电源输出:10VDC+10%, max.10mA
速度反馈信号 报警信号继电器
保护:限流、堵转、软启动和热保护
绝缘等级:F级
EMC: 符合EN61000-6-3/2,EN61000-3-2/3
产品符合的认证:CCC
工作温度范围:-25°C~+60°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
AF610F5-AGT-01	DM088F5-AGT-07	1~230	50/60	7300	4297	950	215	1.4	63

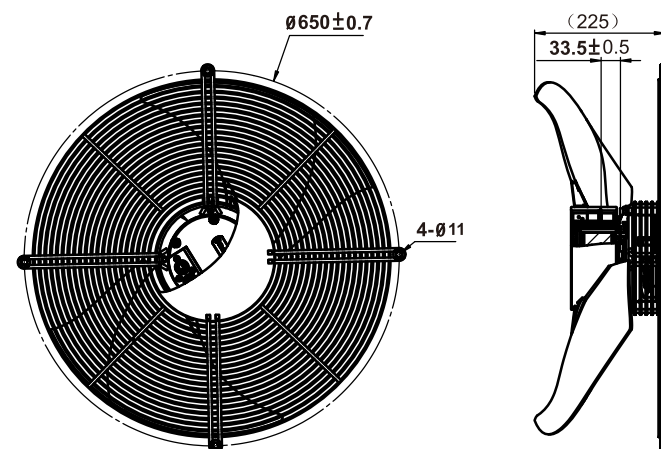

Material:
Fan guard : Steel, and coated in matt black
Inlet ring : Cold-roll sheet steel and coated in black or white plastic
Impeller : Completely made of aluminum metal
Rotor : Coated in black
Electronics enclosure : Die-cast aluminium
Number of blades : 5
Direction of rotation : Anticlockwise, seen on the leads.
Type of protection : Ip54
Mounting position : Shaft horizontal or rotor on bottom
Rotor on top on request
Operation mode : (S1)
Bearing : Ball bearing
Technical features: Control input 0~10VDC/PWM Output 10VDC+10%, max.10mA
Integrated PID controller,Tach output, Alarm relay, RS485 MODBUS
Protection:
Line undervoltage, motor current limitatin
Locked-rotor protection, Soft start
Thermal protector
Motor Insulation Class: F
EMC : According to EN61000-6-3/2,EN61000-3-2/3
Approvals: CCC, CE
Amb.Temp: -25°C~+60°C

材料:
网罩:钢, 表面喷亚光黑
导风圈:冷轧钢, 表面喷哑光黑或白
风轮:采用铝合金铸造制成
转子:电泳, 黑色
电气罩: 压铸铝
叶片数:5
转向:从引出线看为逆时针
电机防护等级:IP54
安装位置:垂直于水平线2个方向
连续工作制: (S1)
轴承:免维护, 滚珠轴承
电气特性:控制信号输入0~10VDC/PWM
一路辅助电源输出:10VDC+10%, max.10mA
集成PID调节、速度反馈信号、报警信号继电器
RS485通信功能
保护:限流、堵转、软启和热保护
绝缘等级:F级
EMC:符合EN61000-6-3/2,EN61000-3-2/3
产品符合的认证:CCC, CE
工作温度范围:-25°C~+60°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
AF630F5-112-A00	DE112.000.00100	230	50/60	12500	7357	930	588	3.64	72

