

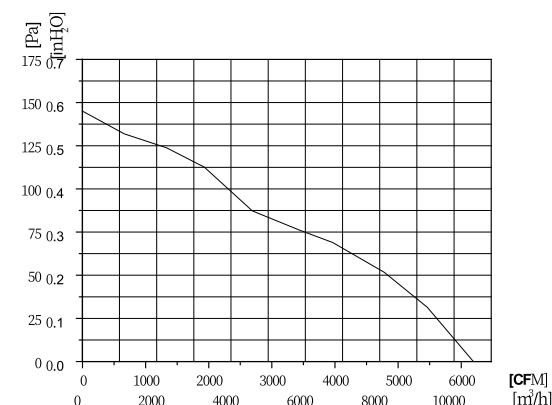


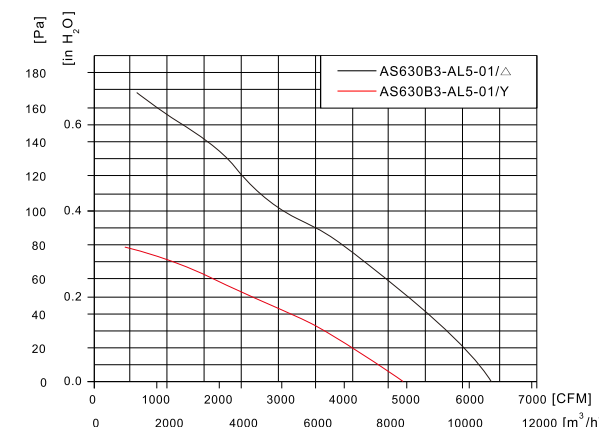

Material: Impeller made of cold rolled steel
Type of protection: IP54
Bearing: Ball bearing
Protection: Thermal overload protector (TOP) wired internally
Motor Insulation Class: F
Direction of rotation: Unticlockwise see on the leads
Approvals: CE, CCC
Amb Temp: -40°C~+65°C

材料:风轮采用SPCC制成
电机防护等级:IP54
轴承:滚珠轴承
保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证:CE、CCC
工作温度范围:-40°C~+65°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)	Capacitor (µF/V)
AF630A3-AG5-00	AM106A3-AG5-04	1~230	50	10500	6180	870	570	2.7	72	12/450

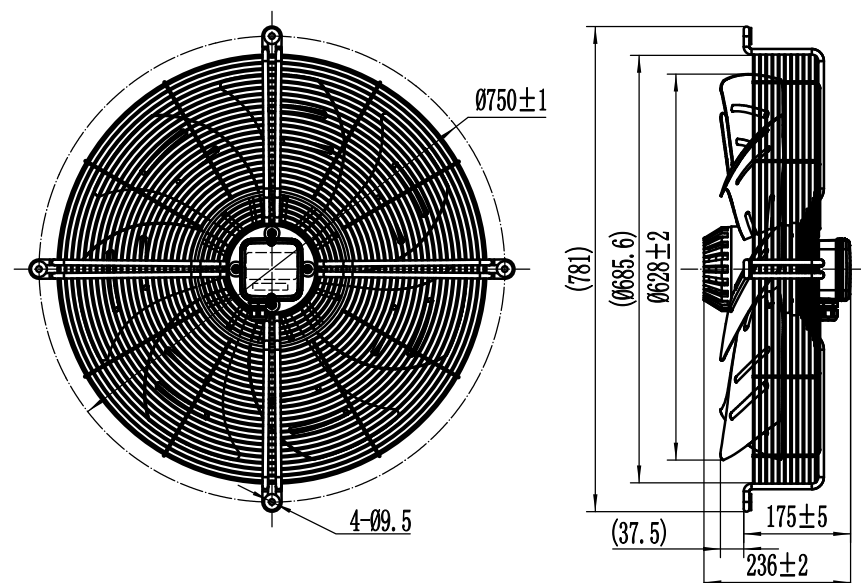

Material: Impeller made of cold rolled steel
Type of protection: IP54
Bearing: Ball bearing
Protection: Thermal overload protector (TOP) wired internally
Motor Insulation Class: F
Direction of rotation: Unticlockwise, see on the leads
Approvals: CCC
Amb Temp: -40°C~+65°C

材料:风轮采用SPCC制成
电机防护等级:IP54
轴承:滚珠轴承
保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证:CCC
工作温度范围:-40°C~+65°C

Type	Motor	Voltage (VAC)	Connection way	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)	Frequency (Hz)
AS630B3-AL5-01	FW106-075SD02	3~400	Δ	10800	6357	900	560	1.4	72	50
			Y	8500	5003	720	250	0.68	68	

