

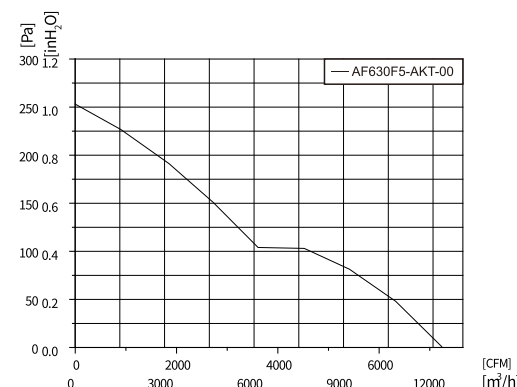


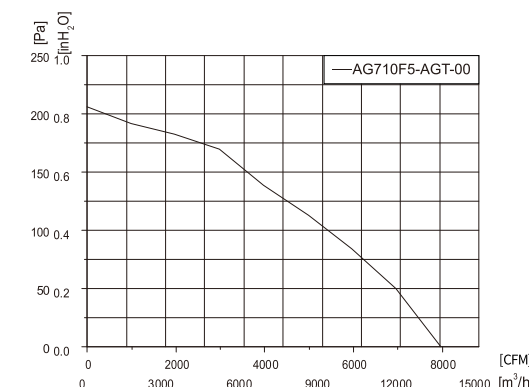

Material:
Fan guard: Steel, and coated in matt black
Inlet ring: Cold-roll sheet steel and coated in black or white plastic
Impeller: Completely made of aluminum metal
Rotor: Coated in black
Electronics enclosure: Die-cast aluminium
Number of blades: 5
Direction of rotation: Anticlockwise, seen on the leads
Type of protection: IP54
Mounting position: Shaft horizontal or rotor on bottom Rotor on top on request
Operation mode: (S1)
Bearing: Ball bearing
Technical features: Control input 0-10VDC/PWM
Output 10VDC+10%, max 10mA
Integrated PID controller
Tach output, Alarm relay
RS485 MODBUS
Protection: Line undervoltage, motor current limitation
Locked-rotor protection, Soft start
Phase failure detection
Thermal protector
Motor
Insulation Class: F
EMC: According to EN61000-6-3/2, EN61000-3-2/3
Approvals: CCC
Amb Temp: -25°C+60°C

材料:
网罩: 钢, 表面喷亚光黑
导风圈: 冷轧钢, 表面喷哑光黑或白
风轮: 采用铝合金铸造制成
转子: 电泳, 黑色
电气罩: 压铸铝
叶片数: 5
转向: 从引出线看为逆时针
电机防护等级: IP54
安装位置: 垂直于水平线2个方向
连续工作制: (S1)
轴承: 免维护, 滚珠轴承
电气特性:
控制信号输入: 0~10VDC/PWM
一路辅助电源输出: 10VDC+10%, max.10mA
集成PID调节速度反馈信号、报警信号继电器
RS485通信功能
保护: 限流、堵转和软启动、缺相保护和热保护
绝缘等级: F级
EMC: 符合EN61000-6-3/2, EN61000-3-2/3
产品符合的认证: CCC
工作温度范围: -25°C~+60°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
AF630F5-AKT-00	DM112F5-AKT-00	3~380	50/60	12200	7181	930	560	1.15	75

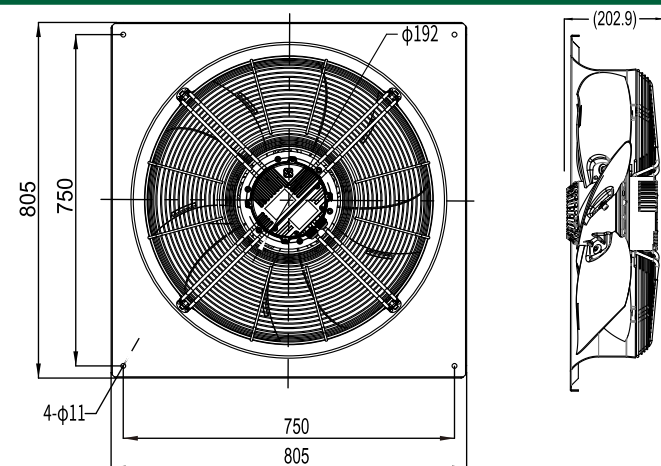

Material:
Fan guard: Steel, and coated in matt black
Inlet ring: Cold-roll sheet steel and coated in black or white plastic
Impeller: Completely made of aluminum metal
Rotor: Coated in black
Electronics enclosure: Die-cast aluminium
Number of blades: 5
Direction of rotation: Anticlockwise, seen on the leads
Type of protection: IP54
Mounting position: Shaft horizontal or rotor on bottom Rotor on top on request
Operation mode: (S1)
Bearing: Ball bearing
Technical features: Control input 0~10VDC/PWM
Output 10VDC+10%, max.10mA Integrated PID controller
Tach output, Alarm relay RS485 MODBUS
Protection:
Line undervoltage, motor current limitation
Locked-rotor protection, Soft start
Thermal protector
Motor
Insulation Class: F
EMC: According to EN61000-6-3/2, EN61000-3-2/3
Approvals: CCC: 2012010401544876
Amb.Temp: -25°C~+60°C

材料:
网罩: 钢, 表面喷亚光黑
导风圈: 冷轧钢, 表面喷哑光黑或白
风轮: 采用铝合金铸造制成
转子: 电泳, 黑色
电气罩: 压铸铝
叶片数: 5
转向: 从引出线看为逆时针
电机防护等级: IP54
安装位置: 垂直于水平线2个方向
连续工作制: (S1)
轴承: 免维护, 滚珠轴承
电气特性: 控制信号输入 0~10VDC/PWM
一路辅助电源输出: 10VDC+10%, max.10mA
集成PID调节、速度反馈信号、报警信号继电器
RS485通信功能
保护: 欠压、限流、堵转、软启动和热保护
绝缘等级: F级
EMC: 符合EN61000-6-3/2, EN61000-3-2/3
产品符合的认证: CCC
工作温度范围: -25°C~+60°C

Type	Motor	Voltage (VAC)	Frequency (Hz)	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)
AG710F5-AGT-00	DM112F5-AGT-00	1~230	50/60	13500	7946	960	520	3.5	75

