

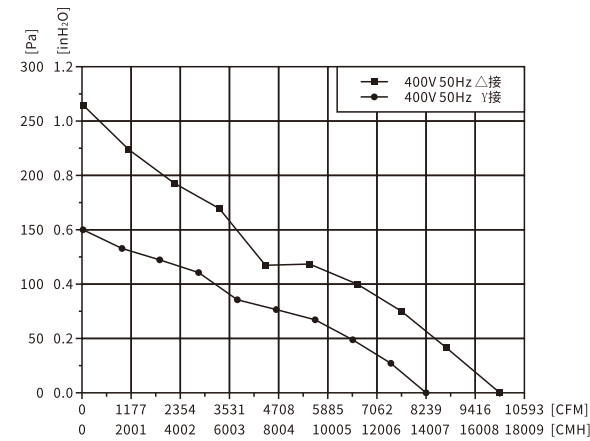
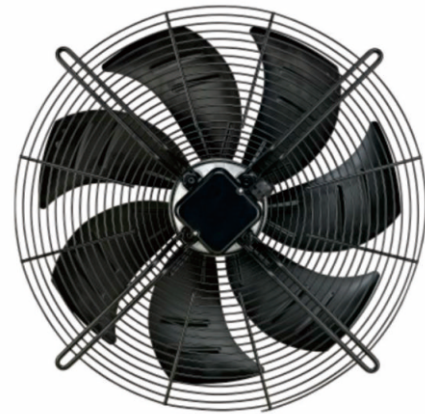


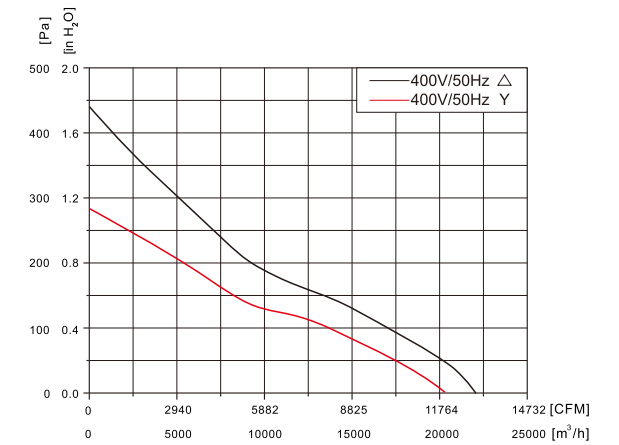

Material: Impeller made of SPCD
Type of protection: IP54
Bearing: Ball bearing
Protection: Thermal overload protector (TOP) wired internally
Motor Insulation Class: F
Direction of rotation: Unticlockwise see on the leads
Approvals: CE, CCC
Amb Temp: -40°C~+65°C

材料:风轮采用SPCD制成
电机防护等级:IP54
轴承:滚珠轴承
保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证:CE、CCC
工作温度范围:-40°C~+65°C

Type	Motor	Voltage (VAC)	Connection way	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)	Frequency (Hz)
AF710B3-AL5-00	FW137-075SD023	3~400	Y	14000	8235	710	800	1.4	75	50
		3~400	△	17000	10000	900	1130	2.35	80	

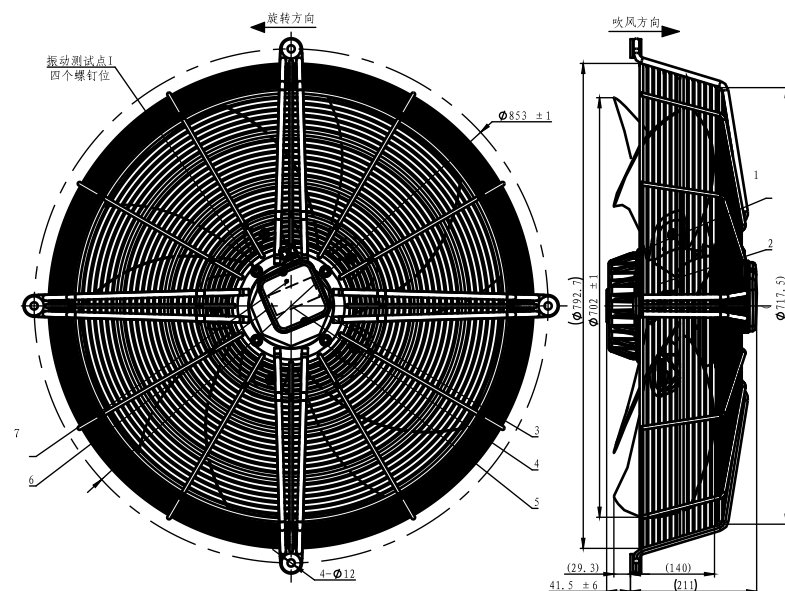

Material: Impeller made of aluminum metal
Type of protection: IP54
Bearing: Ball bearing
Protection: Thermal overload protector (TOP) wired internally
Motor Insulation Class: F
Direction of rotation: Unticlockwise, see on the leads
Approvals: CE
Amb Temp: -40°C~+65°C

材料:风轮采用铝合金制成
电机防护等级:IP54
轴承:滚珠轴承
保护:具有可恢复性热保护功能
绝缘等级:F级
转向:从引出线看为逆时针
产品符合的认证:CE
工作温度范围:-40°C~+65°C

Type	Motor	Voltage (VAC)	Connection way	Airflow (m³/h)	Airflow (CFM)	Speed (rpm)	Power (W)	Current (A)	Noise Lp:dB(A)	Frequency (Hz)
AF800B3-AL5-00	AM137B3-AL5-03	3~400	△	23000	13537	940	1750	4.2	79	50
			Y	21000	12360	850	1350	2.3	74	

